

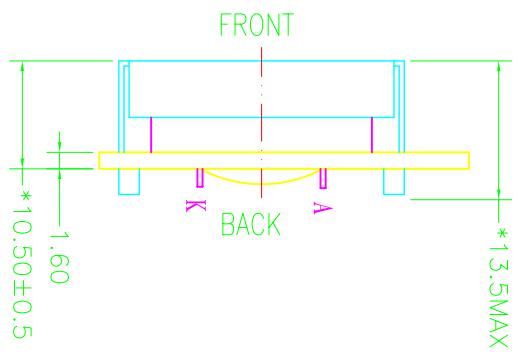


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	Oct-20-2007

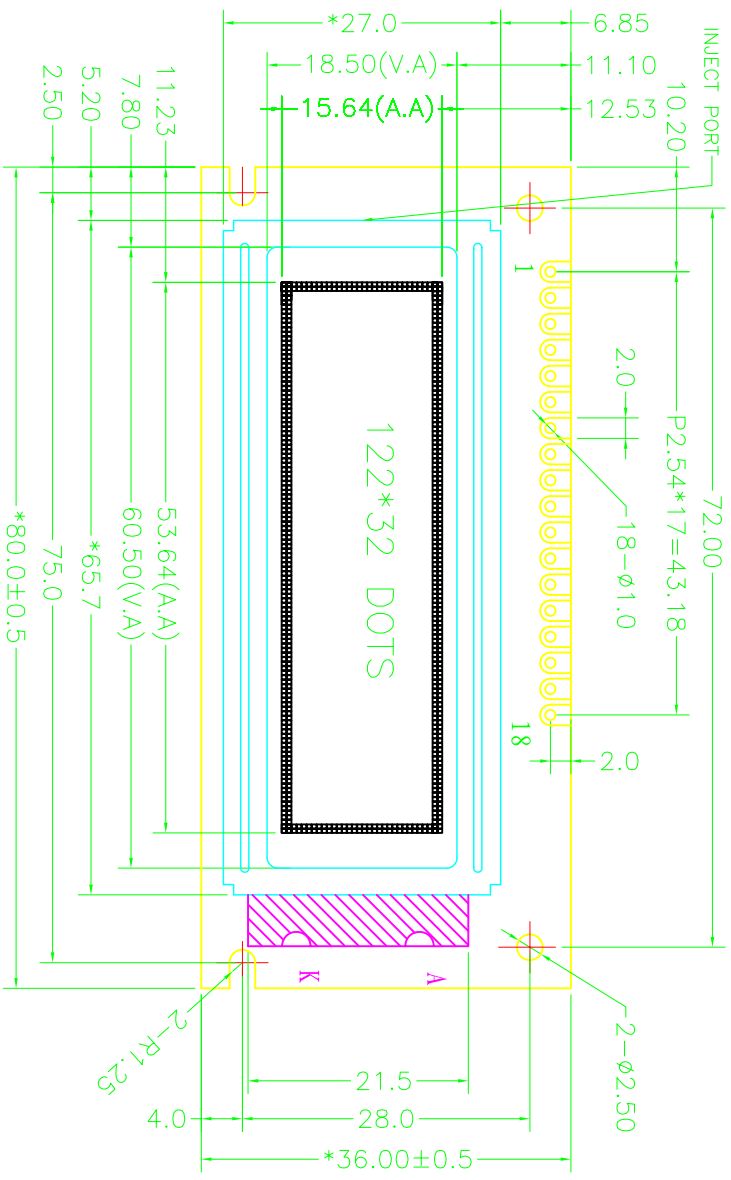


DOTS SIZE
SCALE 10:1

VIEWING DIRECTION



Specification:

- 1). Driving: Duty:1/32,Bias:1/5, VLCD:4.5V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode:FSTN/Positive/Transflective
- 4). Operating temp.: -15°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Drive IC: PT6520
- 6). Backlight: Side, White
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9
CONNECTION	VSS	VDD	VO	A0	E1	E2	R/W	DB0	DB1
PIN	10	11	12	13	14	15	16	17	18
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	RST	LEDA	LEDK



深圳秋田电子有限公司
SHENZHEN AUIDISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	APPROVALS 签字	UNIT 单位 mm
ABG122032G04-FHW-R			ABG122032G04-FHW-R	APP: CHK: DWN:	DATE
SCALE 比例			FIT 适应图面		
SHEET: 页次			1 OF 1		
GENERAL TOL: ±0.3			公差		
DO NOT SCALE THIS DRAWING.					