




| REV 版本 | DESCRIPTION 描述 | DATE 日期 |
|--------|----------------|-------------|
| A00 | First issue | OCT-24-2007 |

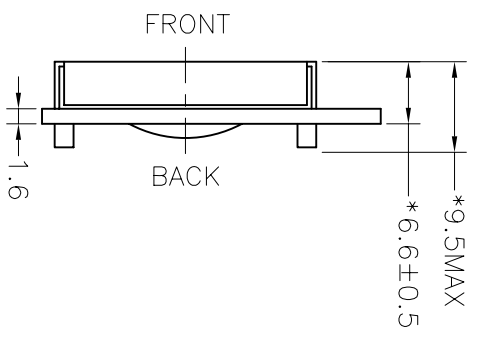

DOT SIZE
SCALE: 10:1

VIEWING DIRECTION

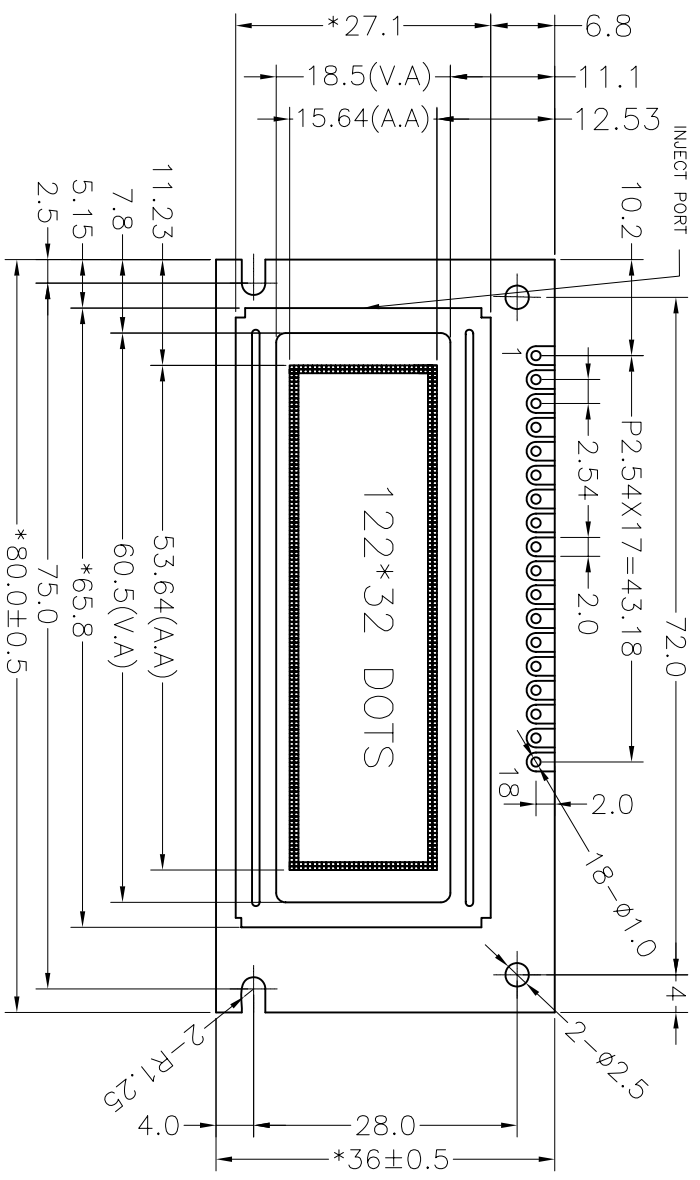

- Specification:
- 1). Driving: Duty:1/32, Bias:1/5, VDD:5.0V, VLCD:4.5V
 - 2). Viewing direction: 6 O'clock
 - 3). Display mode: FSTN/Positive/Reflective/Grey
Operating temp.: -20°C~+70°C
 - 4). Storage temp.: -30°C~+80°C
 - 5). IC: PT6520
 - 6). Backlight: None
 - 7). Dimensions with mark "*" are important, with mark "()" are referenced
 - 8). All the raw materials are RoHS compliant.

| | | | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| CONNECTOR | VSS | VDD | VO | AO | E1 | E2 | R/W | DB0 | DB1 |
| PIN | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| CONNECTOR | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | RST | NC | NC |

深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

| | | | | | |
|--------------------|--------|-------------------|----------------------|--------------------|----------|
| PART NO: 零件编号 | CD 结构图 | PROJECTION 三角法 | MODEL NUMBER 模组型号 | SCALE 比例 | FTT 适应图面 |
| ABG122032G06-FGN-R | | | ABG122032G06-FGN-R | SHEET: 页次 | 1 OF 1 |
| | | | | GENERAL TOL: 公差 | ±0.3 |
| | | | | APP: 签字 | |
| | | | | CHK: 日期 | |
| | | | | DWN: 日期 | |