

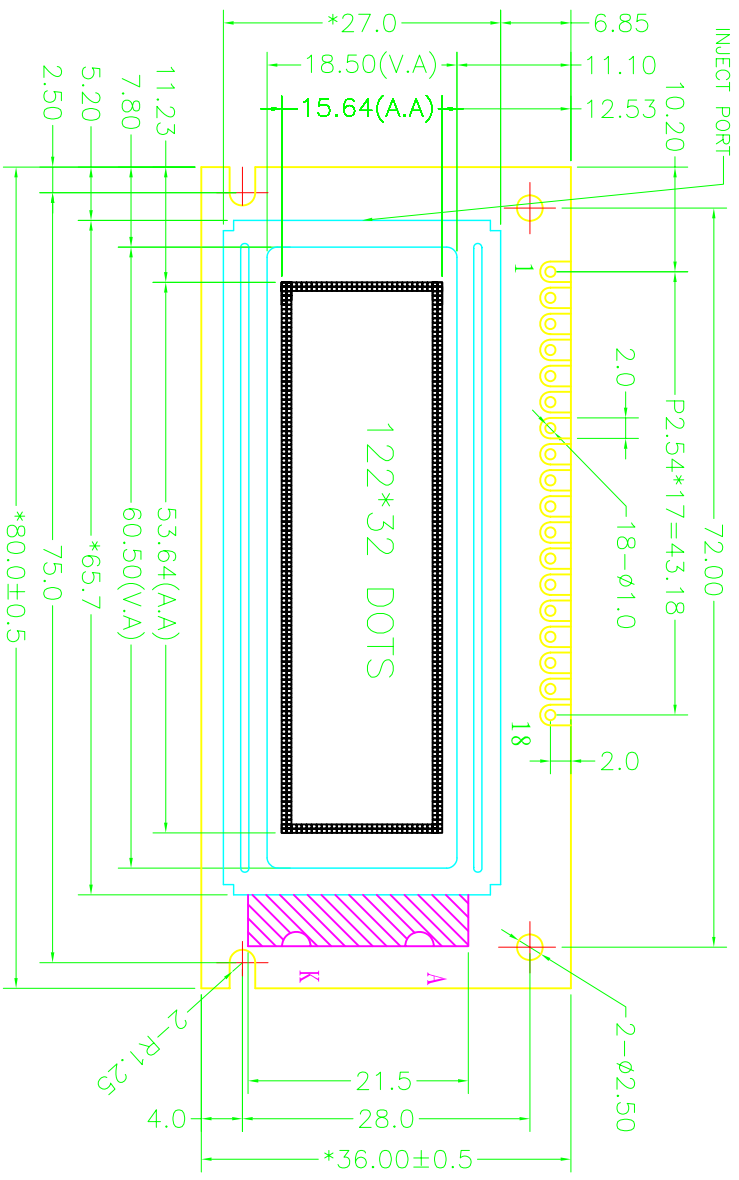


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	Oct-20-2007



VIEWING DIRECTION

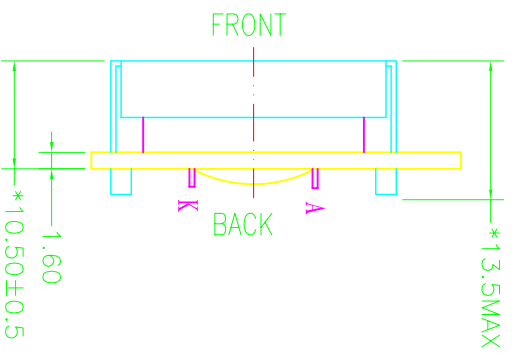

DOTS SIZE
SCALE 10:1

Specification:

- 1). Driving: Duty:1/32, Bias:1/5, VLCD:4.5V, VDD:5.0V
- 2). Viewing angle: 6 0'clock
- 3). Display mode: FSTN/Negative/Transmissive
- 4). Operating temp.: -15°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Drive IC: PT6520
- 6). Backlight: Side, White
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9
CONNECTION	VSS	VDD	V0	A0	E1	E2	R/W	DB0	DB1
PIN	10	11	12	13	14	15	16	17	18
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	RST	LEDA	LEDK

深圳秋田电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	APPROVALS 签字	SCALE 比例	FTT 适应图面
ABG122032G05-MIW-R			ABG122032G05-MIW-R	APP: 代泽 CHK: 魏芹英 DWN: 郑学东	SHEET: 1 OF 1	UNIT 单位 mm
GENERAL TOL: ±0.3				DATE		

DO NOT SCALE THIS DRAWING.