

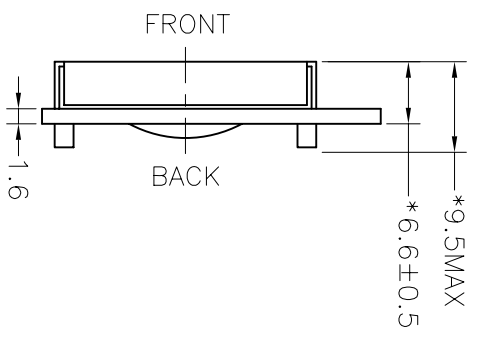


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	OCT-24-2007

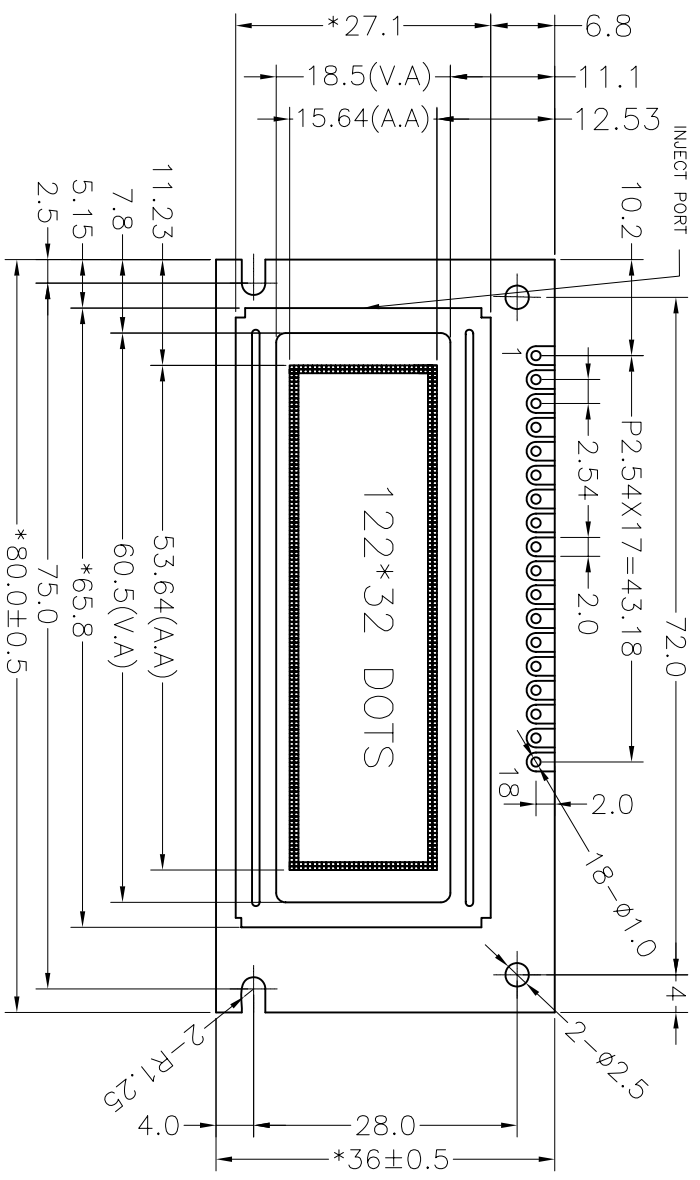


DOT SIZE  
SCALE: 10:1

VIEWING DIRECTION





- Specification:
- 1). Driving: Duty:1/32, Bias:1/5, VDD:5.0V, VLCD:4.5V
  - 2). Viewing direction: 6 O'clock
  - 3). Display mode: STN/Positive/Reflective/Grey  
Operating temp.: -20°C~+70°C
  - 4). Storage temp.: -30°C~+80°C
  - 5). IC: PT6520
  - 6). Backlight: None
  - 7). Dimensions with mark "\*" are important, with mark "()" are referenced
  - 8). All the raw materials are RoHS compliant.

PIN	1	2	3	4	5	6	7	8	9
CONNECTOR	VSS	VDD	VO	AO	E1	E2	R/W	DB0	DB1
PIN	10	11	12	13	14	15	16	17	18
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	RST	NC	NC



**深圳秋田微电子有限公司**  
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABG122032G07-GGN-R			ABG122032G07-GGN-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				APP: 签字	
				CHK: 日期	
				DWN: 日期	

DO NOT SCALE THIS DRAWING.