



| REV 版本 | DESCRIPTION 描述 | DATE 日期 |
|--------|----------------|-------------|
| A00 | First issue | MAY-18-2007 |

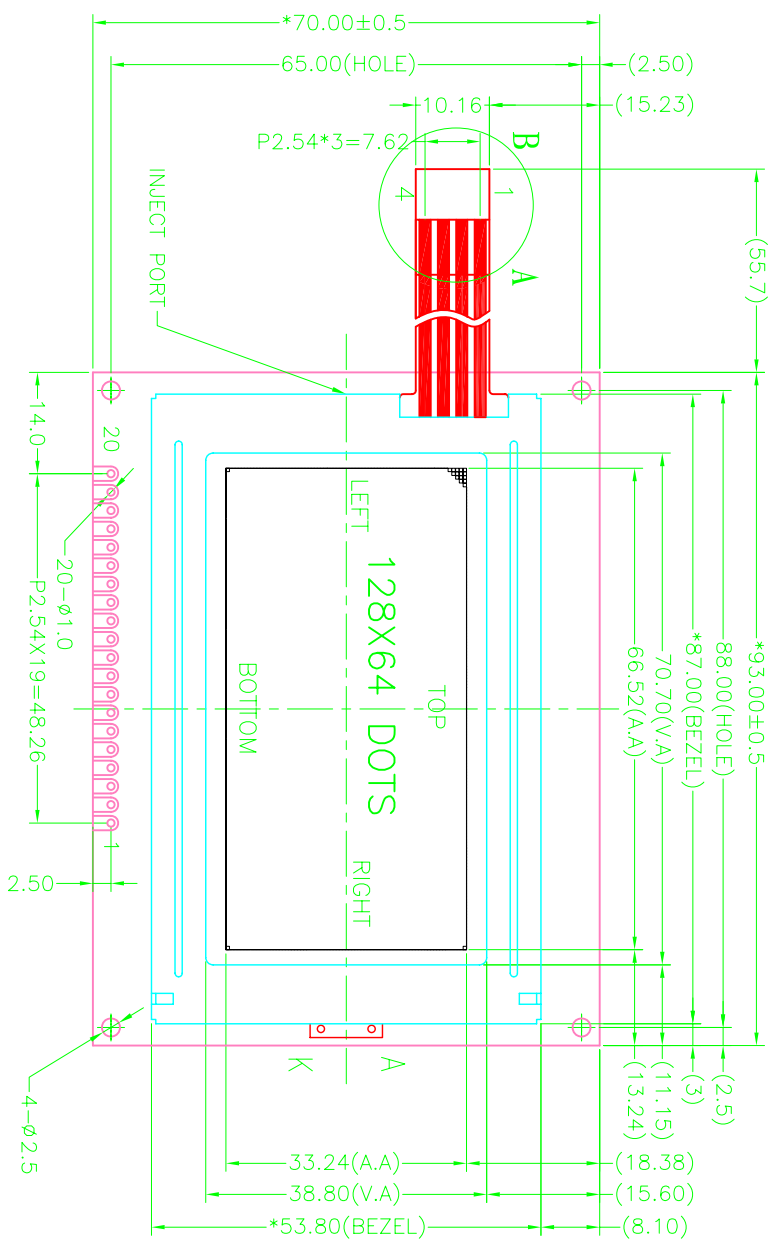

TOUCH PANEL

| PIN | 1 | 2 | 3 | 4 |
|---------|-------|-----|------|--------|
| CONNECT | RIGHT | TOP | LEFT | BOTTOM |

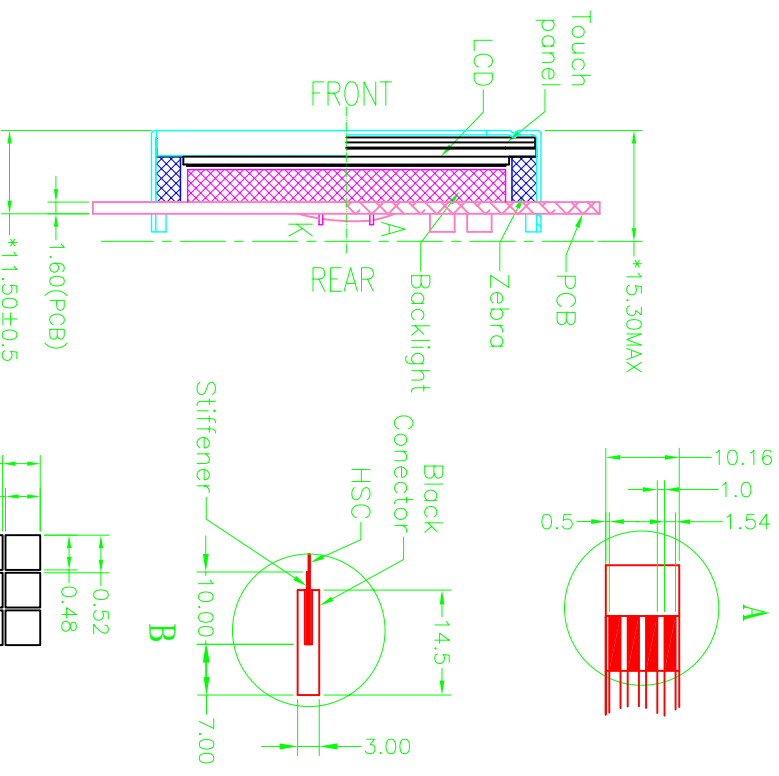

DOTS DETAIL
SCALE:10/1

| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|------------|-----|-----|-----|-----|------|------|-----|-----|------|------|
| CONNECTION | VSS | VDD | V0 | RS | R/W | E | DB0 | DB1 | DB2 | DB3 |
| PIN | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| CONNECTION | DB4 | DB5 | DB6 | DB7 | /CS1 | /CS2 | RST | VEE | LEDA | LEDK |

- Specification:
- 1). Driving: Duty:1/64, Bias:1/6, VLCD:8.0V, VDD:5.0V
 - 2). Viewing angle: 6 O'clock
 - 3). Display mode: STN/Positive/Transflective/YG
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 6). IC: S6B0108&S6B0107
 - 7). Backlight: Bottom YG
 - 8). Dimensions with mark "*" are important, with mark "(") are referenced

深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

| | | | |
|--------------------|------------|--------------------|----------------------|
| PART NO: 零件编号 | C/D结构图 | PROJECTION 三角法 | MODEL NUMBER 模组型号 |
| ABG128064A18-YHY-R | | | ABG128064A18-YHY-R |
| SCALE 比例 | | FIT 适应图面 | |
| SHEET: 页次 | | DATE 日期 | |
| GENERAL TOL: 公差 | | UNIT UNIT 单位 单位 | |
| 0.3 | | mm | |
| APP: 签字 | CHK: 签字 | DWN: 签字 | |

DO NOT SCALE THIS DRAWING.