
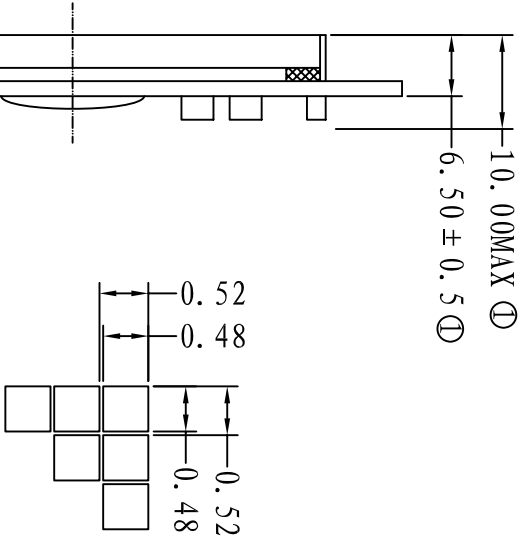


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	SEP-07-2006
A01	Change the dimension ①	JAN-30-2007

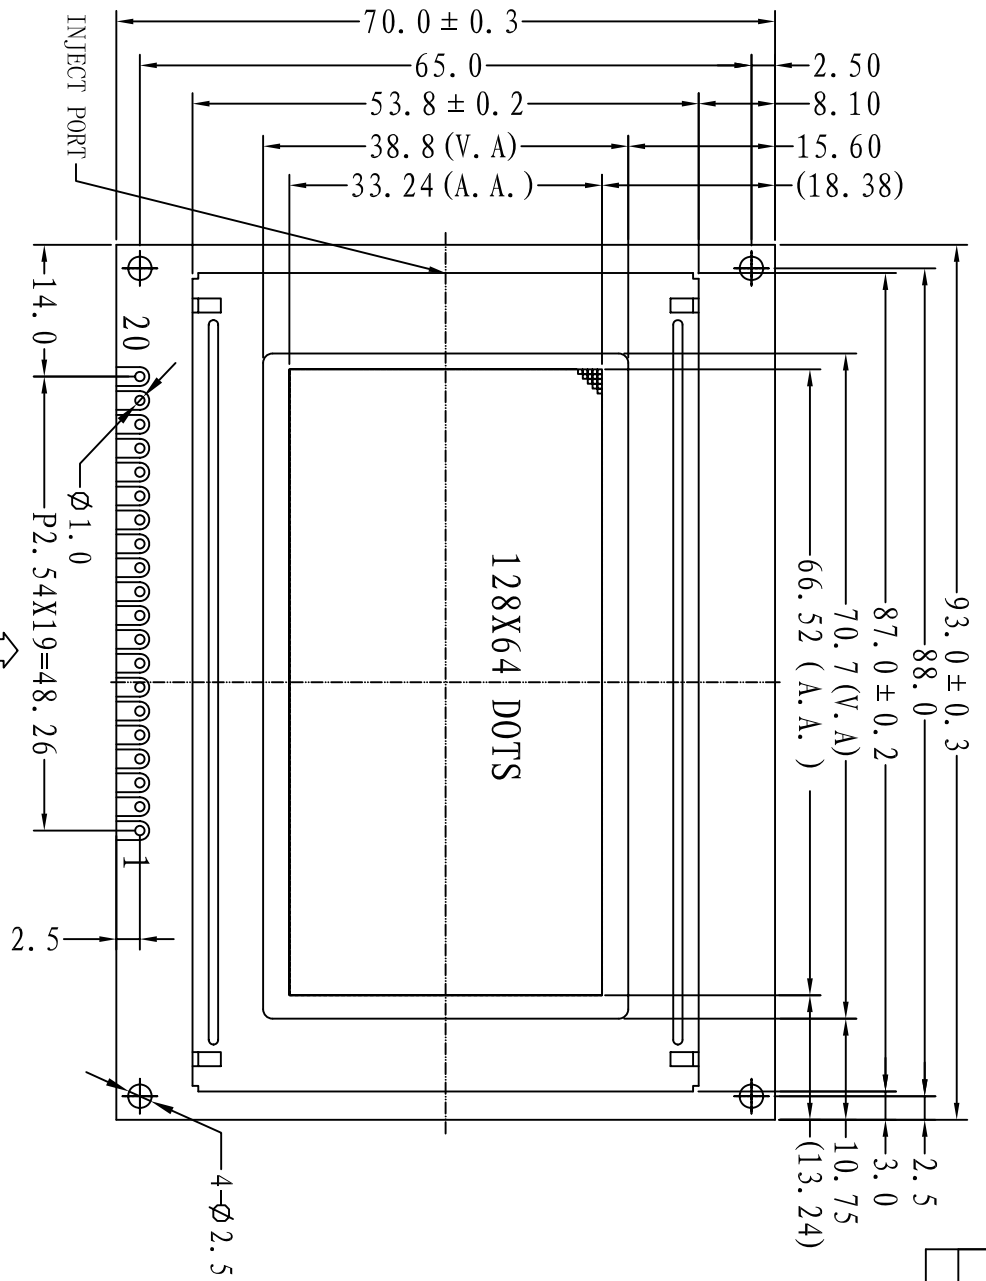

Specification:

- 1). Driving: Duty:1/64, Bias:1/6, VLCD:8.0V(Ref.), VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: FSTN/Positive/Reflective
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). IC: KS0108B
- 7). Backlight: None
- 8). Dimensions with mark "\*" are important, with mark "()" are referenced
- 9). Meet for RoHS

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	/CS1	/CS2	RST	VEE		



深圳市秋田视佳实业有限公司  
SHENZHEN A.V.DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	APPROVALS 签字	UNIT 单位 mm
FAV-ABG128064A09-R-01			ABG128064A09-R-01-R	APP: CHK: DWN:	DATE 日期
SCALE: FIT 适应图面 比例			SHEET: 1 OF 1 页次		
GENERAL TOL: ±0.3 公差			DATE		