

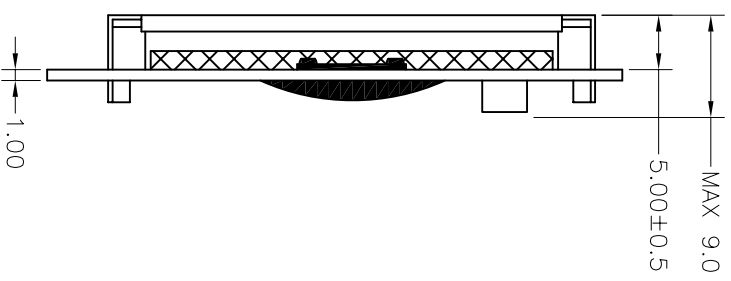


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	APR-04-2006

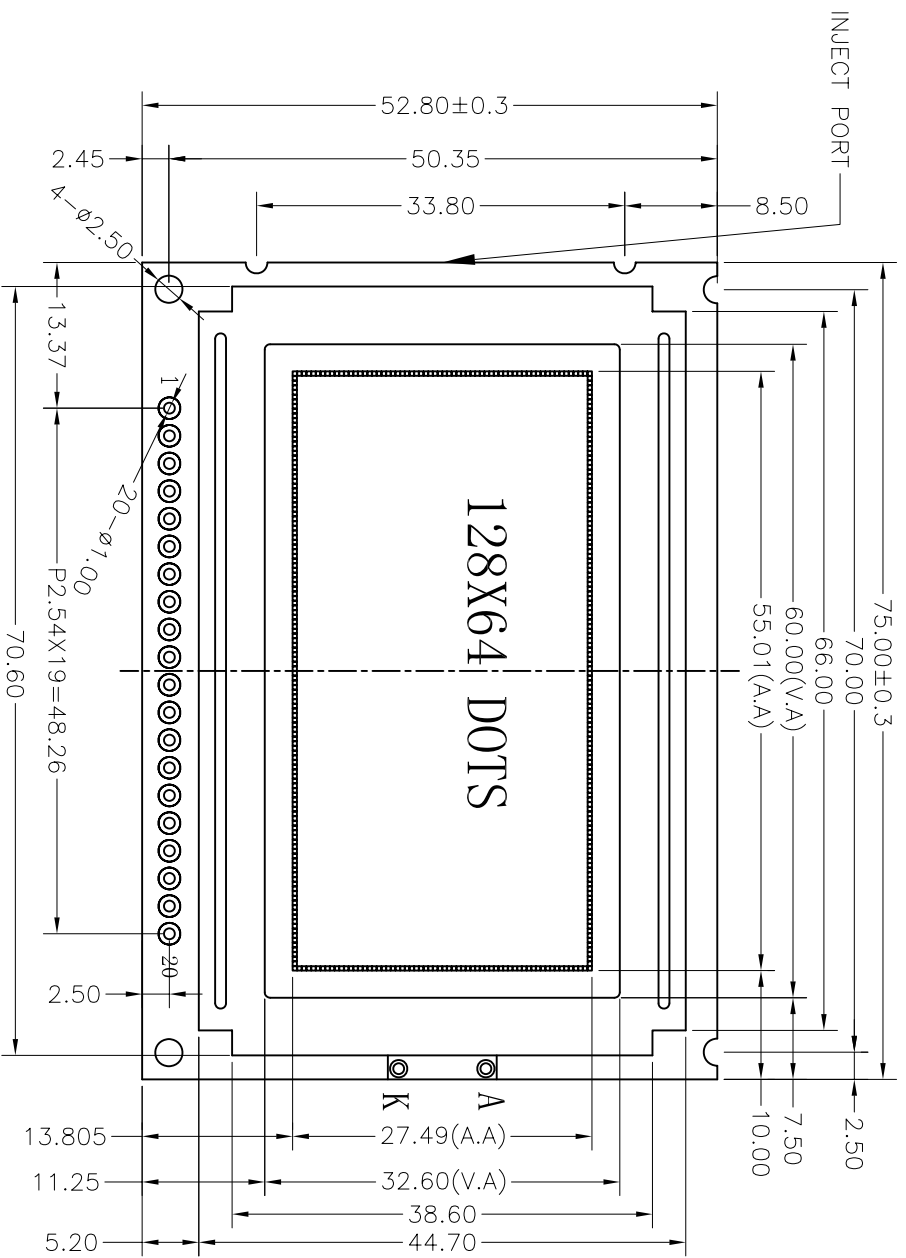

VIEWING DIRECTION

DOT SIZE
SCALE: 5:1

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTOR	VDD	VSS	VLCD	DB0	DB1	DB2	DB3	DB4	DB5	DB6
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTOR	DB7	/CS1	/CS2	RST	R/W	RS	E	VEE	LEDA	LEDK

- Specification:
- 1). Driving: Duty:1/64, Bias:1/9, Vdd:5.0V, Vlcd:8.4V
 - 2). Viewing direction: 6 O'clock
 - 3). Display mode: FSTN/Positive/Transflective
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 6). Drive ic: KS0108B
 - 7). Backlight: Side, Amber,
 - 8). Dimensions with mark "*" are important, with mark "()" are referenced

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAV-ABG128064H00-R-00			ABG128064H00-THA-R
		DO NOT SCALE THIS DRAWING.	
		SCALE: 比例	FIT 适应图面
		SHEET: 页次	1 OF 1
		GENERAL TOL: 公差	±0.3
		APPROVALS 签字	DATE 日期
		CHK:	
		DWN:	