


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	DEC-15-2005

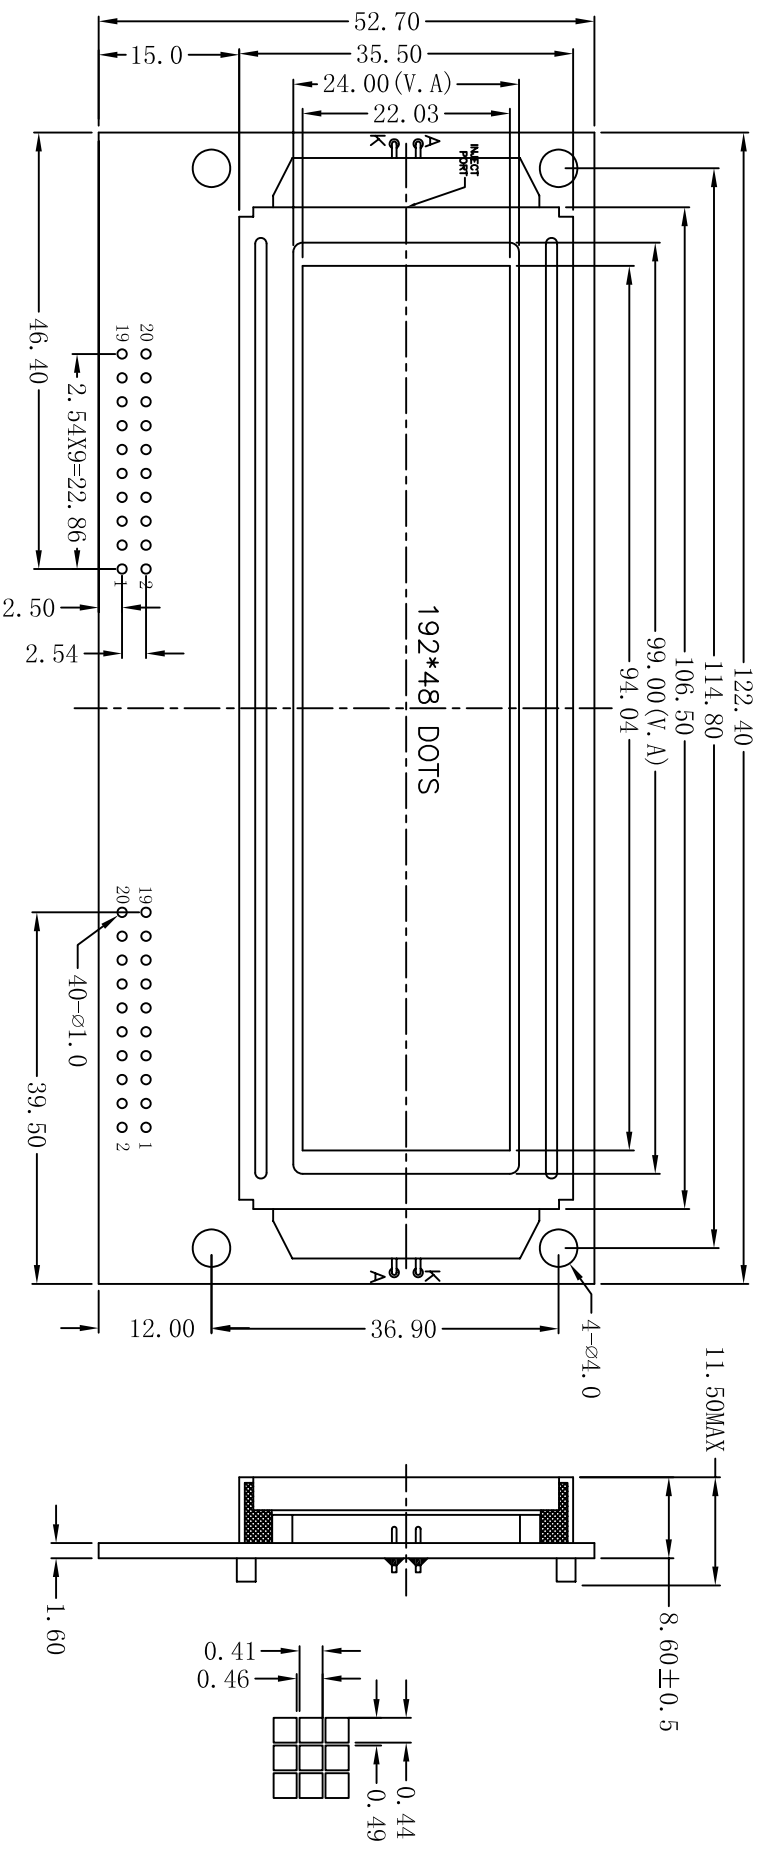

Specification:

- 1). Driving: Duty:1/48, Bias:1/8, VLCD:9.0V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Negative/Transmissive
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: S6B0108
- 6). Backlight: Side;White
- 7). Dimensions with mark "*" are important, with mark "()" are referenced

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	LEDA	LEDK	LED1	LED2	R/W	E



深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE: FTT 适应图面 比例
FAV-ABG192048A02-00			ABG192048A02-B1W	SHEET: 1 OF 1 页次
				GENERAL TOL: ±0.3 公差
				UNIT 单位 mm
				DATE 日期
				APPROVALS 签字
				CHK: DWN:

DO NOT SCALE THIS DRAWING.