


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	AUG-27-2007
B	Change IC	APR-09-2009

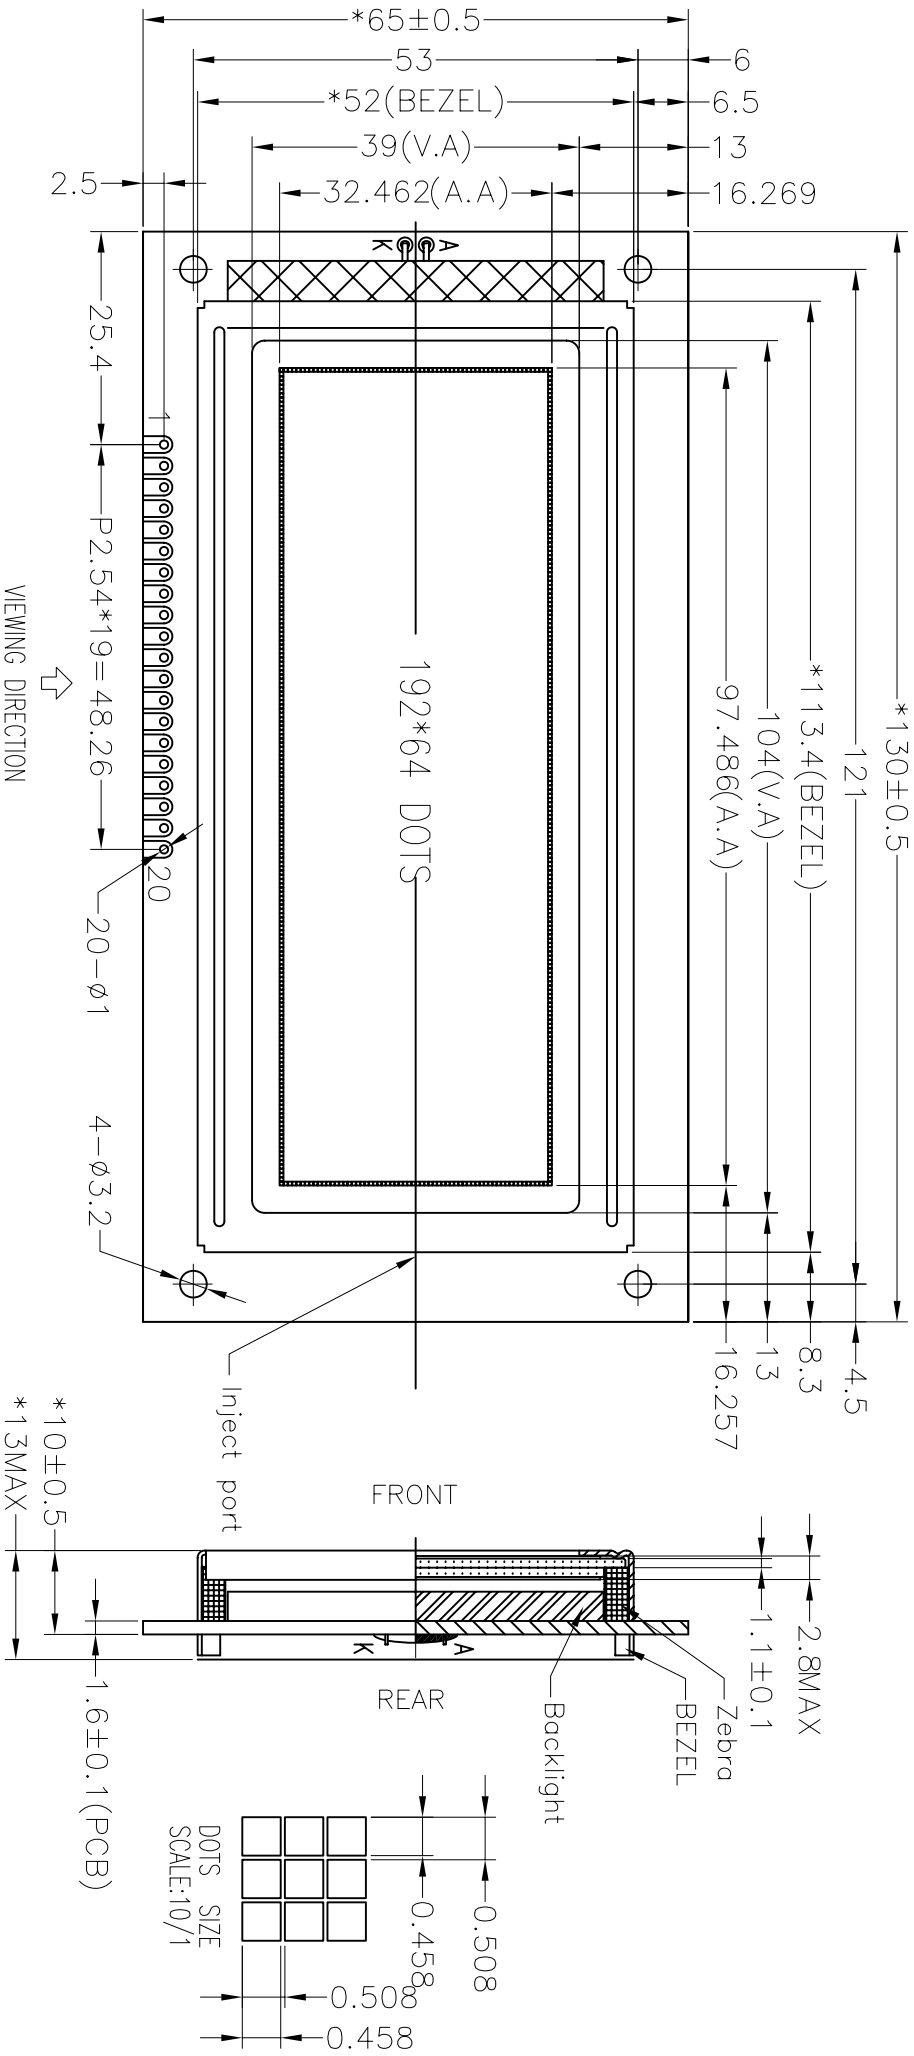

Specification:

- 1). Driving: Duty:1/64, Bias:1/9, VLCD:1.3.0V, VDD:5.0V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp.: -10°C~+60°C
- 5). Storage temp.: -20°C~+70°C
- 6). IC: SBN0064G/SBN6400G (or compatible)
- 7). Backlight: Edge White
- 8). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	LED+	VEE	CS3	CS2	RESET	CS1	DB7	DB6	DB5	DB4
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB3	DB2	DB1	DB0	E	R/W	RS	VO	VDD	VSS



PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	APPR: 签字	SCALE 比例	FTT 适应图面
CBG192064E21-BIW-R			CBG192064E21-BIW-R	CHK: 签字	1	OR 1
				DWN: 日期		