


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	Dec-07-2007

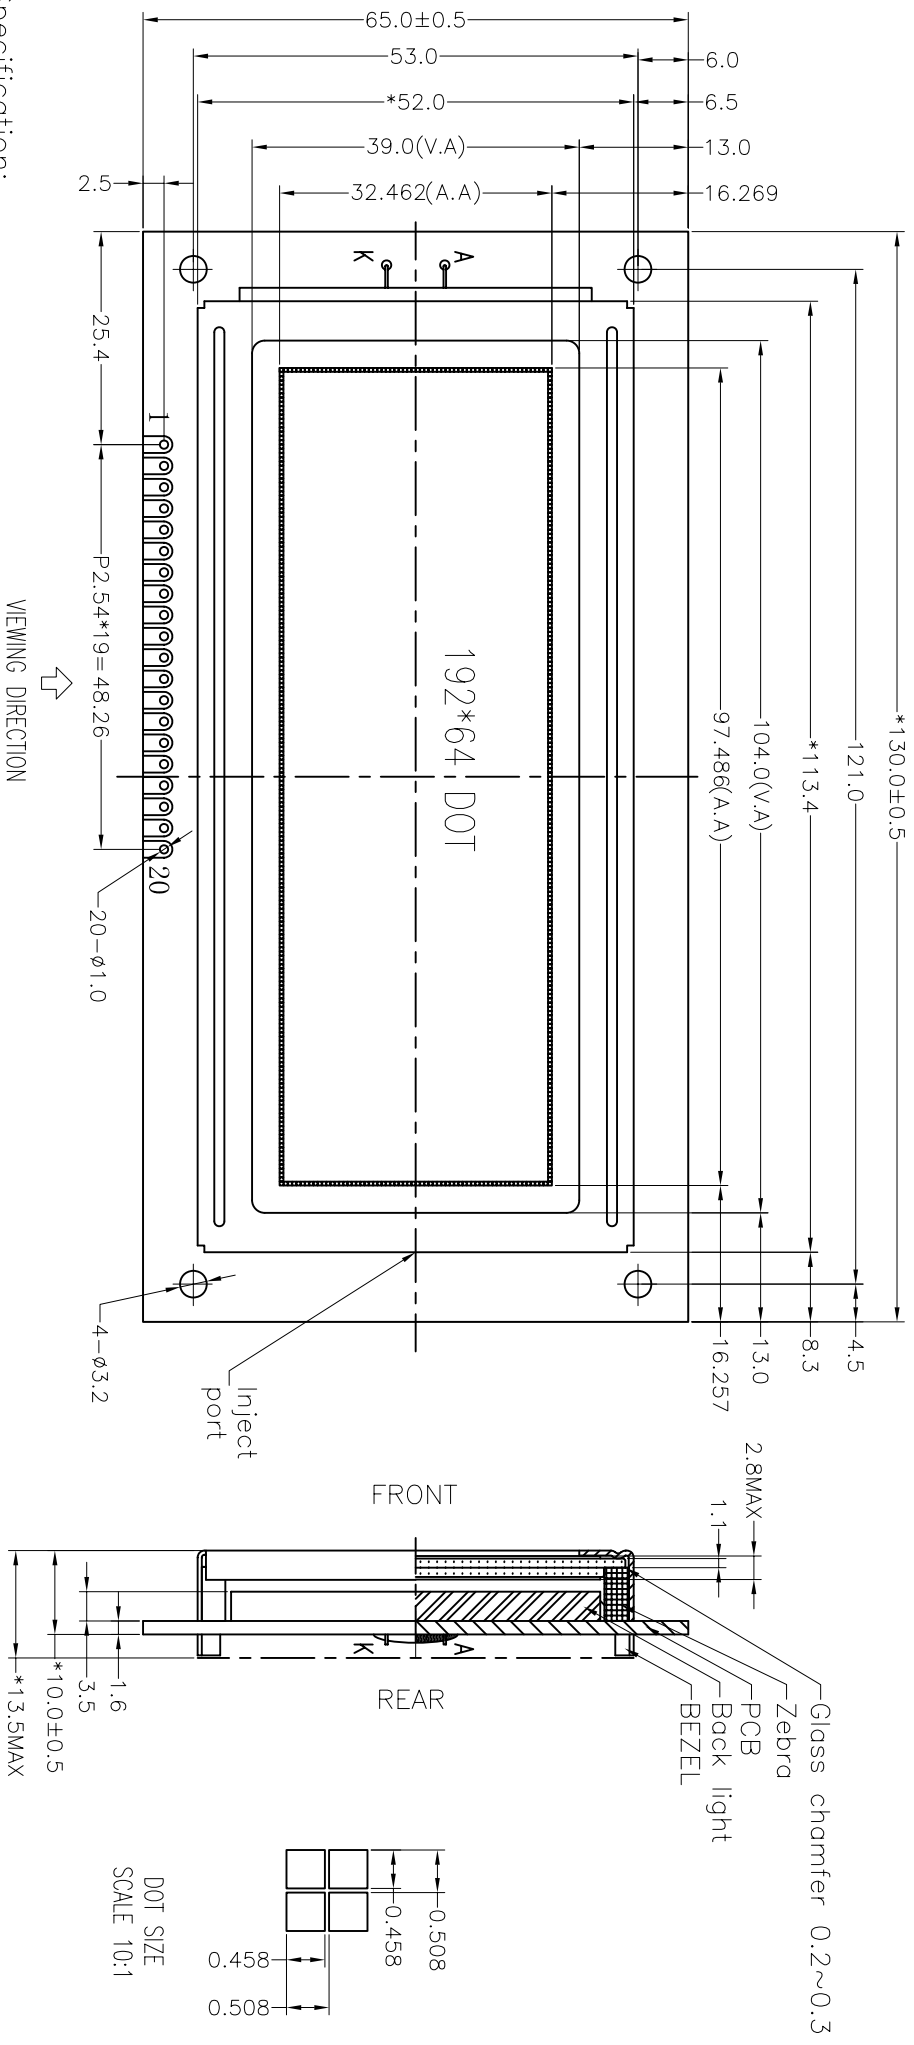


VIEWING DIRECTION

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	LED+	VEE	CS3	CS2	RESET	CS1	DB7	DB6	DB5	DB4
PIN	T1	T2	T3	T4	T5	T6	T7	T8	T9	T0
CONNECTION	DB3	DB2	DB1	DB0	E	R/W	RS	VO	VDD	VSS

DOT SIZE
SCALE 10:1

*10.0±0.5
1.6
3.5
*13.5MAX

- Specification:
- 1). Driving: Duty:1/64, Bias:1/9, VLCD:9.0V, VDD:5.0V
 - 2). Viewing Direction: 6 O'clock
 - 3). Display mode:FTN/Positive/Tranfective
 - 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
 - 5). IC: SBN0064(Or Compatible)
 - 6). Backlight: Side Blue
 - 7). Dimensions with mark "*" are important, with mark "()" are referenced
 - 8). All the raw materials are RoHS compliant.



深圳秋田电子有限公司
SHENZHEN AYO MICROELECTRONICS CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FIT 适应图面
ABG192064C04-FHB-R			ABG192064C04-FHB-R	SHEET: 1 OF 1	UNIT 单位 mm
				GENERAL TOL: ±0.3	DATE 日期
				APPROVALS 签字	
				APP: 洪俊斌	
				CHK: 魏芹英	
				DWN: 郑学东	

DO NOT SCALE THIS DRAWING.