

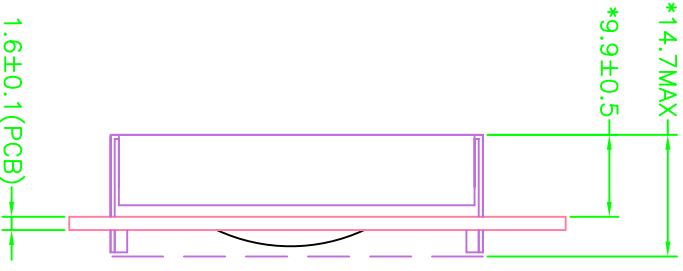


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	OCT-17-2007

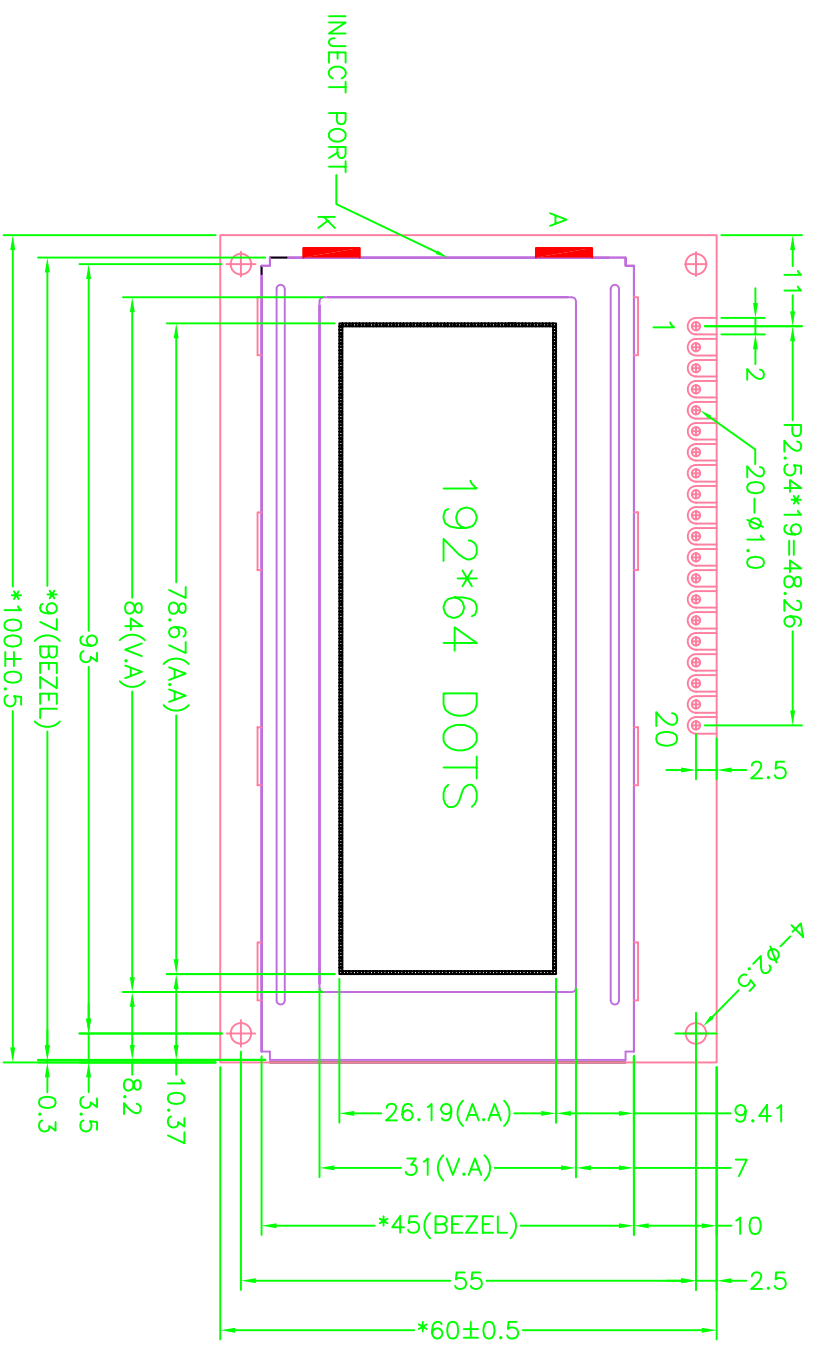


PIN NO	SYMBOL
1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E
10	R/W
11	RS
12	VO
13	VDD
14	VSS
15	CSB
16	CSA
17	VO/UT
18	/RST
19	LEDA
20	LEDK




Specification:

- 1). Driving: Duty: 1/64, Bias:1/9, VLCD:13.0V, VDD:5.0V
- 2). Viewing angle: 6 0'clock
- 3). Display mode: STN/Positive/Transflective/Y-G
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). Backlight: Bottom Y/G(Vf=4.05,If=180mA)
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

IC: SBN0064G



深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FIT 适应图面
ABG192064E05-YHY-R				SHEET: 1 OF 1	UNIT 单位 mm
GENERAL TOL: ±0.3			APPROVALS 签字	DATE 日期	
DO NOT SCALE THIS DRAWING.			APP: CHK: DWN:		