

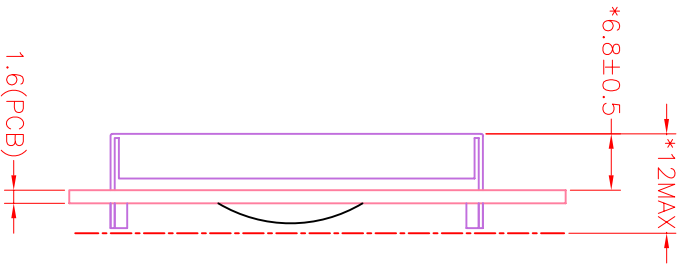


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	Apr-17-2007

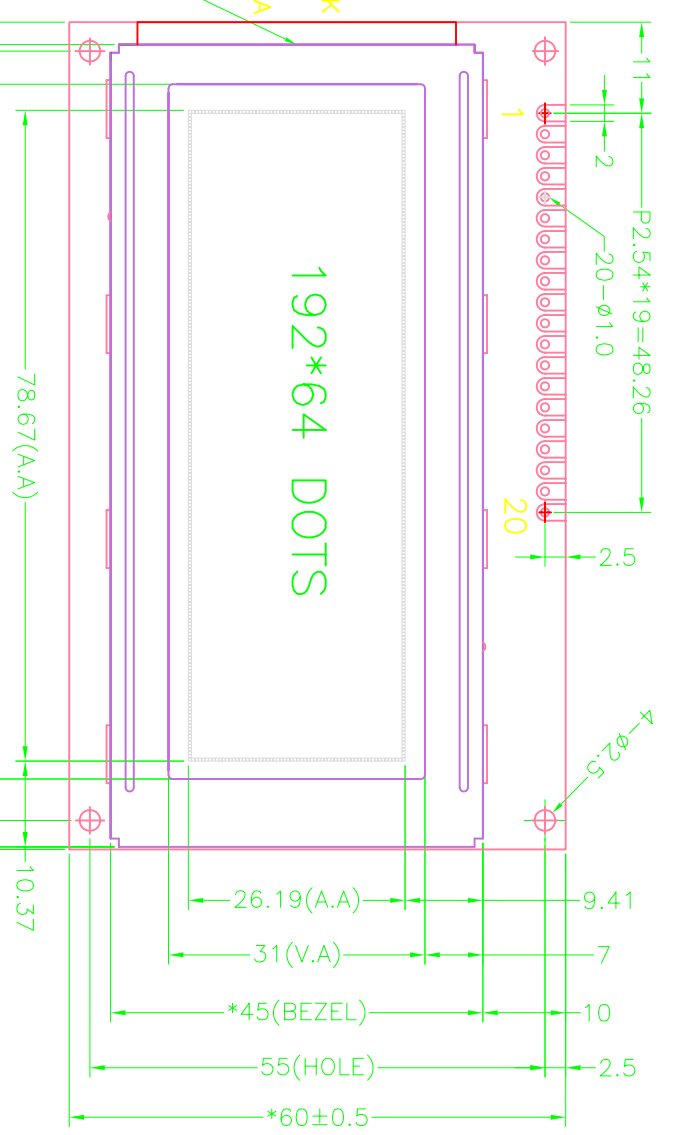

PIN NO	SYMBOL
1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E
10	R/W
11	RS
12	V0
13	VDD
14	VSS
15	CSB
16	GSA
17	VOUT
18	/RST
19	LEDA
20	LEDK

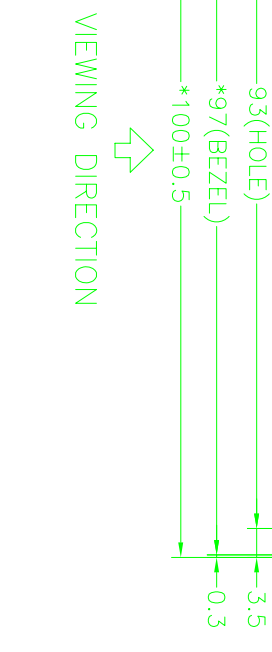

DOTS DETAIL  
SCALE:20/1

- Specification:
- 1). Driving: Duty: 1/64, Bias:1/9, VLCD:1.3.0V, VDD:5.0V
  - 2). Viewing angle: 6 0'clock
  - 3). Display mode: STN/Negative/Transmissive/BLUE
  - 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
  - 5). IC: S6B0108A01-COCX S6B0107B01-COCX
  - 6). Backlight: Edge White
  - 7). Dimensions with mark "\*" are important, with mark "()" are referenced
  - 8). All the raw materials are RoHS compliant

VIEWING DIRECTION



深圳秋田微电子有限公司  
SHENZHEN AI-DISPLAY CO., LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABG192064E02-BIW-R			ABG192064E02-BIW-R	SHEET: 1	OR 1
				GENERAL TOL: ±0.3	UNIT 单位 mm
				APPROVALS 签字	DATE 日期
				APP:	
				CHK:	
				DWN:	