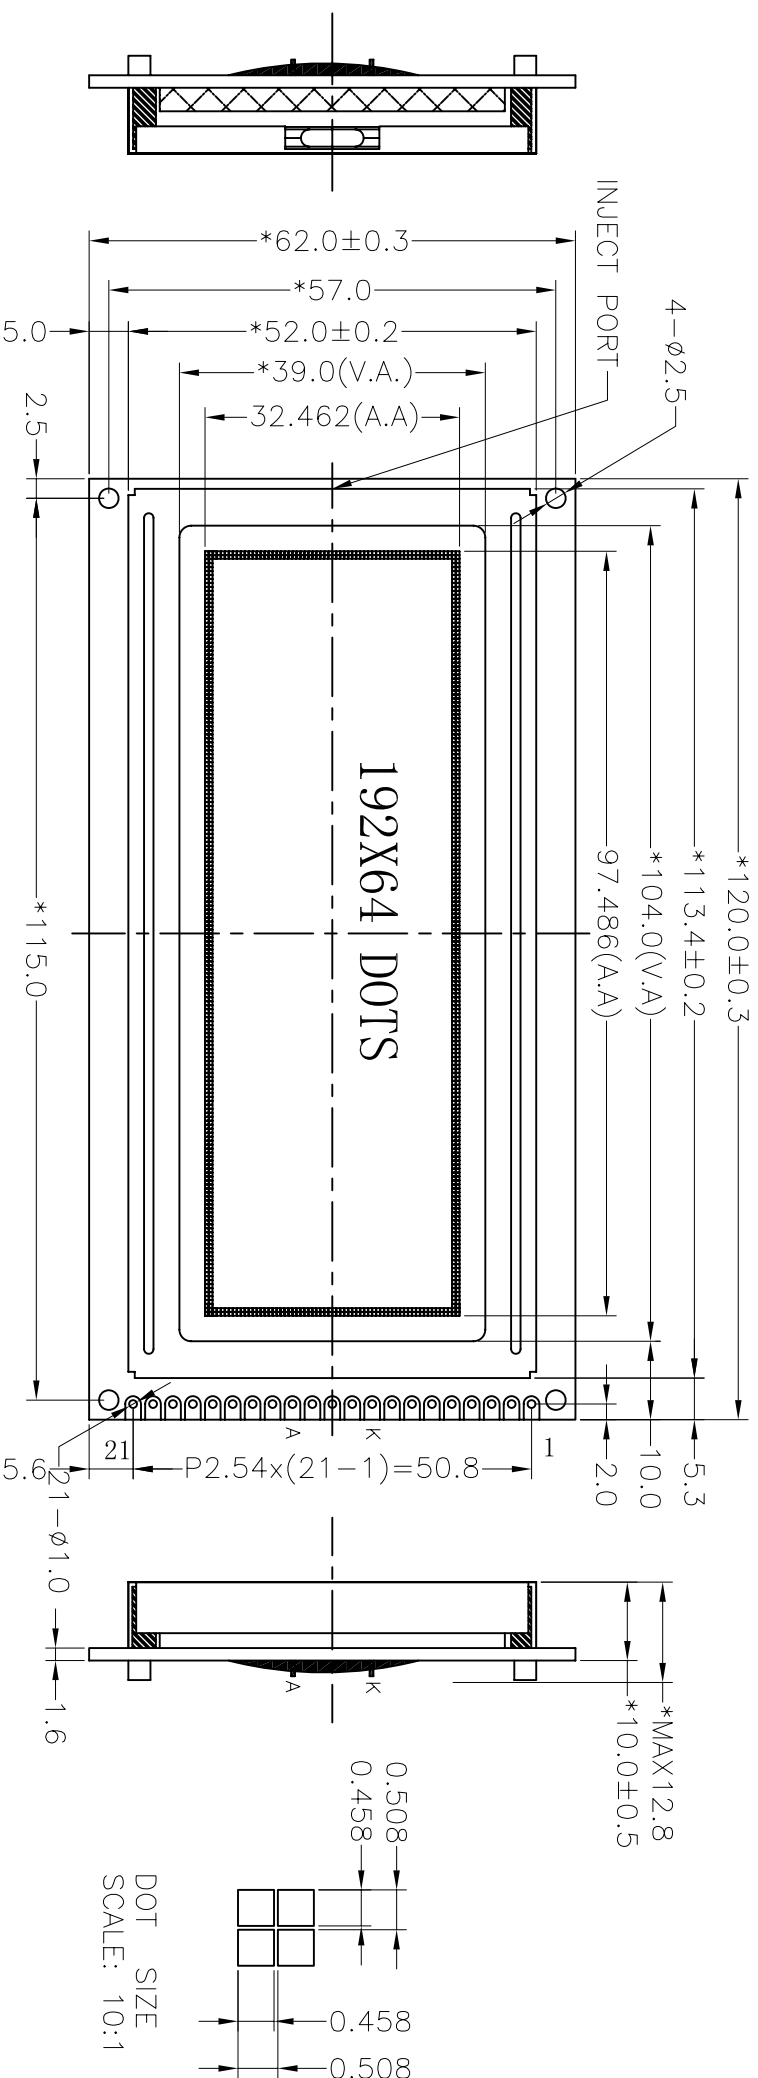


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	DEC-12-2005
A01	Meet for RoHS $\text{\textcircled{D}}$	MAR-20-2007


VIEWING DIRECTION


Specification:

- 1). Driving: Duty:1/64, Bias:1/9, VDD:5.0V, VLCD:10.5V
- 2). Viewing direction: 12 O'clock
- 3). Display mode: STN/Positive/Transflective/Y-G
- 4). Operating temp.: -10iãc~+55iãc
Storage temp.: -20iãc~+65iãc
- 5). IC: S6B0108
- 6). Backlight:Side, Yellow-green ,
- 7). Dimensions with mark "()" are important, with mark "()" are referenced
- 8). Meet for RoHS $\text{\textcircled{D}}$

PIN	1	2	3	4	5	6	7	8	9	10	11
CONNECTOR	VSS	VDD	VO	VEE	RS	R/W	E	DB0	DB1	DB2	DB3
PIN	12	13	14	15	16	17	18	19	20	21	
CONNECTOR	DB4	DB5	DB6	DB7	CS3	CS2	CS1	RES	LEDA	LEDK	



深圳秋田微电子有限公司
SHENZHEN AYO-DISPLAY CO.,LTD.

PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	APPROVALS 签字	UNIT 单位
ABG192064F00-YEY-R			ABG192064F00-YEY-R	APP: CHK: DWN:	DATE

SCALE: FIT 适应图面
 SHEET: 1 OF 1
 GENERAL TOL: ±0.3
 DO NOT SCALE THIS DRAWING.

1 2 3 4 5 6

A B C

1 2 3 4 5 6

A B C