


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	JAN-03-2007

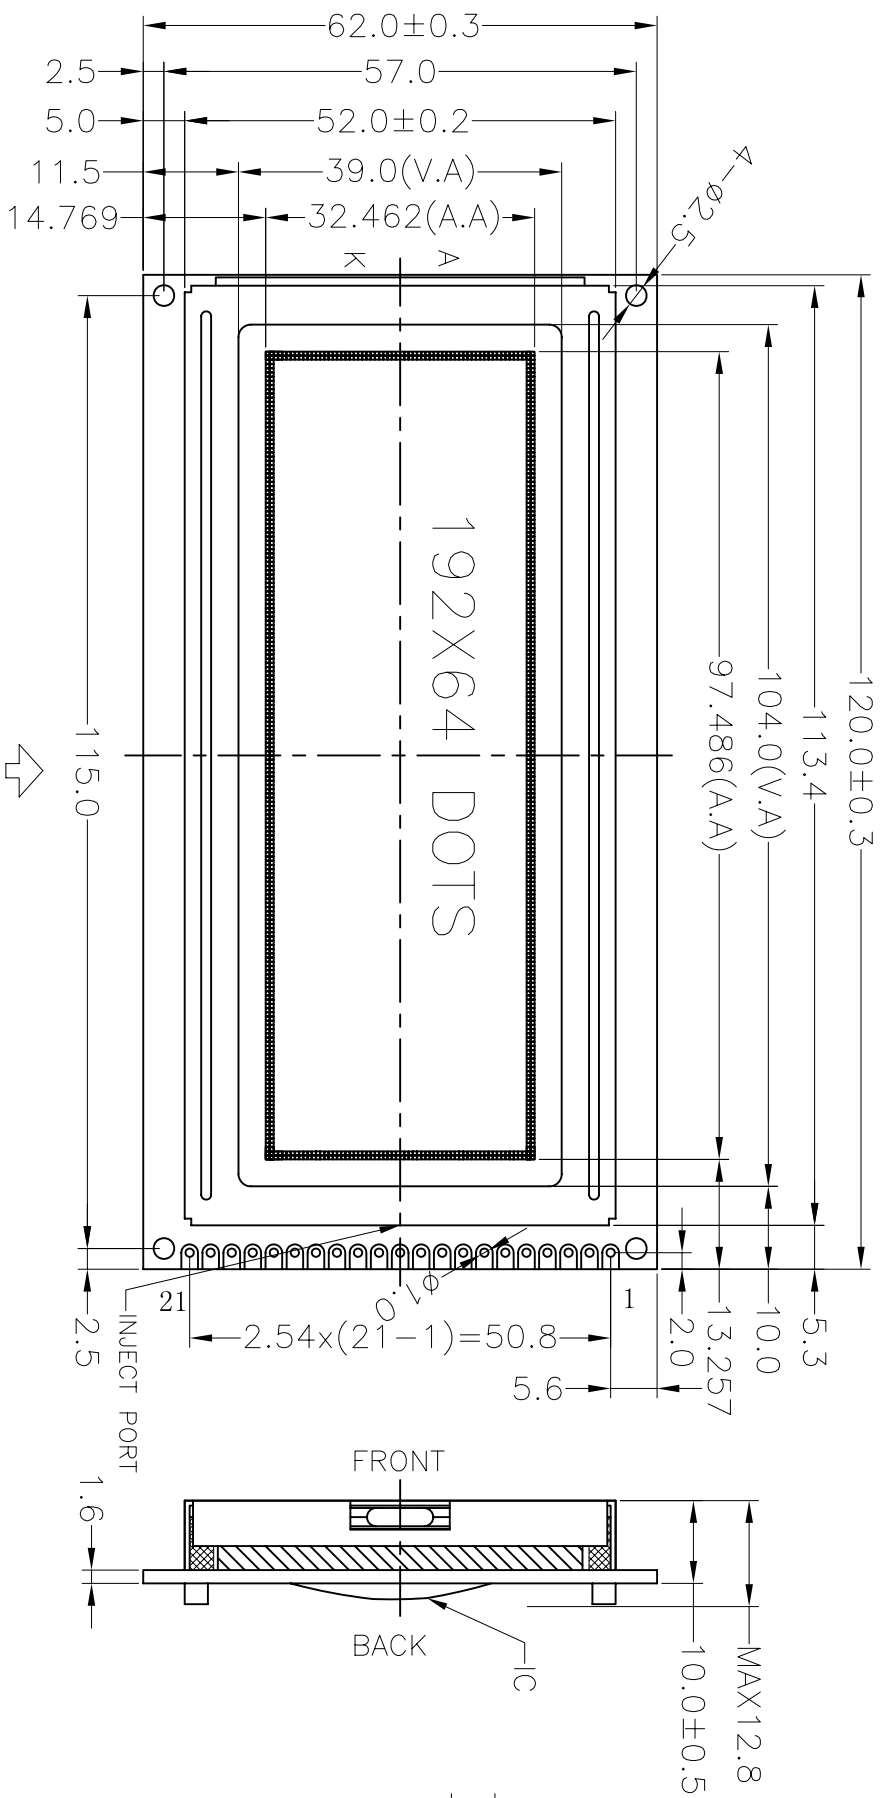


VIEWING DIRECTION

Specification:

- 1). Driving: Duty: 1/64, Bias:1/9, VLCD:9.0V(Ref.), VDD:5.0V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode: FSTN/Negative/Transmissive
- 4). Operating temp.: -20° c~+70° C
Storage temp.: -30° c~+80° C
- 5). IC: S6B0108
- 6). Backlight:Edge White
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). Meet for RoHS

PIN	1	2	3	4	5	6	7	8	9	10	11
CONNECTOR	VSS	VDD	VO	VEE	RS	R/W	E	DB0	DB1	DB2	DB3
PIN	12	13	14	15	16	17	18	19	20	21	
CONNECTOR	DB4	DB5	DB6	DB7	CS3	CS2	CS1	RES	LEDA	LEDK	



深圳市秋田视佳实业有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
FAV-ABG192064F03-R-00			ABG192064F03-A11V-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				APPROVALS 签字	
				CHK: 日期	
				DWN: 日期	

UNIT 单位: mm
DO NOT SCALE THIS DRAWING.