



1	2	3	4	5	6
C	Meet for RoHS	DEC-13-2006	REV 版本	DESCRIPTION 描述	DATE 日期
D	Add drive IC remark Δ	May-14-2008	A	First issue	Apr-30-2005
			B	Add hole of the LED/ARK	Oct-09-2006

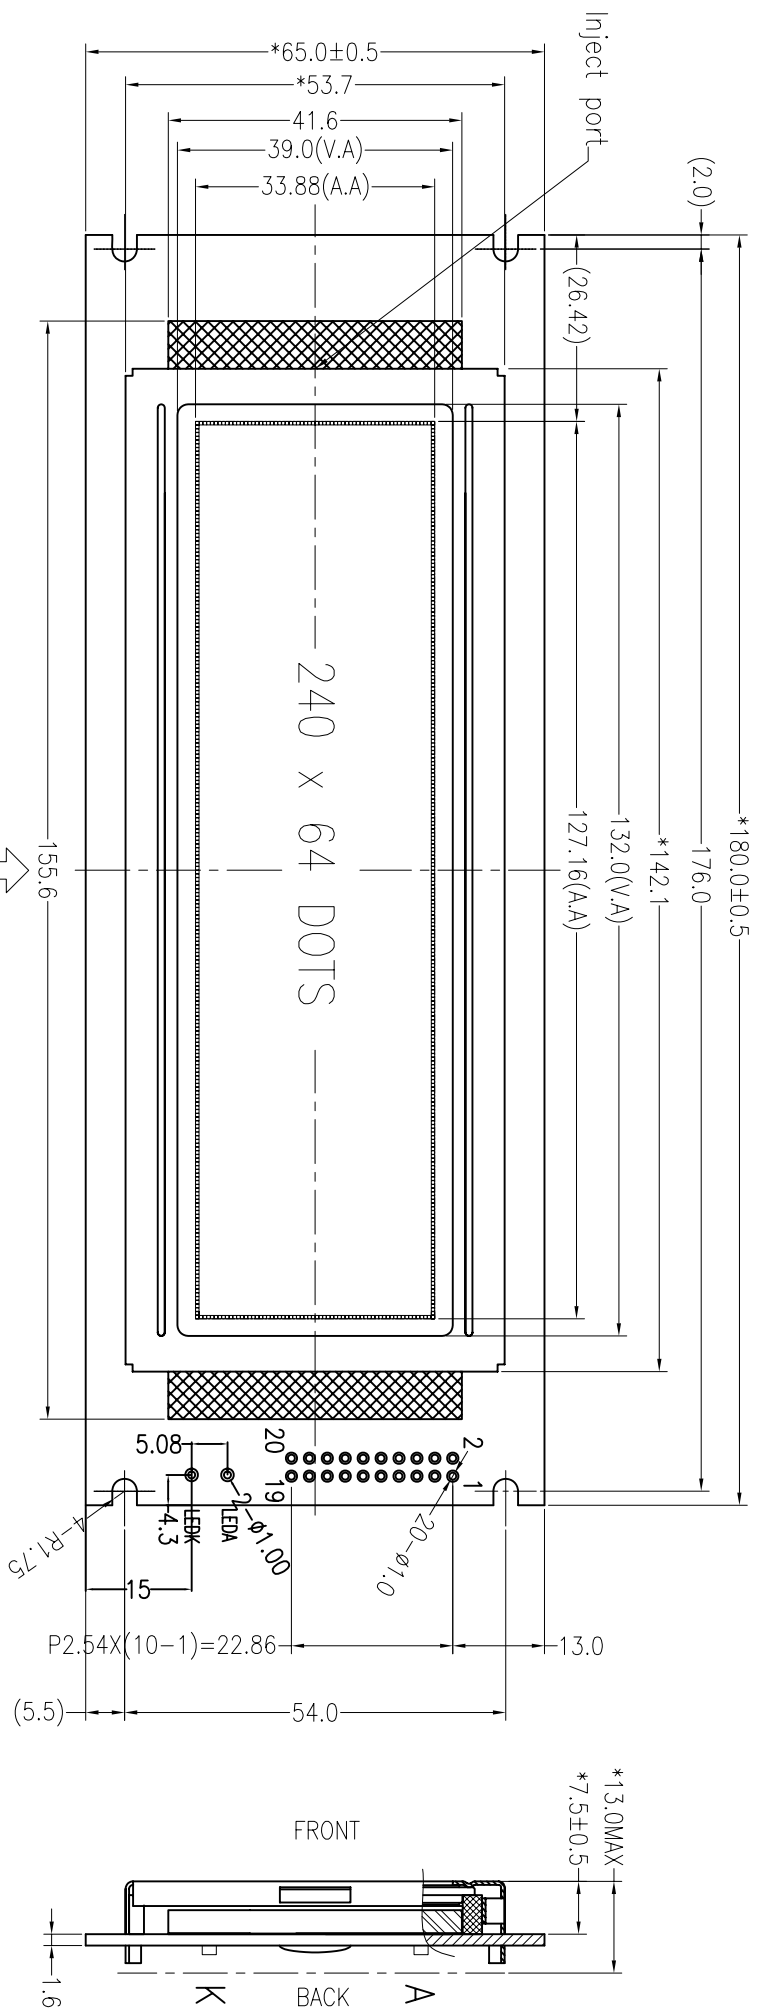

VIEWING DIRECTION \rightarrow




DOTS SIZE
SCALE 20:1



PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	FG	VSS	VDD	V0	/WR	/RD	/CE	C/D	NC	/RESET
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	NC

C Specification:

- 1). Driving: Duty:1/64,Bias:1/9 VLCD:12.0V(Ref), VDD:5.0V
- 2). Viewing angle: 6 0'clock
- 3). Display mode:STN/Negative/Transmissive/Blue
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Control IC: SAP1024,drive IC:SDN8080G-D(Or Compatible) Δ
- 6). Backlight: Side White
- 7). Dimensions with mark "*" are important, with mark "(") are referenced
- 8). All the raw materials are RoHS compliant



深圳秋田电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	SCALE 比例	FTT 适应图面
CBG240064A01-B1W-R			CHG240064A01-B1W-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				APPROVALS 签字	DATE 日期
				CHK: 日期	
				DWN: 日期	

DO NOT SCALE THIS DRAWING.