
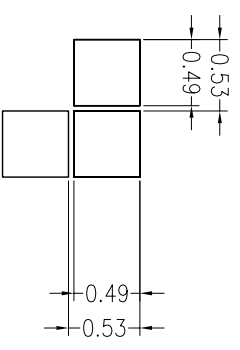


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	DEC-23-2004
A01	RoHS and Add hole of the LEDA/K	APR-16-2007

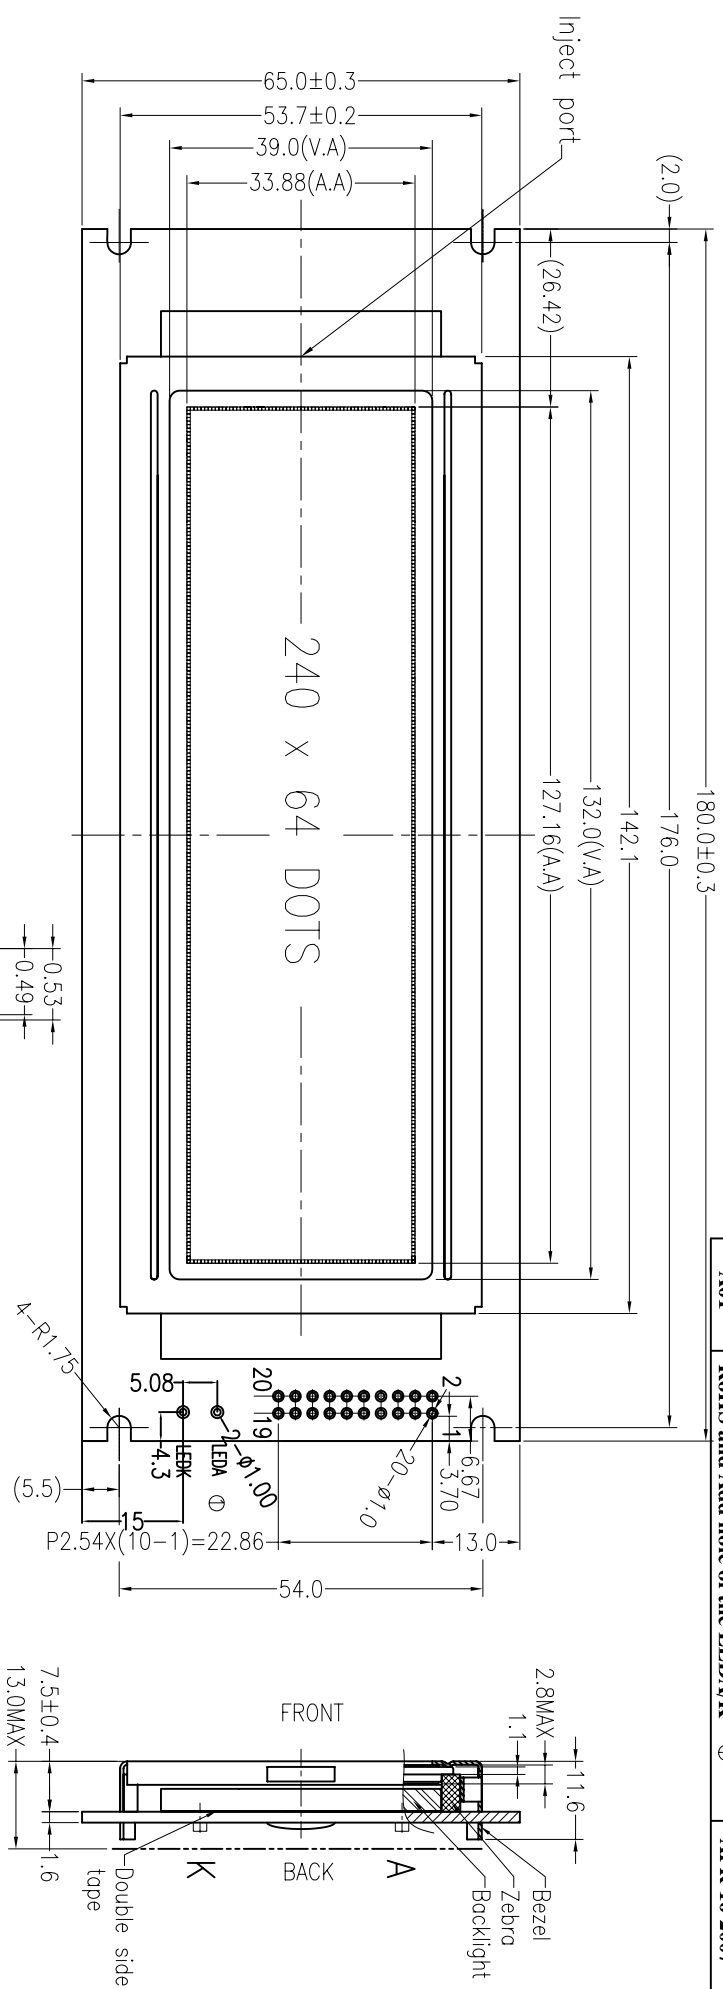

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	FG	VSS	VDD	VO	/WR	/RD	/CE	C/D	NC	/RESET
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	NC

- Specification:
- 1). Driving: Duty:1/64,Bias:1/9 VLCD:12.0V, VDD:5.0V
 - 2). Viewing angle: 6 0'clock
 - 3). Display mode:STN/Positive/Transflective/YG
 - 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
 - 5). IC: SAP1024B
 - 6). Backlight: Side Yellow-Green
 - 7). Dimensions with mark "*" are important, with mark "()" are referenced
 - 8). Meet for ROHS

深圳市秋田视佳实业有限公司
SHENZHEN A.V-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FIG 适应图面
FAV-CBG240064A00-R-01			CHG240064A00-1HY-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				APPR: 签字	
				CHK: 签字	
				DWN: 签字	
				UNIT 单位	mm
				DATE 日期	

DO NOT SCALE THIS DRAWING.