



| REV 版本 | DESCRIPTION 描述 | DATE 日期 |
|--------|---------------------------------|-------------|
| A00 | First issue | NOV-11-2006 |
| A01 | Change dimensions \varnothing | DEC-23-2006 |

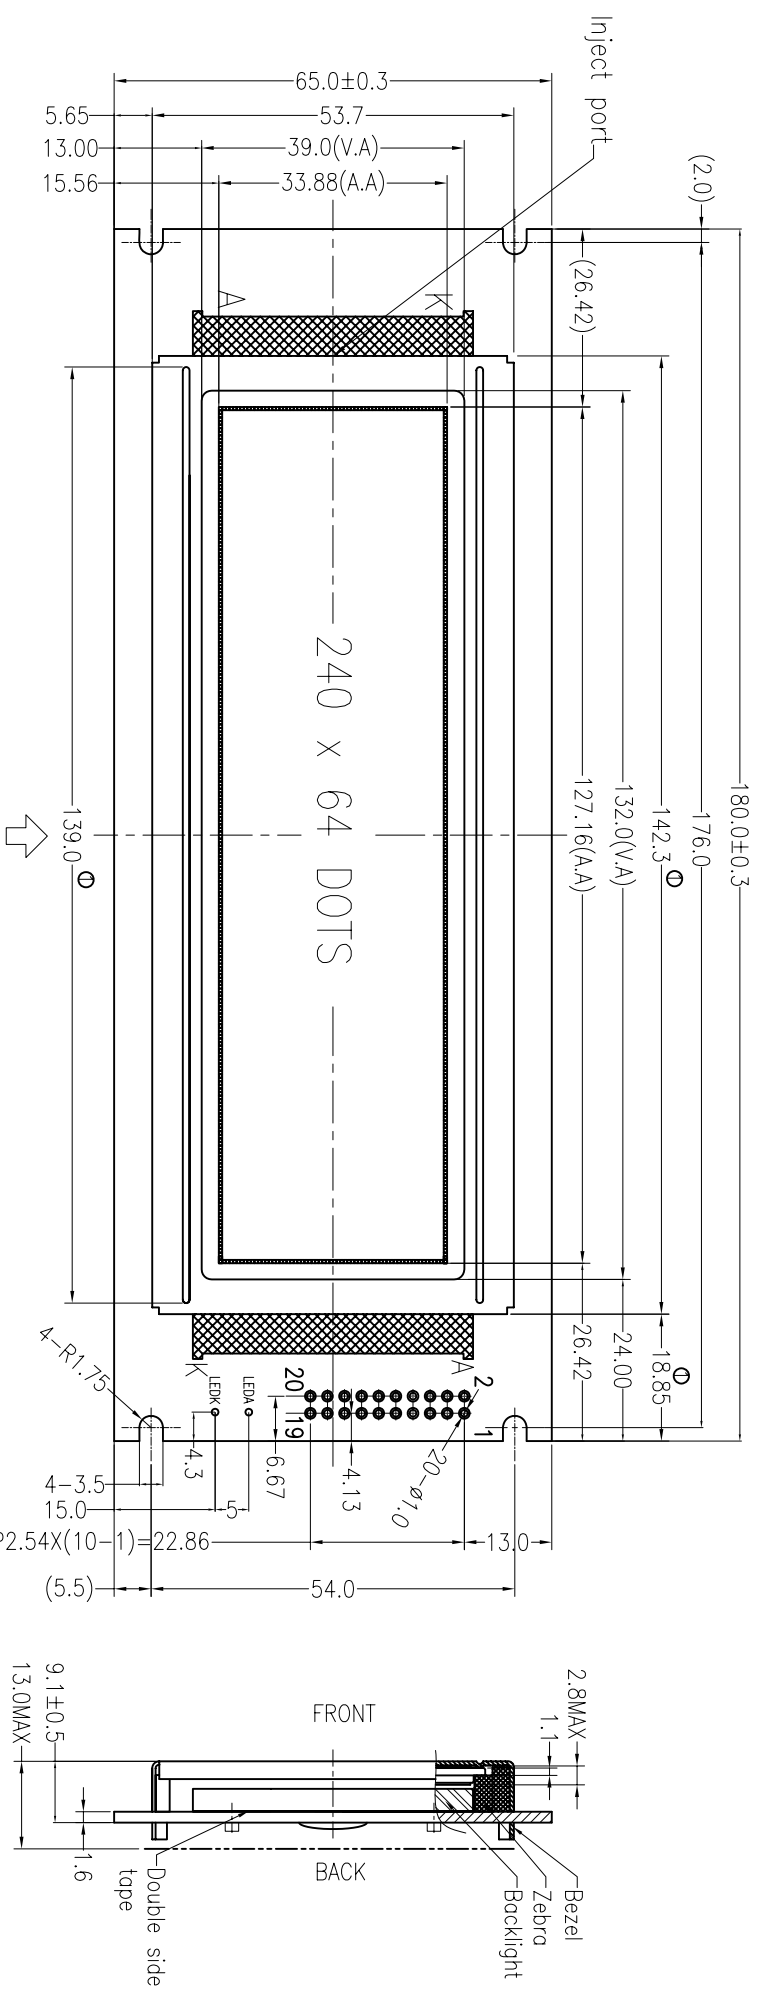

Specification:

- 1). Driving: Duty:1/64,Bias:1/9 VLCD:12.0V(Ref), VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: FSTN/Positive/Transflective/Grey
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: SAP1024B
- 6). Backlight: Edge White
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). Meet for RoHS

VIEWING DIRECTION



DOTS SIZE
SCALE 20:1

| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|------------|-----|-----|-----|-----|-----|-----|-----|-----|----|--------|
| CONNECTION | FG | VSS | VDD | V0 | /MR | /RD | /CE | C/D | NC | /RESET |
| PIN | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| CONNECTION | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | FS | NC |

FAV 深圳市秋田视佳实业有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

| | | | | | |
|-----------------------|--------|-------------------|----------------------|--------------------|------------|
| PART NO: 零件编号 | C/D结构图 | PROJECTION 三角法 | MODEL NUMBER 模组型号 | SCALE 比例 | FIG 适应图面 |
| FAV-CBG240064A06-R-01 | | | CBG240064A06-FHW-R | SHEET: 页次 | 1 OF 1 |
| | | | | GENERAL TOL: 公差 | ±0.3 |
| | | | | APPROVALS 签字 | DATE 日期 |
| | | | | CHK: 日期 | |
| | | | | DWN: 日期 | |

DO NOT SCALE THIS DRAWING.