



REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	NOV-29-2006
A01	Change the pin's sign ①	DEC-05-2006

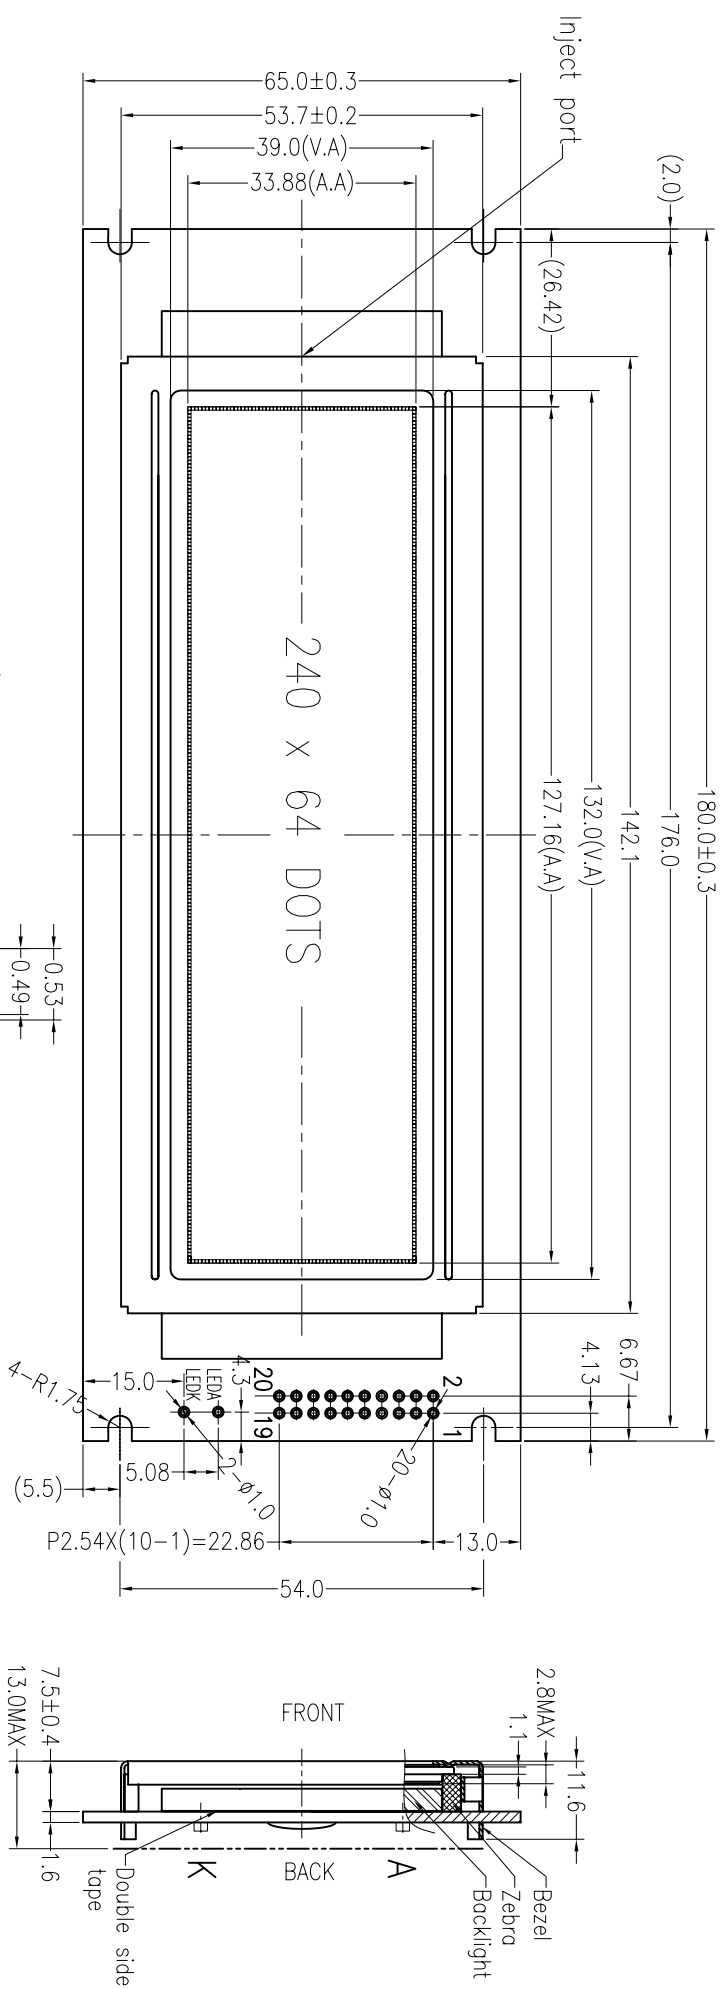

Specification:


- 1). Driving: Duty:1/64, Bias:1/9, VLCD:12.0V(Ref.), VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode:STN/Positive/Transflective/YG
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). IC: T6963(Or Equivalent)
- 6). Backlight: Side White
- 7). Dimensions with mark "\*" are important, with mark "()" are referenced
- 8). Meet for RoHS

VIEWING DIRECTION




DOTS SIZE  
SCALE 20:1

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	FG	VSS	VDD	NC①	/WR	/RD	/CE	C/D	NC	/RESET
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	VEE ①



**深圳市秋田视佳实业有限公司**  
SHENZHEN A.V.DISPLAY CO.,LTD.

PART NO: 零件编号	CD结构	PROJECTION 三角法	MODEL NUMBER 模组型号	UNIT 单位
FAV-CBG240064A13-R-01			CRG240064A13-V1W-R	mm
SCALE 比例			FIT 适应图面	
SHEET: 1 OF 1		GENERAL TOL: ±0.3		DATE 日期
APP:	CHK:	DWN:		