



REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	May-12-2008

VIEWING DIRECTION

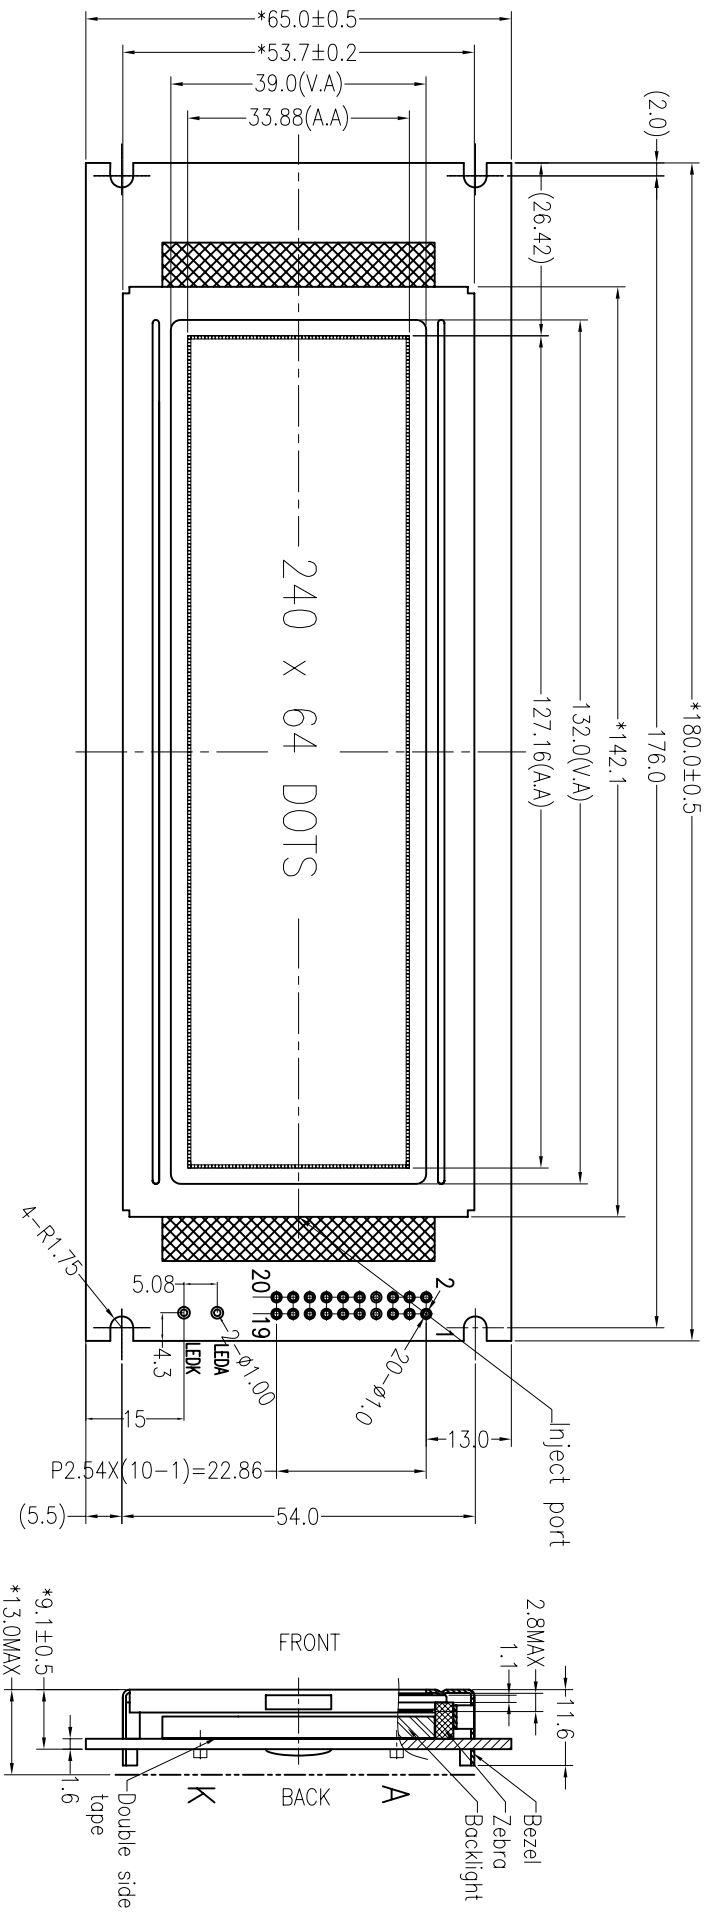

Specification:

- 1). Driving: Duty:1/64,Bias:1/9 VLCD:12.0V, VDD:5.0V
- 2). Viewing angle: 12 O'clock
- 3). Display mode:STN/Negative/Transmissive/Blue
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: SAP1024 (or compatible)
- 6). Backlight: Side White
- 7). Dimensions with mark "*" are important, with mark "(")" are referenced
- 8). All the raw materials are RoHS compliant.



DOTS SIZE
SCALE 20:1

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	FG	VSS	VDD	V0	/WR	/RD	/CE	C/D	NC	/RESET
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	NC

深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	SCALE 比例	FIT 适应图面
CBG240064A22-BLW-R			CBG240064A22-BLW-R	SHEET: 页次	1 OF 1
				GENERAL TOL: ±0.3	
				APPROVALS 签字	DATE 日期
				CHK: DWN:	

DO NOT SCALE THIS DRAWING.