



REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	Nov-24-2005
A01	Modify the location of the AK	Jan-18-2006

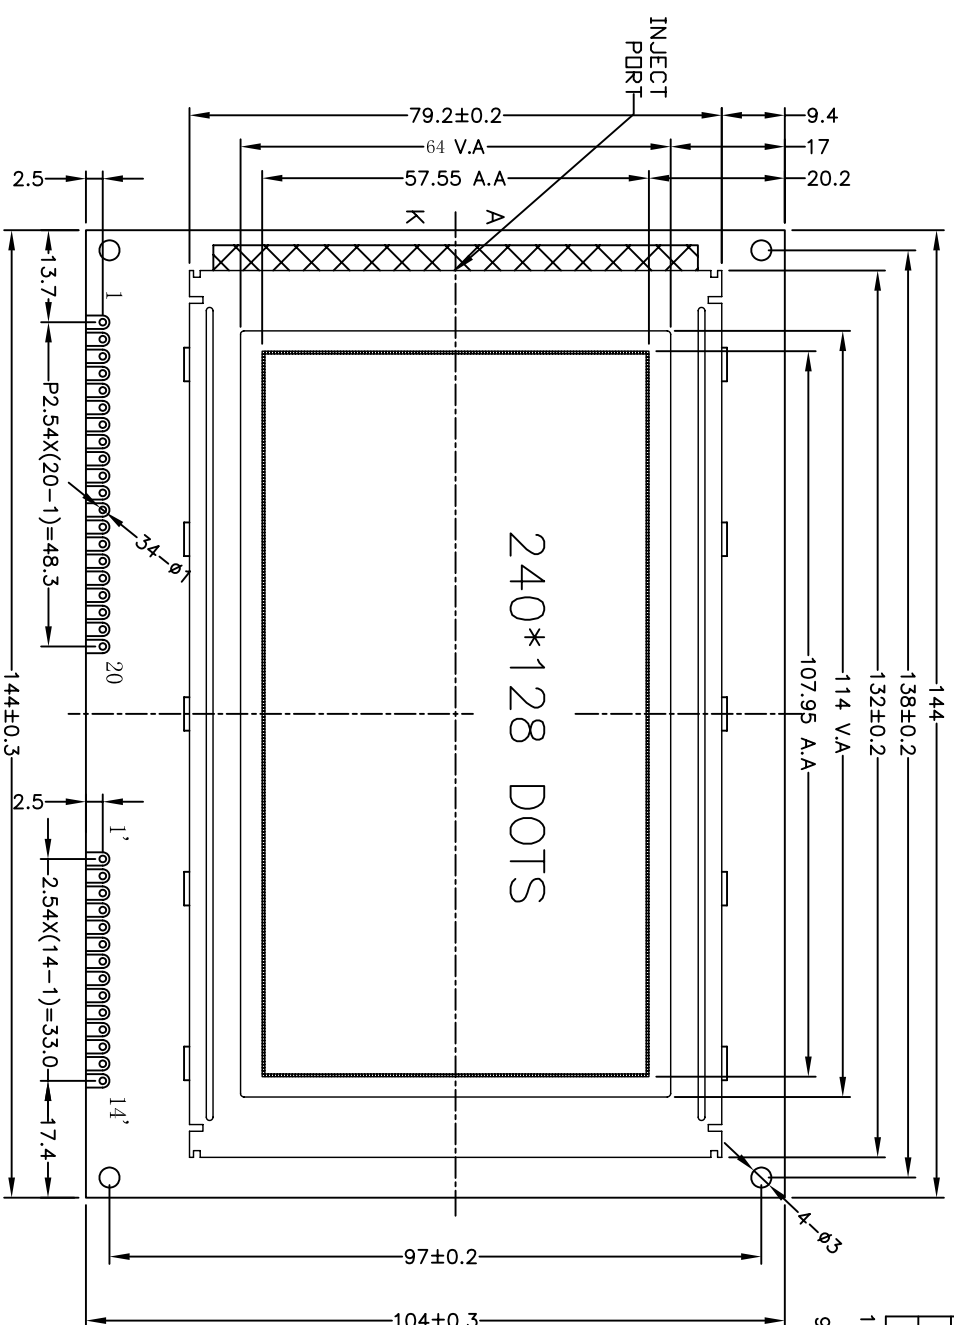

DOT SIZE
SCALE 10:1

PIN	1'	2'	3'	4'	5'	6'	7'
CONNECTION	FRM	CL2	CL1	M	VDD	VSS	VEE
PIN	8'	9'	10'	11'	12'	13'	14'
CONNECTION	DB0	DB1	DB2	DB3	V0	LEDA	LEDK

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	V0	C/D	RD	WR	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	CE	RST	VEE	FS	LEDA	LEDK

Specification:

- 1). Driving: Duty:1/128, Bias:1/12, VLCD:14.5V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp.: -10iãc~+55iãC
- 5). Storage temp.: -20iãc~+65iãC
- 6). Backlight: Side, White (5 PCS)
- 7). Dimensions with mark "*" are important, with mark "()" are referenced

<p>深圳秋田微电子有限公司 SHENZHEN AV-DISPLAY CO.,LTD.</p>		SCALE: FIT 适应图面	
		SHEET: 1 OF 1	
PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
ABG240128C02-B1W		APPROVALS 签字	
		DATE	
		DW.N:	