
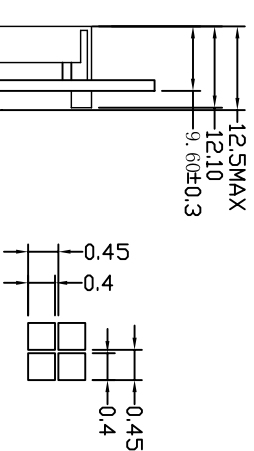


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	APR-18-2004

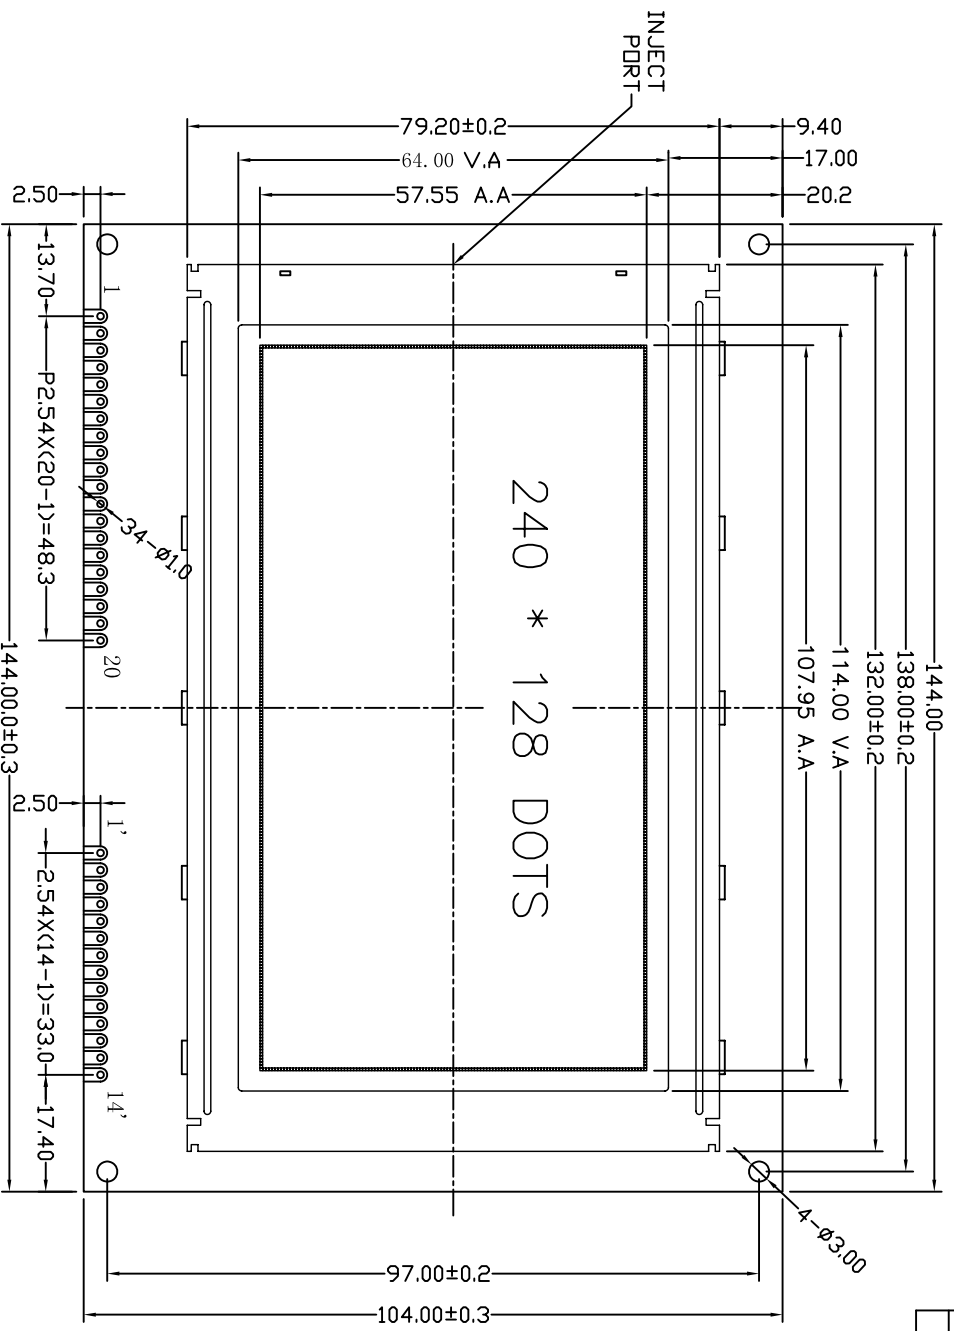

DOT SIZE
SCALE 10:1

PIN	1'	2'	3'	4'	5'	6'	7'
CONNECTION	FRM	CL2	CL1	M	VDD	VSS	VEE
PIN	8'	9'	10'	11'	12'	13'	14'
CONNECTION	DB0	DB1	DB2	DB3	V0	LEDA	LEDK

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	V0	C/D	RD	WR	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	CE	RST	VEE	FS	LEDA	LEDK

Specification:

- 1). Driving: Duty:1/128, Bias:1/12, VLCD:14.5V, VDD:5.0V
 - 2). Viewing angle: 6 O'clock
 - 3). Display mode: FSTN/Positive/Transflective/Grey
 - 4). Operating temp.: -10°C~+55°C
 - 5). Storage temp.: -20°C~+65°C
 - 6). IC: KS0086 & T6963C
 - 7). Backlight: Side, White, 5 Leds
- Dimensions with mark "*" are important, with mark "(") are referenced



深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

SCALE: FTI 适应图面
比例

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	APPROVALS 签字	UNIT 单位
ABG240128C00-FHW			ABG240128C00-FHW	CHK: DWN:	mm
GENERAL TOL: ±0.3			DATE		
DO NOT SCALE THIS DRAWING.					