



REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	JUL-20-2007

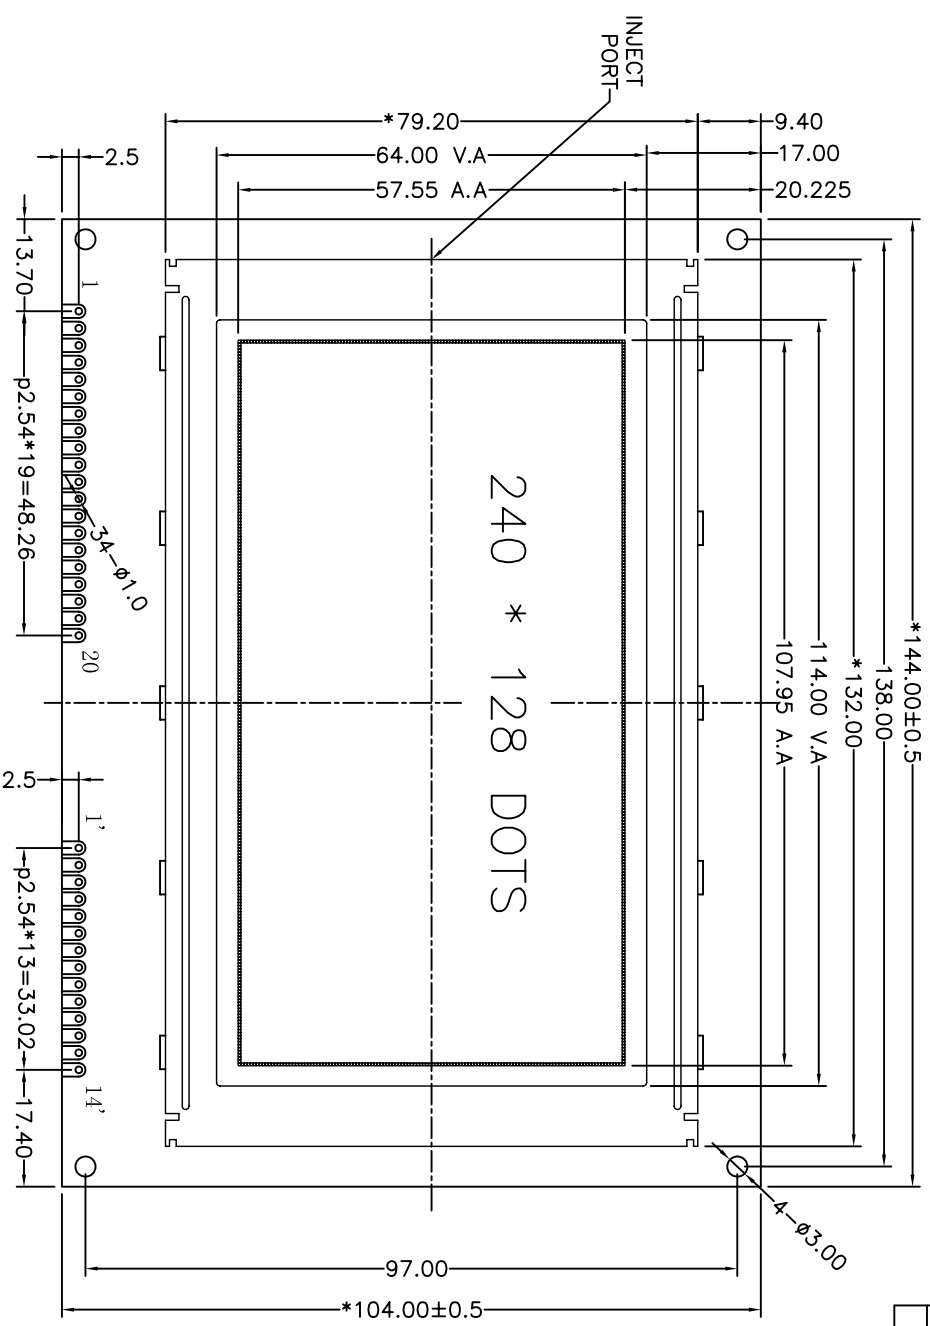

DOT SIZE
SCALE 10:1


PIN	1'	2'	3'	4'	5'	6'	7'
CONNECTION	FRM	CL2	CL1	M	VDD	VSS	VEE
PIN	8'	9'	10'	11'	12'	13'	14'
CONNECTION	DB0	DB1	DB2	DB3	V0	LEDA	LEDK

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	V0	C/D	RD	WR	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	CE	RST	VEE	FS	LEDA	LEDK

VIEWING DIRECTION

Specification:

- 1). Driving: Duty:1/128, Bias:1/12, VLCD:1.4.5V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: FSTN/Positive/Reflective/Grey
- 4). Operating temp.: 0°C~+50°C
- 5). Storage temp.: -10°C~+60°C
- 6). IC:T6963C
- 7). Backlight: None
- 8). All the raw materials are RoHS compliant.



深圳市秋田视佳实业有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	APPROVALS 签字	DATE 日期
FAV-ABG240128C04-R-00			ABG240128C00-PIN-A	APP: CHK:	DWN:

SCALE: FIT 适应图面
SHEET: 1 OF 1
GENERAL TOL: ±0.3
UNIT 单位: mm