
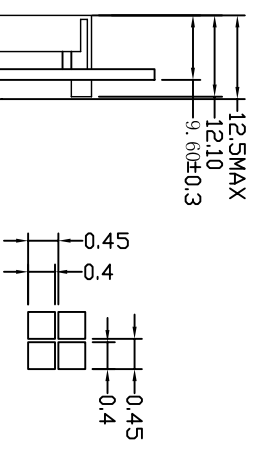


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	MAY-05-2005

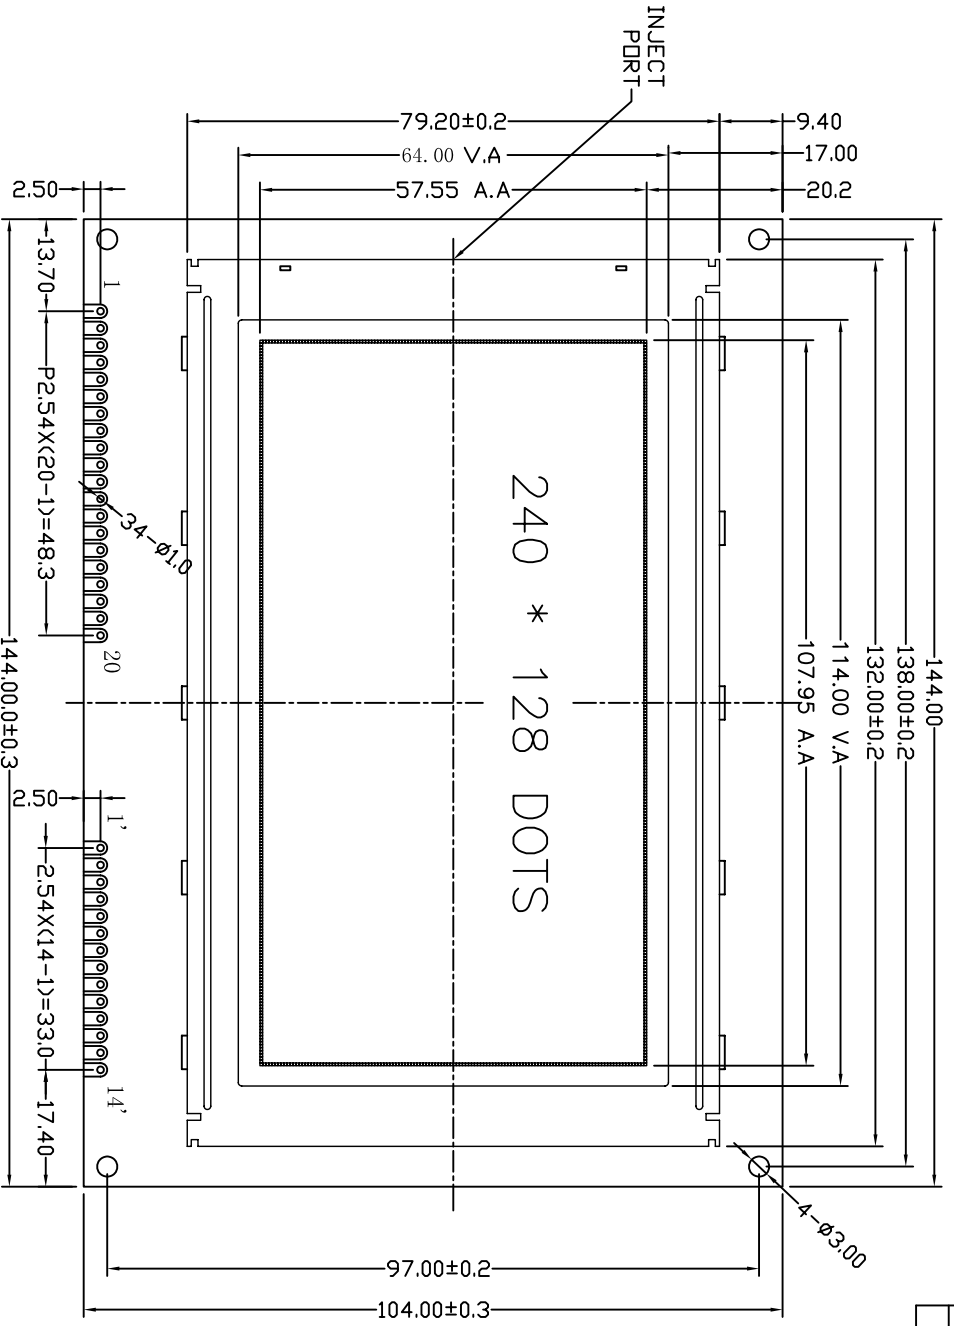

DOT SIZE
SCALE 10:1

PIN	1'	2'	3'	4'	5'	6'	7'
CONNECTION	FRM	CL2	CL1	M	VDD	VSS	VEE
PIN	8'	9'	10'	11'	12'	13'	14'
CONNECTION	DB0	DB1	DB2	DB3	V0	LEDA	LEDK

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	V0	C/D	RD	WR	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	CE	RST	VEE	FS	LEDA	LEDK

Specification:

- 1). Driving: Duty:1/128, Bias:1/12, VLCD:14.5V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Positive/Transflective/Grey
- 4). Operating temp.: -10°C~+55°C
Storage temp.: -20°C~+65°C
- 5). IC: KS0086 & T6963C
- 6). Backlight: Side, White, 5 Leds
- 7). Dimensions with mark "*" are important, with mark "(" are referenced

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO:	C/D	PROTECTION	MODEL NUMBER
零件编号	结构图	三角法	模组型号
FAV-ABG240128C01-00			ABG240128C01-GHW
SCALE: FTI 适应图面		SHEET: 1 OF 1	
GENERAL TOL: ±0.3		UNIT: mm	
APPROVALS		DATE	
CHK:	DWN:	APP:	DATE