
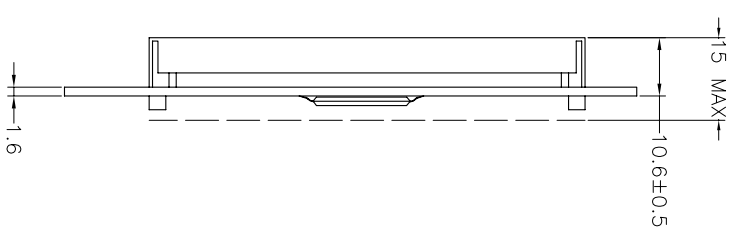


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	NOV-24-2006

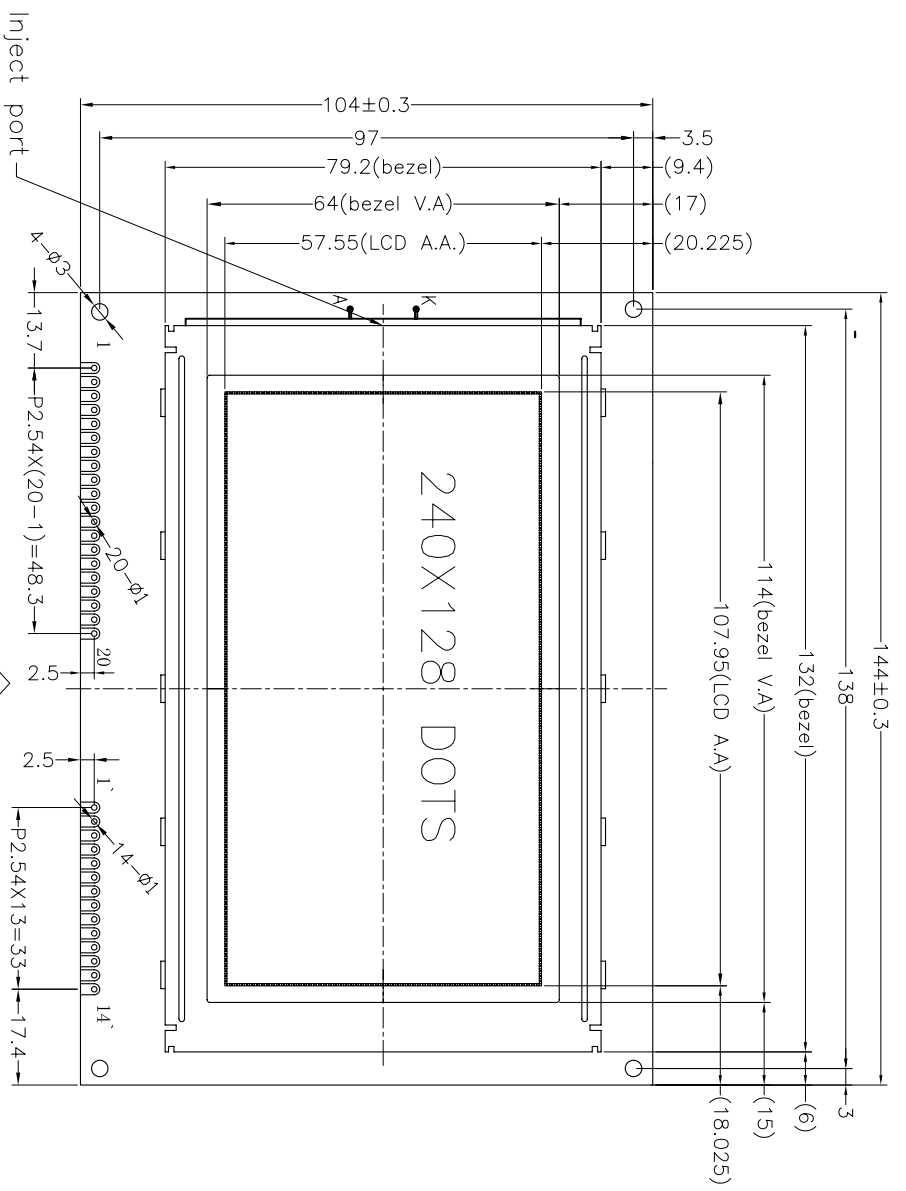



PIN NO	SYMBOL
1'	FLM
2'	CL2
3'	CL1
4'	M
5'	VDD
6'	VSS
7'	VEE
8'	DB0
9'	DB1
10'	DB2
11'	DB3
12'	V0
13'	LEDA
14'	LEDK

PIN NO	SYMBOL
1	VSS
2	VDD
3	V0
4	C/D
5	/RD
6	/WR
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CE
16	/RST
17	VEE
18	FS
19	LEDA
20	LEDK


Specification:

- 1). Driving: Duty:1/128, Bias:1/12, VLCD:14.5V(Ref.), VDD:5.0V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:FTN/Positive/Transflective
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: SAP1024B(Or EQU)
- 6). Backlight: Side White
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compicant





深圳市秋田视佳实业有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	CD	PROJECTION 三角法	MODEL NUMBER 模组型号	
FAV-ABG240128YM05-R-00			ABG240128YM05-RTM-R	
SCALE: FIT 适应图面				UNIT 单位
SHEET: 1 OF 1				mm
GENERAL TOL: ±0.3				DATE
APP:	APPROVALS	签字	日期	
CHK:	DWN:			

DO NOT SCALE THIS DRAWING.