
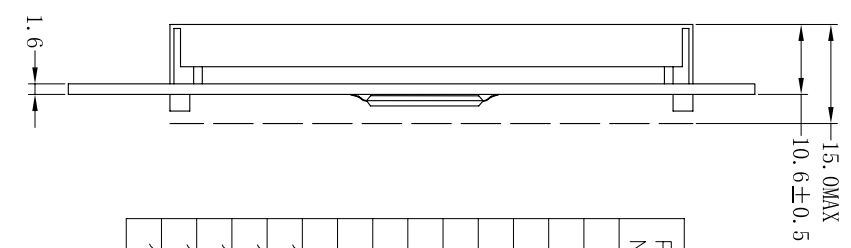


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	DEC-23-2004

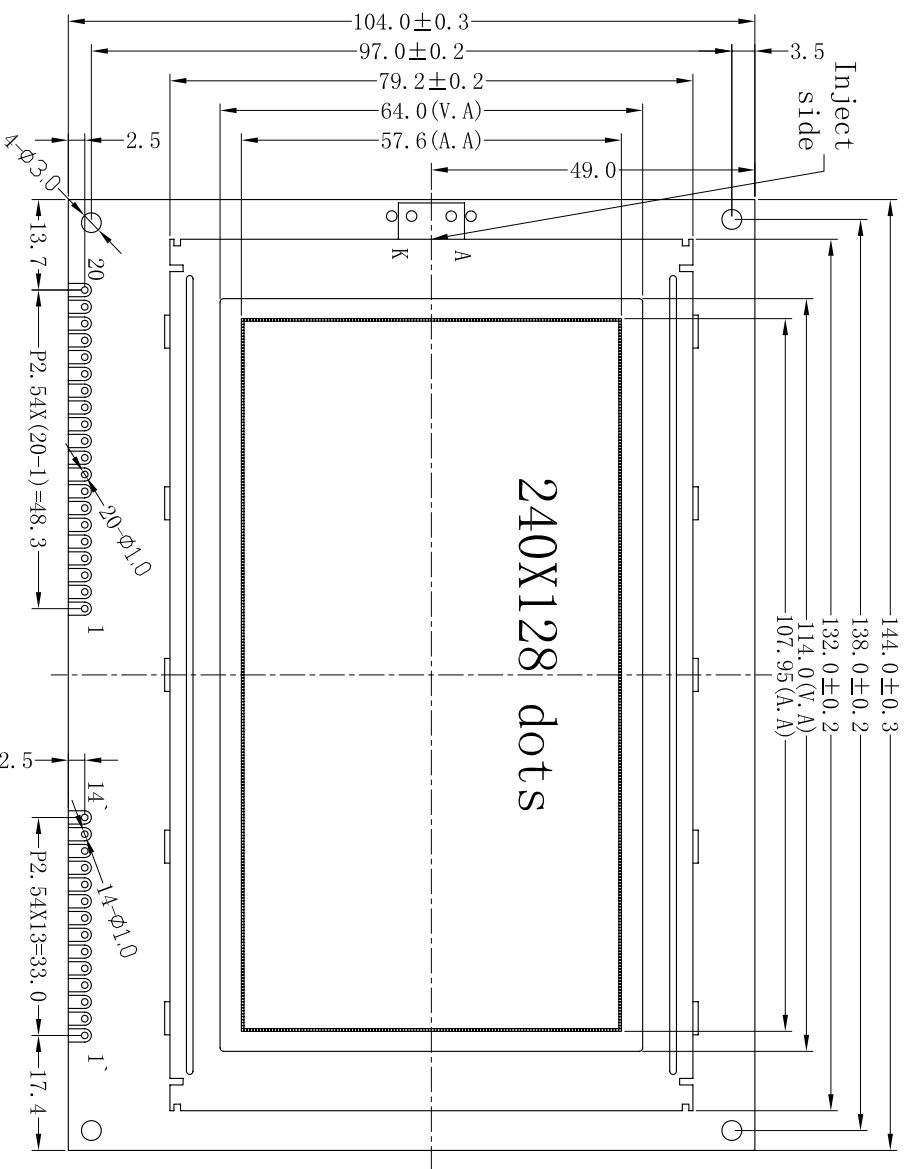


PIN NO	SYMBOL
1'	FLM
2'	CL2
3'	CL1
4'	M
5'	VDD
6'	VSS
7'	VEE
8'	DB0
9'	DB1
10'	DB2
11'	DB3
12'	V0
13'	LEDA
14'	LEDK

PIN NO	SYMBOL
1	VSS
2	VDD
3	V0
4	C/D
5	/RD
6	/WR
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CE
16	/RST
17	VEE
18	FS
19	LEDA
20	LEDK

Specification:

- 1). Driving: Duty:1/128, Bias:1/9, VLCD:14.5V,VDD:5.0V
  - 2). Viewing Direction: 6 O'clock
  - 3). Display mode:STN/Blue/Negative/Transmissive
  - 4). Operating temp.: -20°C~+70°C
  - 5). Storage temp.: -30°C~+80°C
  - 6). IC: T6963C
  - 7). Backlight: Bottom Y-G
- Dimensions with mark "\*" are important, with mark "()" are referenced



<p><b>深圳秋田微电子有限公司</b> SHENZHEN AVIDISPLAY CO.,LTD.</p>		SCALE: FIT 适应图面	
		SHEET: 1 OF 1	
PART NO: C/D		PROJECTION: 三角法	
MODEL NUMBER: ABG240128M00-B1Y		UNIT 单位: mm	
DATE: APP: _____		DATE: _____	
CHK: _____		DWN: _____	