
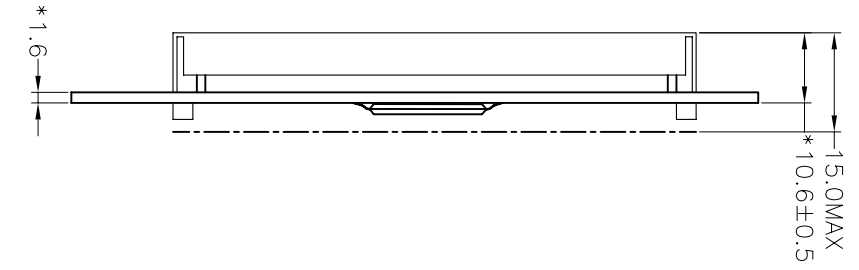


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	MAR-29-2007

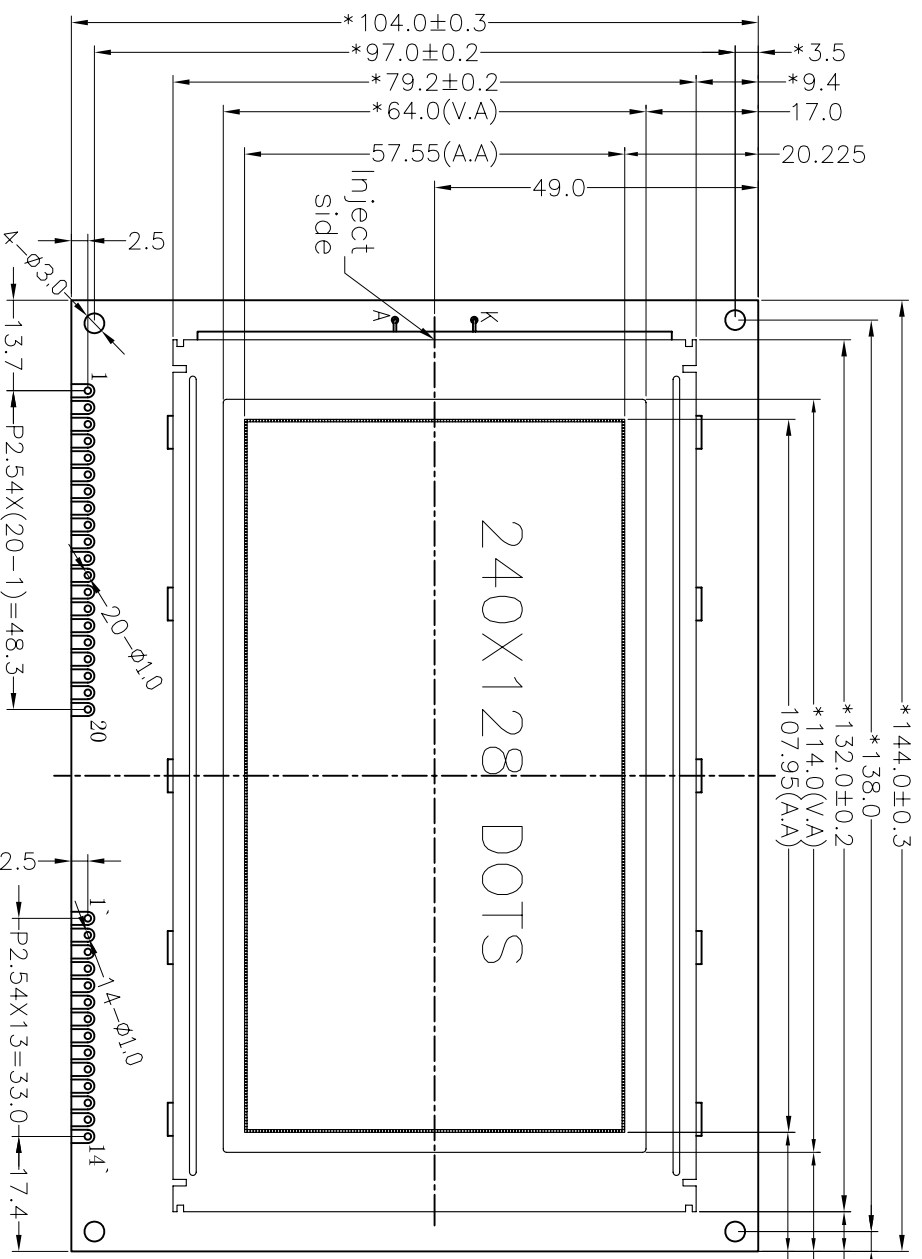




PIN NO	SYMBOL
1'	FLM
2'	CL2
3'	CL1
4'	M
5'	VDD
6'	VSS
7'	VEE
8'	DB0
9'	DB1
10'	DB2
11'	DB3
12'	V0
13'	LEDA
14'	LEDK

Specification:

- 1). Driving: Duty:1/128, Bias:1/12, VLCD:14.5V,VDD:5.0V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:FTN/Positive/Transflective
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC:T6A39/T6A40
- 6). Backlight: Side White
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). Meet for RoHS

VIEWING DIRECTION



 <p>深圳市秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO.,LTD.</p>		SCALE 比例	FTT 适应图面
		SHEET: 1	OF 1
PART NO: 零件编号 CD 结构图		PROJECTION 投影法	MODEL NUMBER 模组型号
FAV-ABC240128M06-R-00			ABC240128M06-FTW-R DO NOT SCALE THIS DRAWING.
APPROVALS 签字 APP:		GENERAL TOL: 公差 ±0.3	UNIT 单位 mm
CHK:		DWN:	DATE 日期