
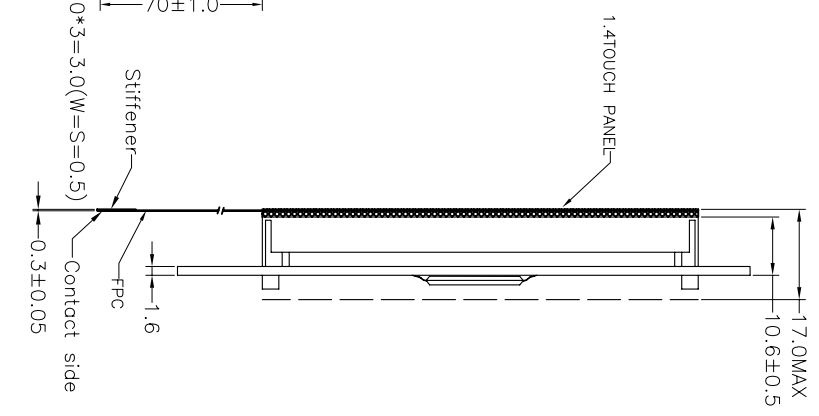


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	DEC-24-2005
A01	Change position of FPC ①	FEB-07-2006
A02	Update information	FEB-16-2006
A03	Carry out RoHS	APR-05-2006

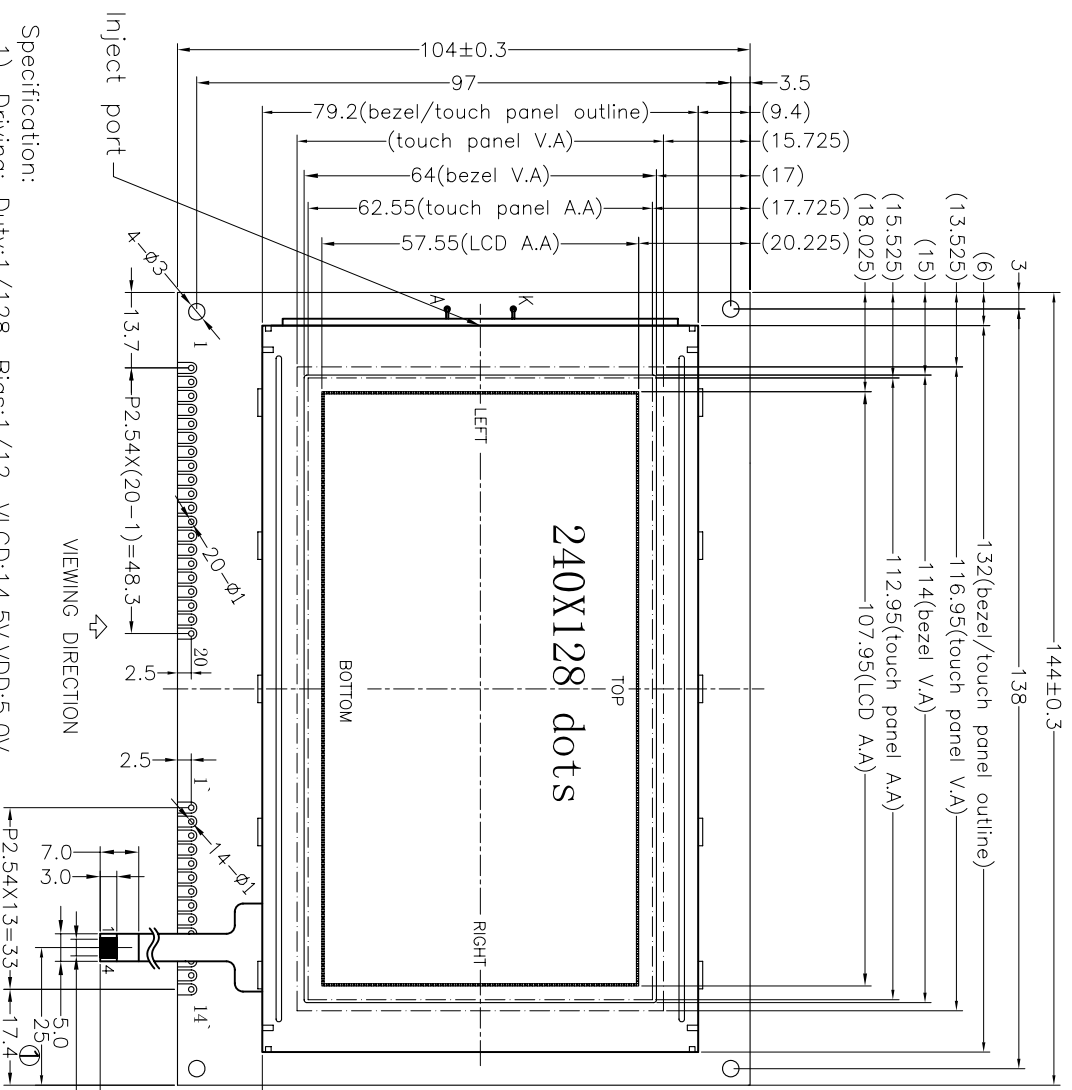


PIN NO	SYMBOL
1'	FLM
2'	CL2
3'	CL1
4'	M
5'	VDD
6'	VSS
7'	VEE
8'	DB0
9'	DB1
10'	DB2
11'	DB3
12'	VO
13'	LEDA
14'	LEDK

PIN NO	SYMBOL
1	VSS
2	VDD
3	VO
4	C/D
5	/RD
6	/WR
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CE
16	/RST
17	VEE
18	FS
19	LEDA
20	LEDK

TOUCH PANEL			
PIN	1	2	3
CONNECT	LEFT	BOTTOM	RIGHT
			TOP

Specification:

- 1). Driving: Duty:1/128, Bias:1/12, VLCD:1.4.5V, VDD:5.0V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/Blue/Negative/Transmissive
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 5). IC: SAP1024B
- 6). Backlight: Side White
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant



深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO., LTD.

PART NO: 零件编号	CD	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABG240128M01-BIW-R			ABG240128M01-BIW-R	SHEET: 1 OF 1	UNIT 单位 mm
				GENERAL TOL: ±0.3	DATE
				APPROVALS 签字	
				CHK: DWN:	

DO NOT SCALE THIS DRAWING.