

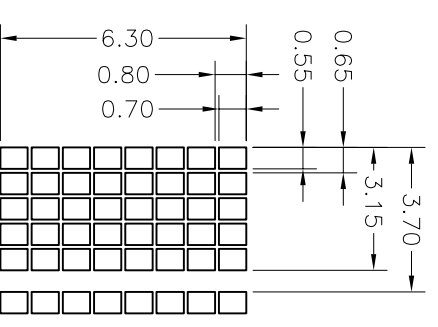


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	MAR-24-2006
B	RoHS ①	MAY-06-2006
C	Change IC ②	MAY-13-2006
D	Change LOGO ③	NOV-27-2007

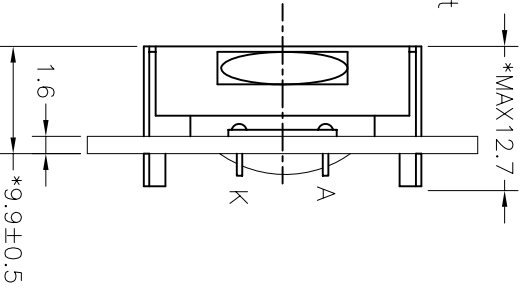


DOT SIZE
SCALE: 4:1

VIEWING DIRECTION

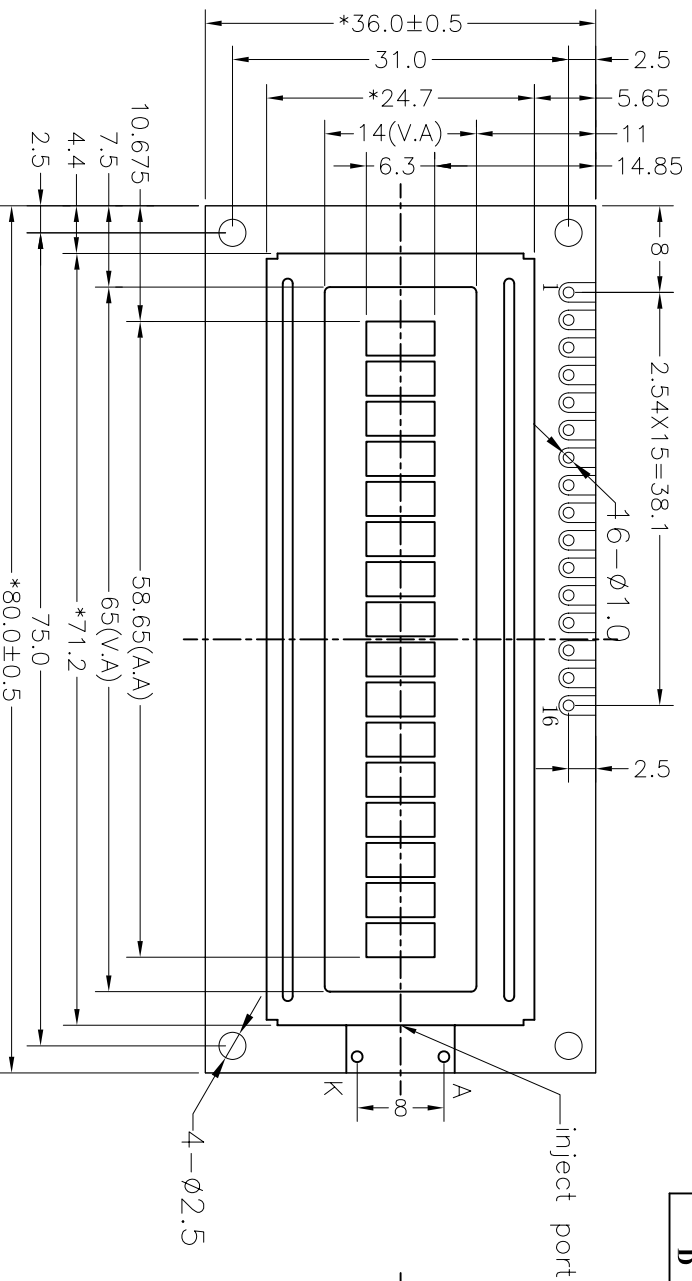


- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:4.5V
 - 2). Viewing direction: 6 o'clock
 - 3). Display mode: STN/Positive/Transflective/Grey
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 6). IC: SPLC780D-001B-C ②
 - 7). Backlight:Bottom, Yellow-green
 - 8). Dimensions with mark "*" are important, with mark "()" are referenced
 - 9). All the materials are RoHS compliant. ①

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	VO	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK



深圳秋田电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC016001A15-GHY-R				1 OF 1	
GENERAL TOL: ±0.3			未注公差	SHEET: 1	UNIT 单位
APP:			签字	DATE	mm
CHK:			日期		
DWN:					

DO NOT SCALE THIS DRAWING.

③