

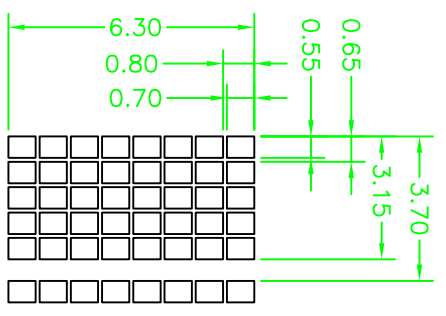


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	SEP-07-2007

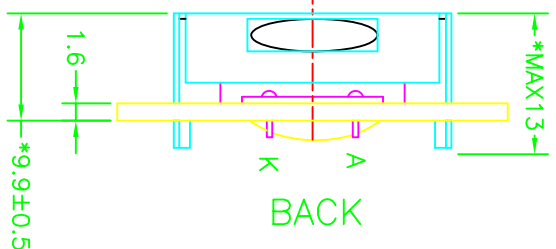

DOT SIZE  
SCALE: 4:1

VIEWING DIRECTION

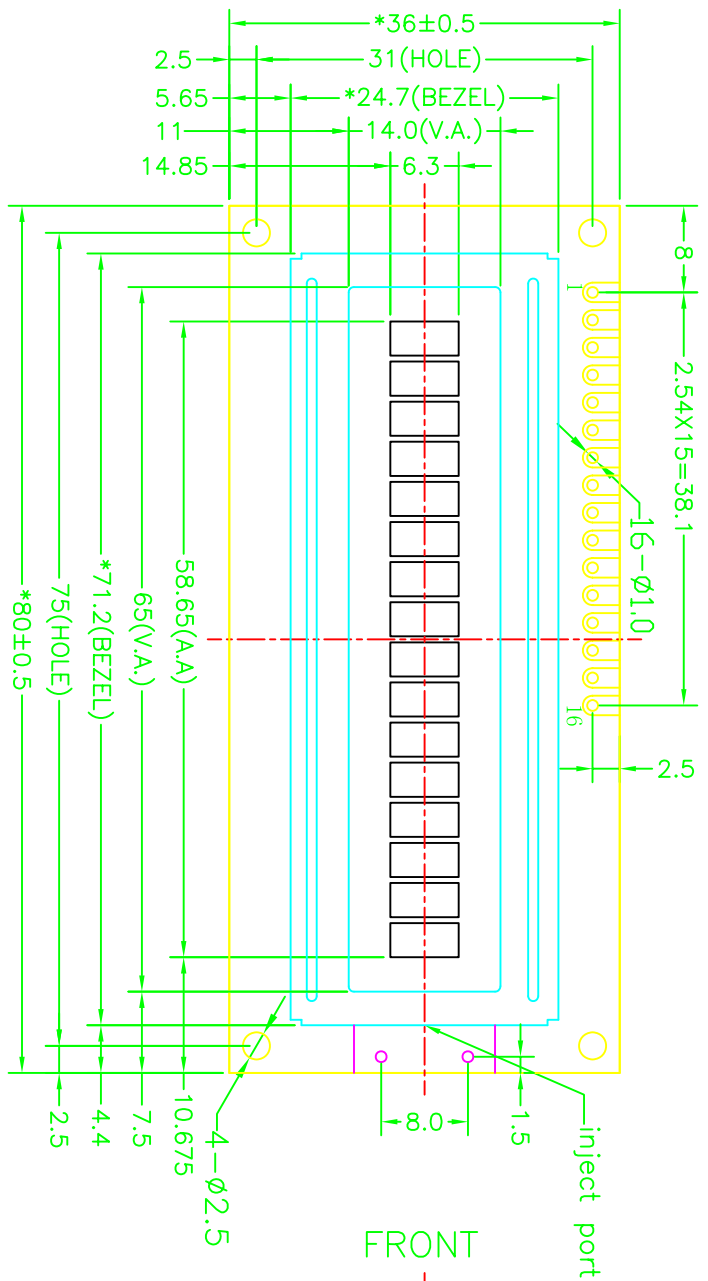

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vicd:4.5V
  - 2). Viewing direction: 6 O'clock
  - 3). Display mode: STN/Positive/Transflective/Y-G
  - 4). Operating temp.: -20°C~+70°C
  - 5). Storage temp.: -30°C~+80°C
  - 6). IC: **SPLC780D-001B-C**
  - 7). Backlight: Bottom, Yellow-green
  - 8). Dimensions with mark "\*" are important, with mark "()" are referenced
  - 9). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	VO	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

**深圳市秋田视佳实业有限公司**  
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC016001A14-YHY-R-01			ABC016001A14-YHY-R-01	SHEET: 1 OF 1	UNIT 单位 mm
APPROVALS 签字	APPR:	DO NOT SCALE THIS DRAWING.	CHK:	DWN:	DATE 日期

GENERAL TOL: ±0.3  
未注公差