



REV 版本	DESCRIPTION 描述	DATE 日期
A00	First Issue	Nov-02-2005

VIEWING DIRECTION

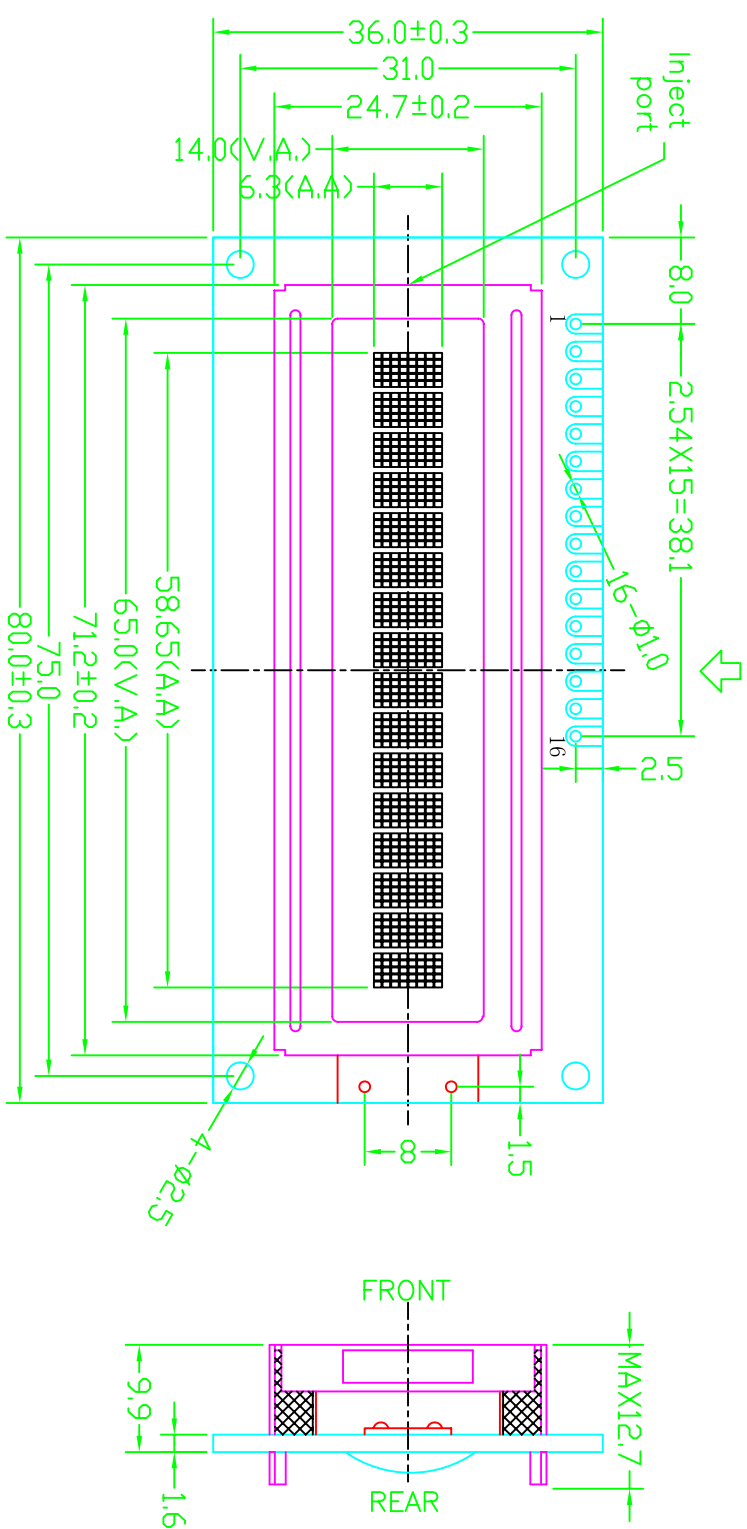

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.5V, VDD:5.0V
  - 2). Viewing Direction: 12 O'clock
  - 3). Display mode:TN/Positive/Transmissive
  - 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
  - 5). IC: S6A0069X01-COCX
  - 6). Backlight: Bottom Yellow-Green
  - 7). Dimensions with mark "\*" are important, with mark "()" are referenced

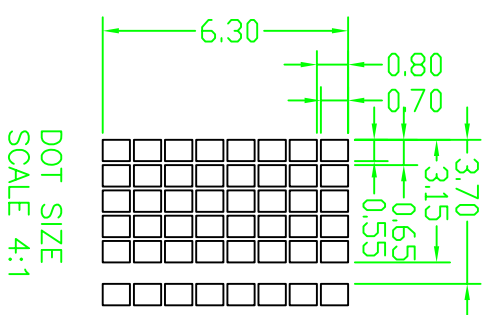

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

		<b>深圳秋田视佳实业有限公司</b> <b>SHENZHEN AV-DISPLAY CO., LTD</b>	
PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAV-ABC016001A11-00			ABC016001A11-TLY
SCALE: FIT 适应图面		SHEET: 1 OF 1	
GENERAL TOL: ±0.3		UNIT 单位: mm	
APP:	APPROVALS	DATE	日期
CHK:			
DWN:			