


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	JULY-22-2005

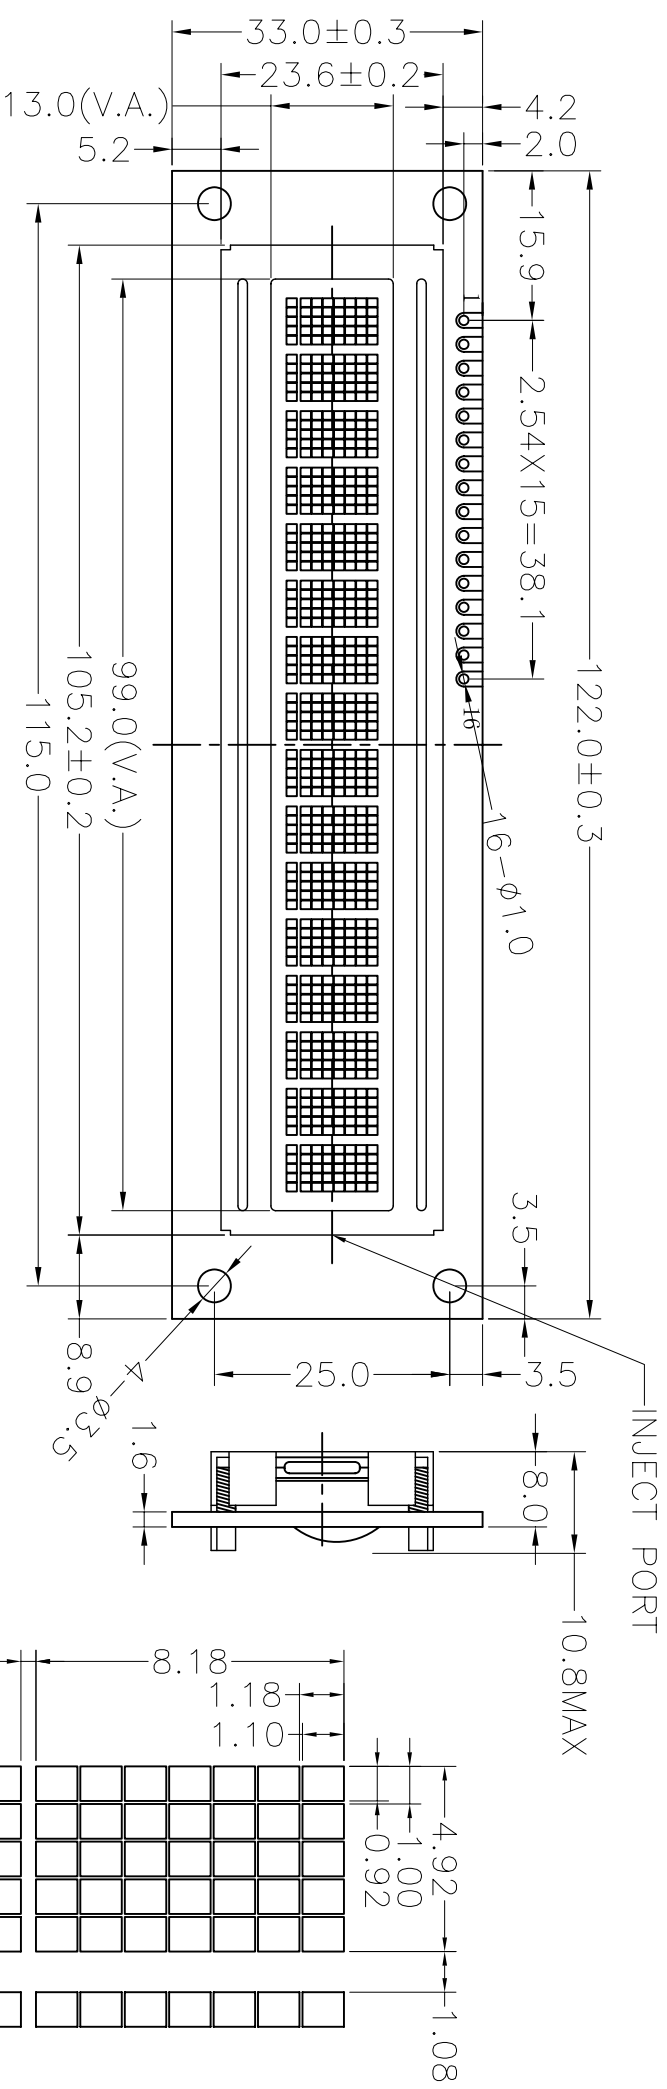

VIEWING DIRECTION

DOT SIZE
SCALE: 4:1

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	VEE	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vlcd:4.6V
 - 2). Viewing direction: 6 O'clock
 - 3). Display mode: STN/Positive/Reflective/Y-G
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 6). Drive ic: S6A0069X01-COCX
 - 7). Dimensions with mark "*" are important, with mark "(") are referenced

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAV-ABC016001B02-00			ABC016001B02-XGN
		DO NOT SCALE THIS DRAWING.	
		SCALE 比例	FIT 适应图面
		SHEET: 页次	1 OF 1
		GENERAL TOL: 公差	±0.3
		APPROVALS 签字	DATE 日期
		CHK:	
		DWN:	