

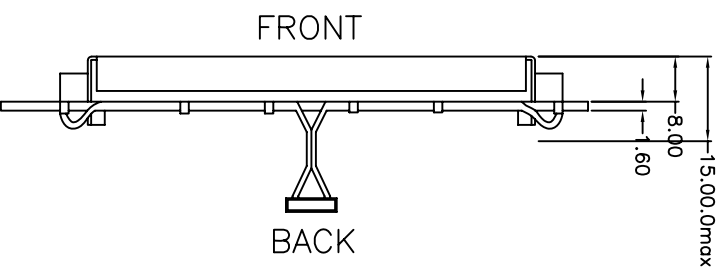


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	JUN-24-2005

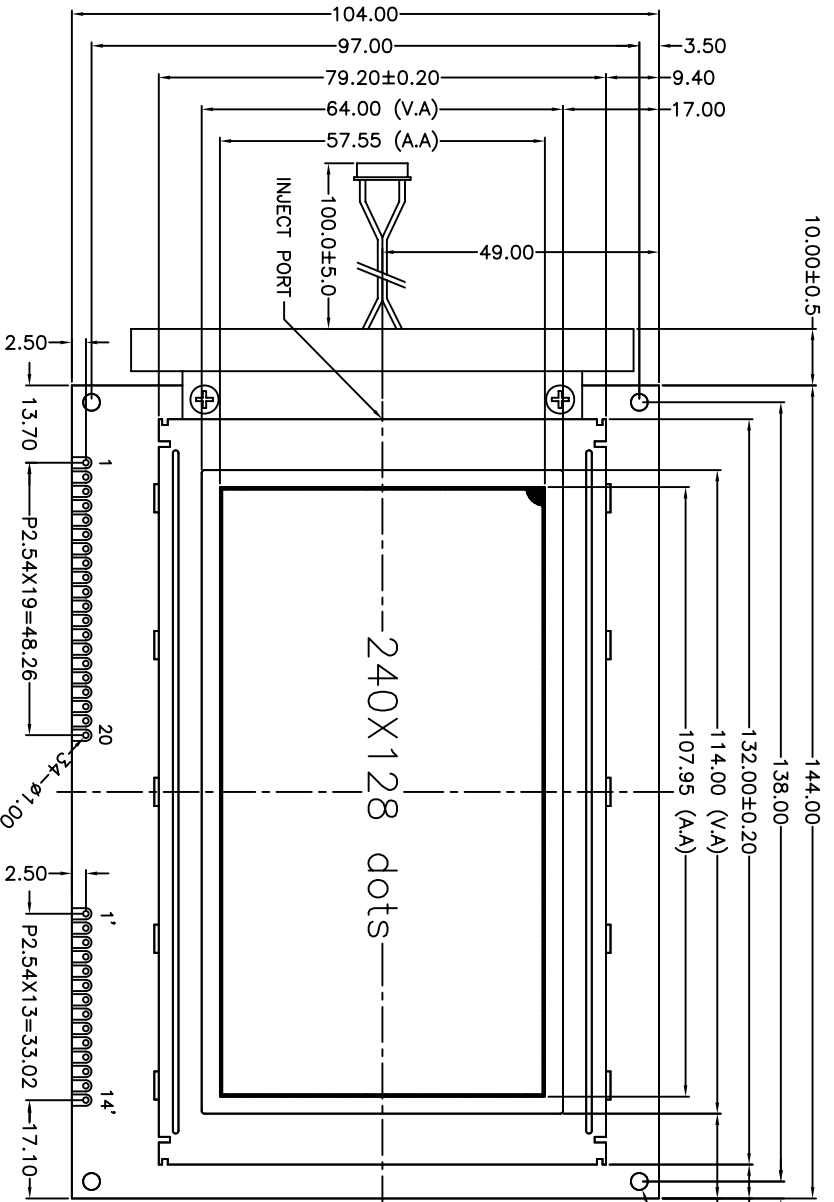

DOT SIZE
SCALE 12:1

Specification:

- 1). Driving: Duty:1/128, Bias:1/12, Vdd:5.0V Vlcd:1.4.5V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp.: -10°C~+55°C
- 5). Storage temp.: -20°C~+70°C
- 6). Use IC: KS0086 T6963C
- 7). Backlight: CCFL WHITE
- 8). Dimensions with mark "*" are important, with mark "()" are referenced

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
CONNECTOR	VSS	VDD	VO	C/D	/ND	/MR	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	/CE	/RST	VBE	FS	NC	NC
PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14						
CONNECTOR	FRM	CL2	CL1	M	VDD	VSS	VBE	DB0	DB1	DB2	DB3	VO	NC	NC						

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO:	C/D	PROJECTION	MODEL NUMBER
零件编号		三角法	模组型号
FAV-ABG240128A02-00			ABG240128A02-BC
SCALE: FTT 适应图面		SHEET: 1 OF 1	
比例		页次	
GENERAL TOL: ±0.3		UNIT: mm	
未注公差		DATE	
APP:	签字	CHK:	日期
DWN:			