


| REV 版本 | DESCRIPTION 描述 | DATE 日期 |
|--------|----------------|-------------|
| A00 | First issue | SEP-21-2005 |
| A01 | Meet for RoHS | MAY-10-2007 |

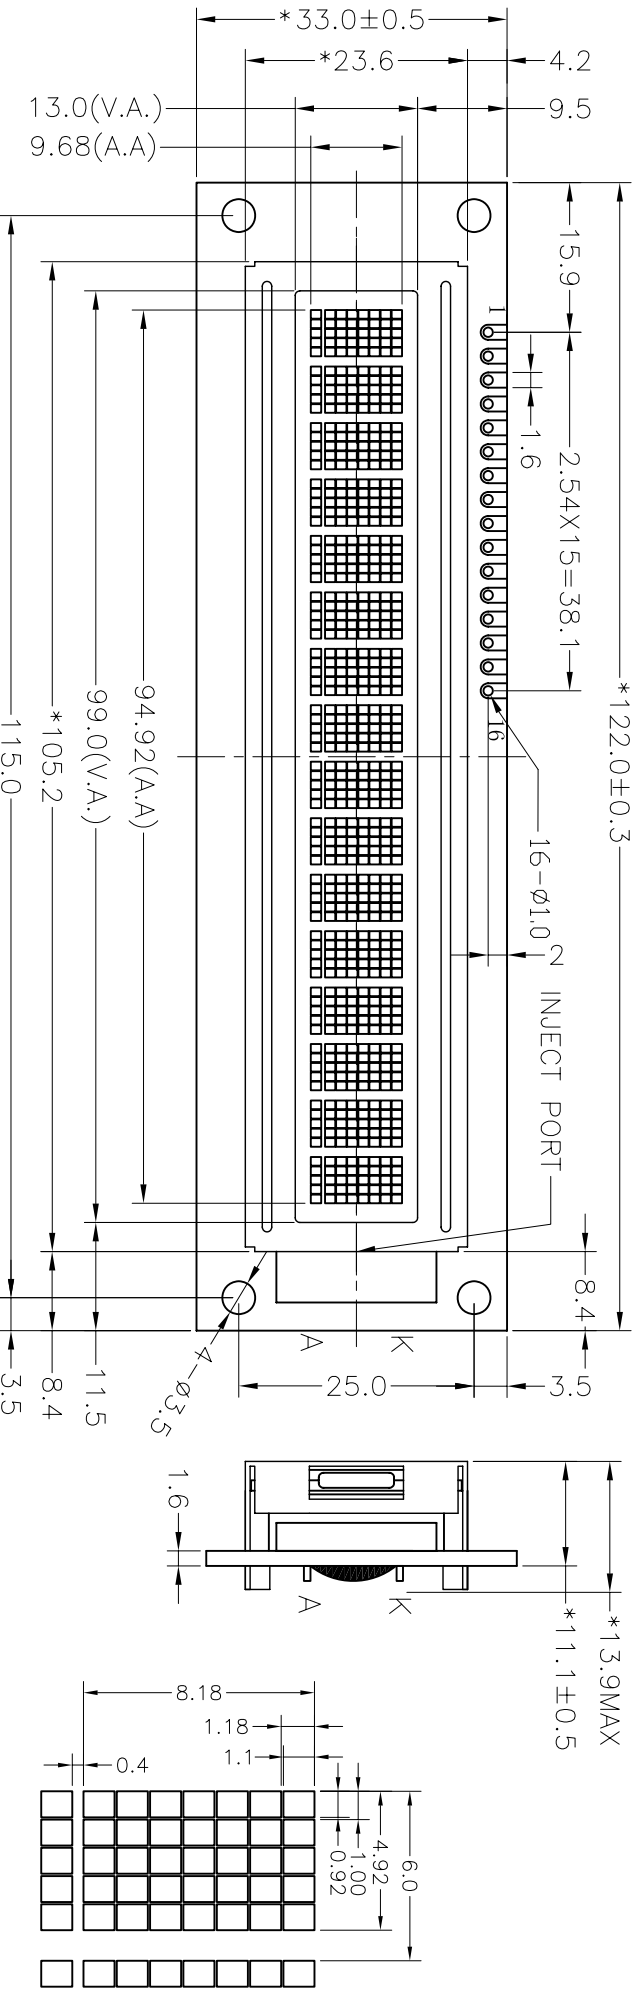

VIEWING DIRECTION

DOT SIZE
SCALE: 3:1

| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|-----------|-----|-----|-----|-----|-----|-----|------|------|
| CONNECTOR | VSS | VDD | VO | RS | R/W | E | DB0 | DB1 |
| PIN | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| CONNECTOR | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | LEDA | LEDK |

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:4.3V
 - 2). Viewing direction: 6 O'clock
 - 3). Display mode: FSTN/Positive/Transflective/Grey
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 5). IC: SPLC780D-001B-C
 - 6). Backlight: Side, White
 - 7). Dimensions with mark "*" are important, with mark "()" are referenced
 - 8). All the raw materials are RoHS compliant

深圳市秋田视佳实业有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

| | | | | | |
|-----------------------|--------|-------------------|----------------------|--------------------|---------------|
| PART NO: 零件编号 | CD 结构图 | PROJECTION 三角法 | MODEL NUMBER 模组型号 | SCALE: 比例 | FTT 适应图面 |
| FAV-ABC016001B05-R-01 | | | ABC016001B05-PTH-R | SHEET: 页次 | 1 OF 1 |
| | | | | GENERAL TOL: 公差 | ± 0.3 |
| | | | | APPROVALS 签字 | UNIT 单位 mm |
| | | | | CHK: 日期 | DATE |
| | | | | DWN: 日期 | |

DO NOT SCALE THIS DRAWING.