



REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	Aug-03-2005

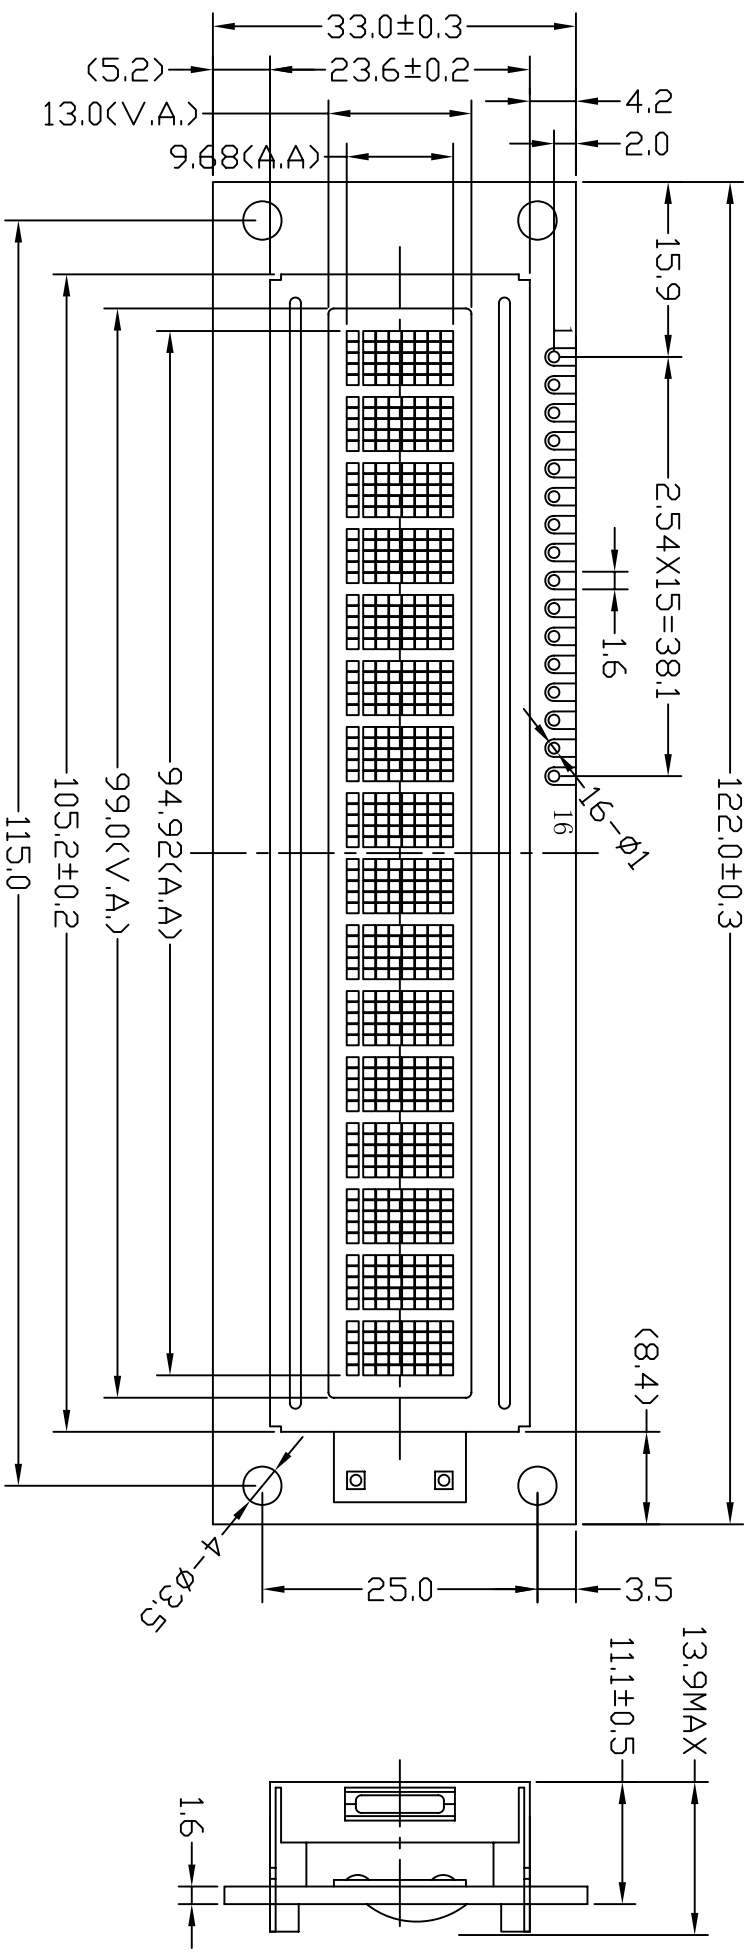

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.6V, VDD:5.0V
- 2). Viewing Direction: 12 O'clock
- 3). Display mode:STN/Y-G/Positive/Transflective
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: SPLC780D
- 6). Backlight: Bottom Y-G
- 7). Dimensions with mark "*" are important, with mark "()" are referenced

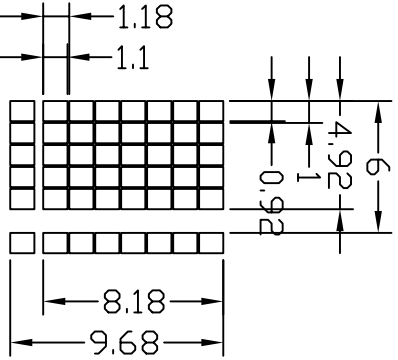

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LED	LEDK

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAV-ABC016001B04-00			ABC016001B04-XY
SCALE 比例		FTT 适应图面	
SHEET: 页次		1 OF 1	
GENERAL TOL: 公差		±0.3	
APP: 签字	APPROVALS	UNIT 单位	DATE 日期
CHK: 签字		mm	
DWN: 签字			