

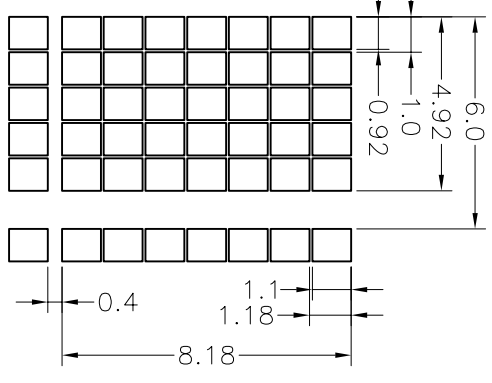


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	AUG-25-2007

VIEWING DIRECTION

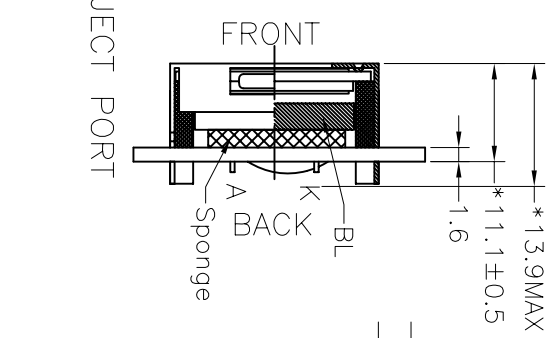

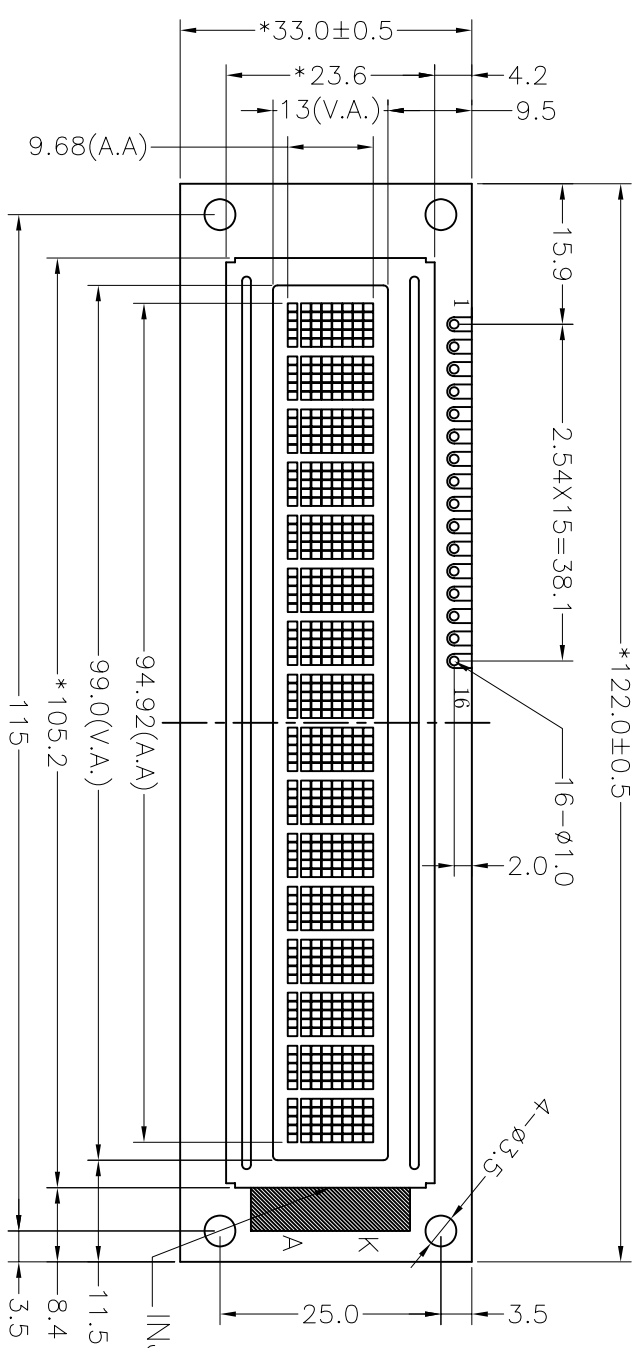

DOT SIZE
 SCALE: 4:1



PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	VEE	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:3.3V, VDD:3.3V
- 2). Viewing direction: 12 O'clock
- 3). Display mode: STN/Positive/Transflective/Grey
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). IC: SPLC780D-01
- 7). Backlight: Side, Amber ,
- 8). Dimensions with mark "k" are important, with mark "()" are referenced
- 9). All the raw materials are RoHS compliant.



深圳市秋田视佳实业有限公司
 SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FIG 适应图面
FAY-ABC016001B21-R-00			ABC016001B21-G&K&R	SHEET: 页次	1 OF 1
			DO NOT SCALE THIS DRAWING.	GENERAL TOL: 公差	±0.3
				APP: 签字	
				CHK: 日期	
				DWN: 日期	