


REV 版本	DESCRIPTION 描述	DATE 日期
A	First Issue	Feb-28-2008

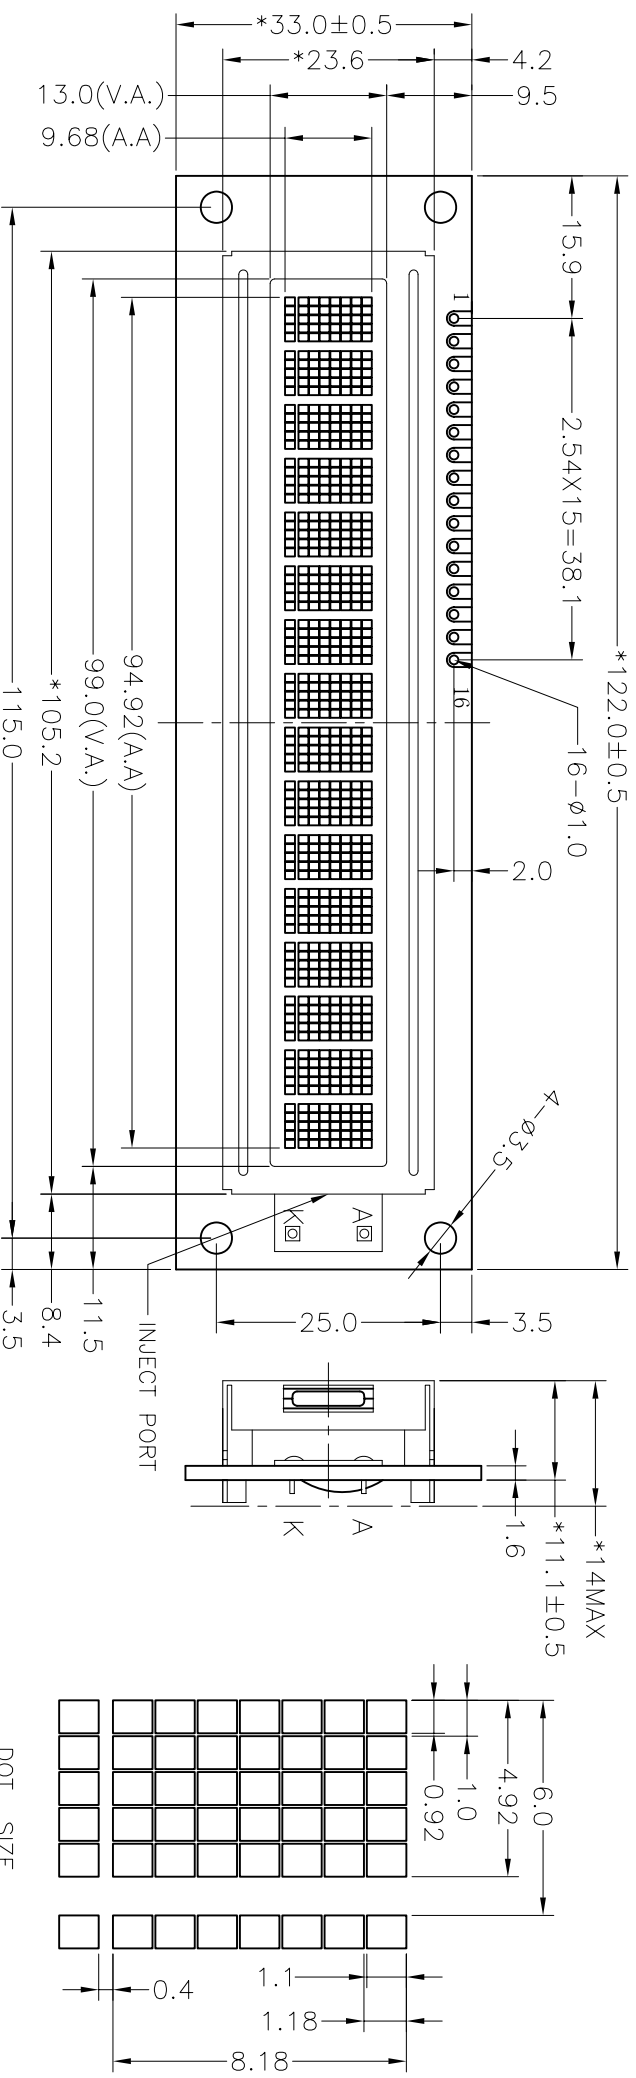


VIEWING DIRECTION

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vlcd:4.6V
- 2). Viewing direction: 6 O'clock
- 3). Display mode: STN/Positive/Transflective /Grey
- 4). Operating temp.: -20°C ~ +70°C
- 5). Storage temp.: -30°C ~ +80°C
- 6). Drive IC: SPLC780D-001B-C(Or Compatible)
- 7). Backlight: Bottom, Yellow-green ,
- 8). Dimensions with mark "\*" are important, with mark "(") are referenced
- 9). All the raw materials are RoHS compliant.

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	VEE	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK



**深圳秋田微电子有限公司**  
SHENZHEN AVADISPLAY CO.,LTD.

PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 机组型号	SCALE: 比例	FIT 适应图面
ABC016001B23-GHY-R			ABC016001B23-GHY-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 米注公差	±0.3
				APPROVALS 签字	DATE 日期
				CHK: APP:	
				DWN:	

DO NOT SCALE THIS DRAWING.