


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	AUG-25-2007

VIEWING DIRECTION



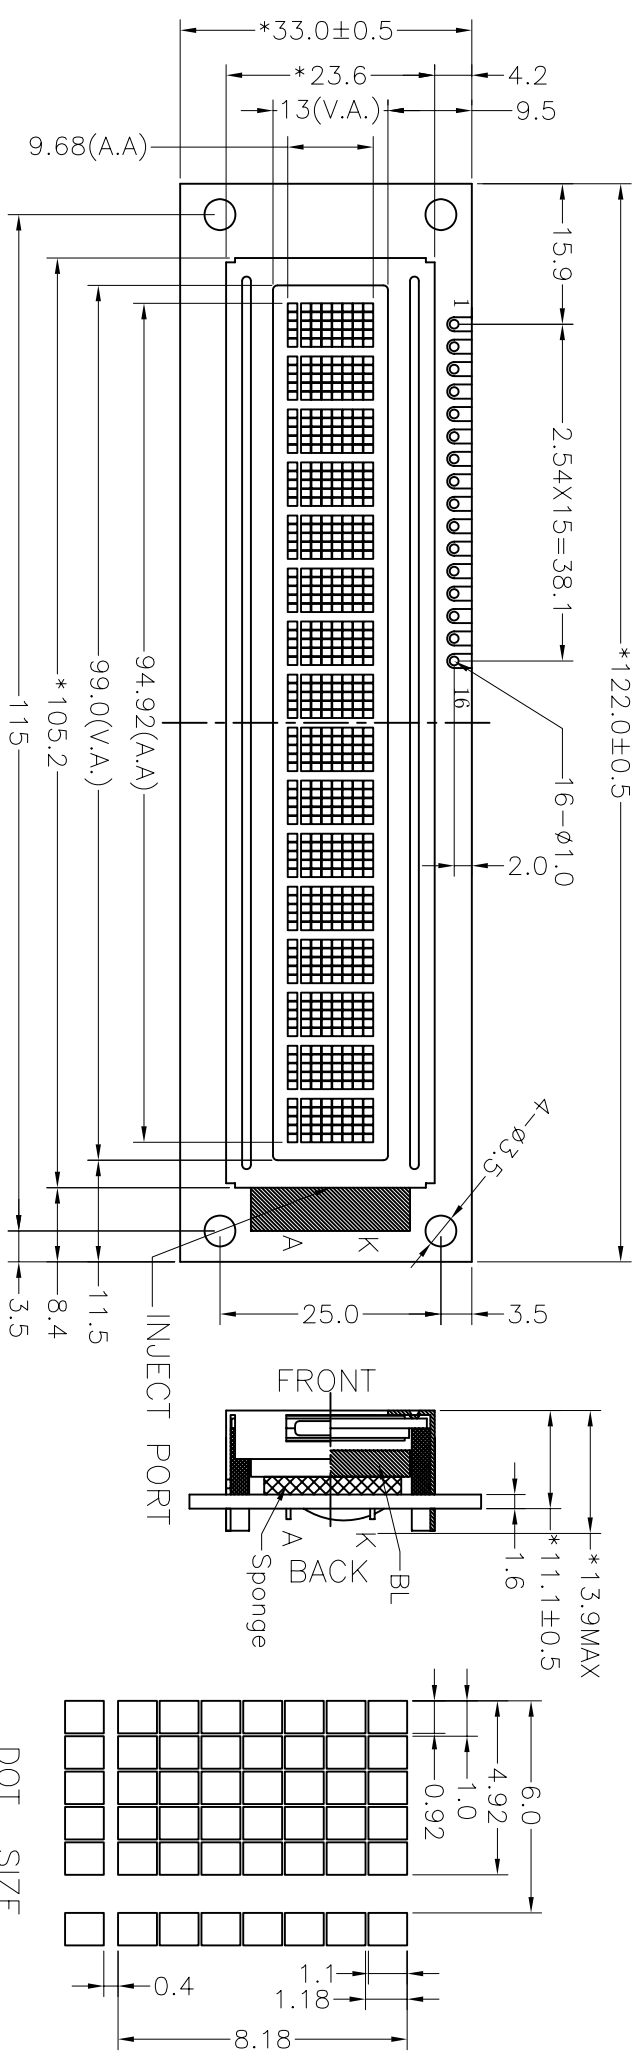

Specification:


- 1). Driving: Duty:1/16, Bias:1/5, VLCD:3.3V, VDD:3.3V
- 2). Viewing direction: 12 O'clock
- 3). Display mode: FSTN/Positive/Transflective/Grey
- 4). Operating temp.: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- 5). Storage temp.: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- 6). IC: SPLC780D-01
- 7). Backlight: Side, Blue ,
- 8). Dimensions with mark "k" are important, with mark "()" are referenced
- 9). All the raw materials are RoHS compliant.

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	VEE	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

DOT SIZE
 SCALE: 4:1



深圳市秋田视佳实业有限公司
 SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FIT 适应图面
FAY-ABC016001B20-R-00		ABC016001B20-FKB-R	APPROVALS 签字	SHEET: 页次	1 OF 1
			DATE 日期	UNIT UNIT mm	
			CHK: DWN:	GENERAL TOL: 公差	± 0.3
				APP:	
				DO NOT SCALE THIS DRAWING.	