


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	JUN-27-2006

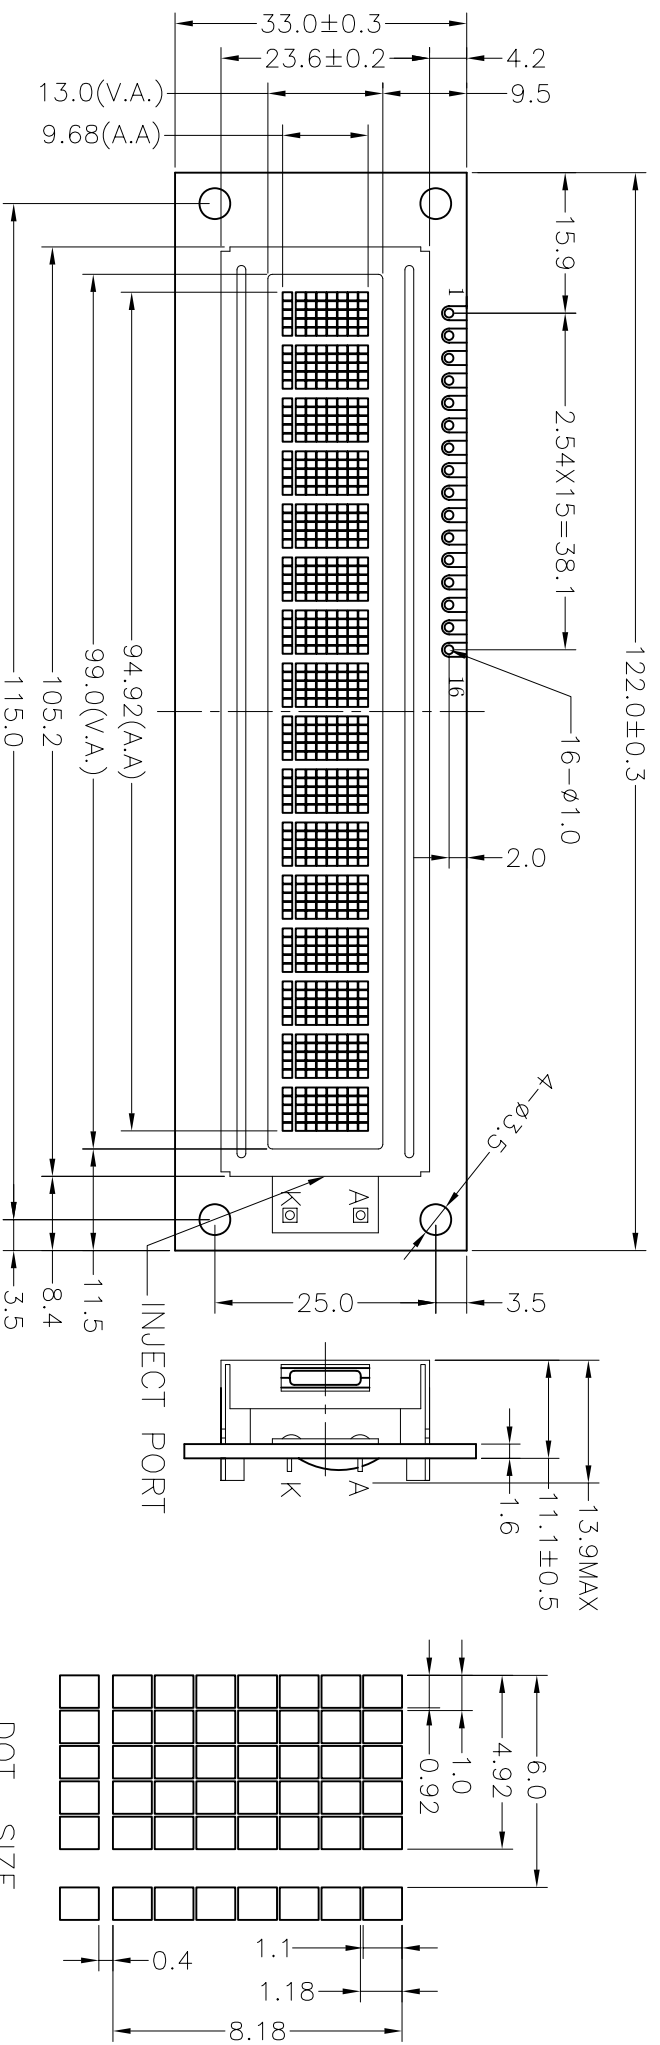

VIEWING DIRECTION

DOT SIZE  
SCALE: 4:1

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	VEE	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:3.3V
- 2). Viewing direction: 6 O'clock
- 3). Display mode: TN/Positive/Transflective/Grey
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). Drive ic: SPLC780D-001B-C
- 7). Backlight: Bottom, Yellow-green ,
- 8). Dimensions with mark "\*" are important, with mark "()" are referenced

		<b>深圳秋田视佳实业有限公司</b> <b>SHENZHEN AV-DISPLAY CO., LTD</b>	
PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAV-ABC016001B10-00			ABC016001B10-1TH
		DO NOT SCALE THIS DRAWING.	
		SCALE 比例	FTT 适应图面
		SHEET: 页次	1 OF 1
		GENERAL TOL: 公差	±0.3
		APPROVALS 签字	DATE 日期
		CHK:	
		DWN:	