



REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	JUN-27-2006

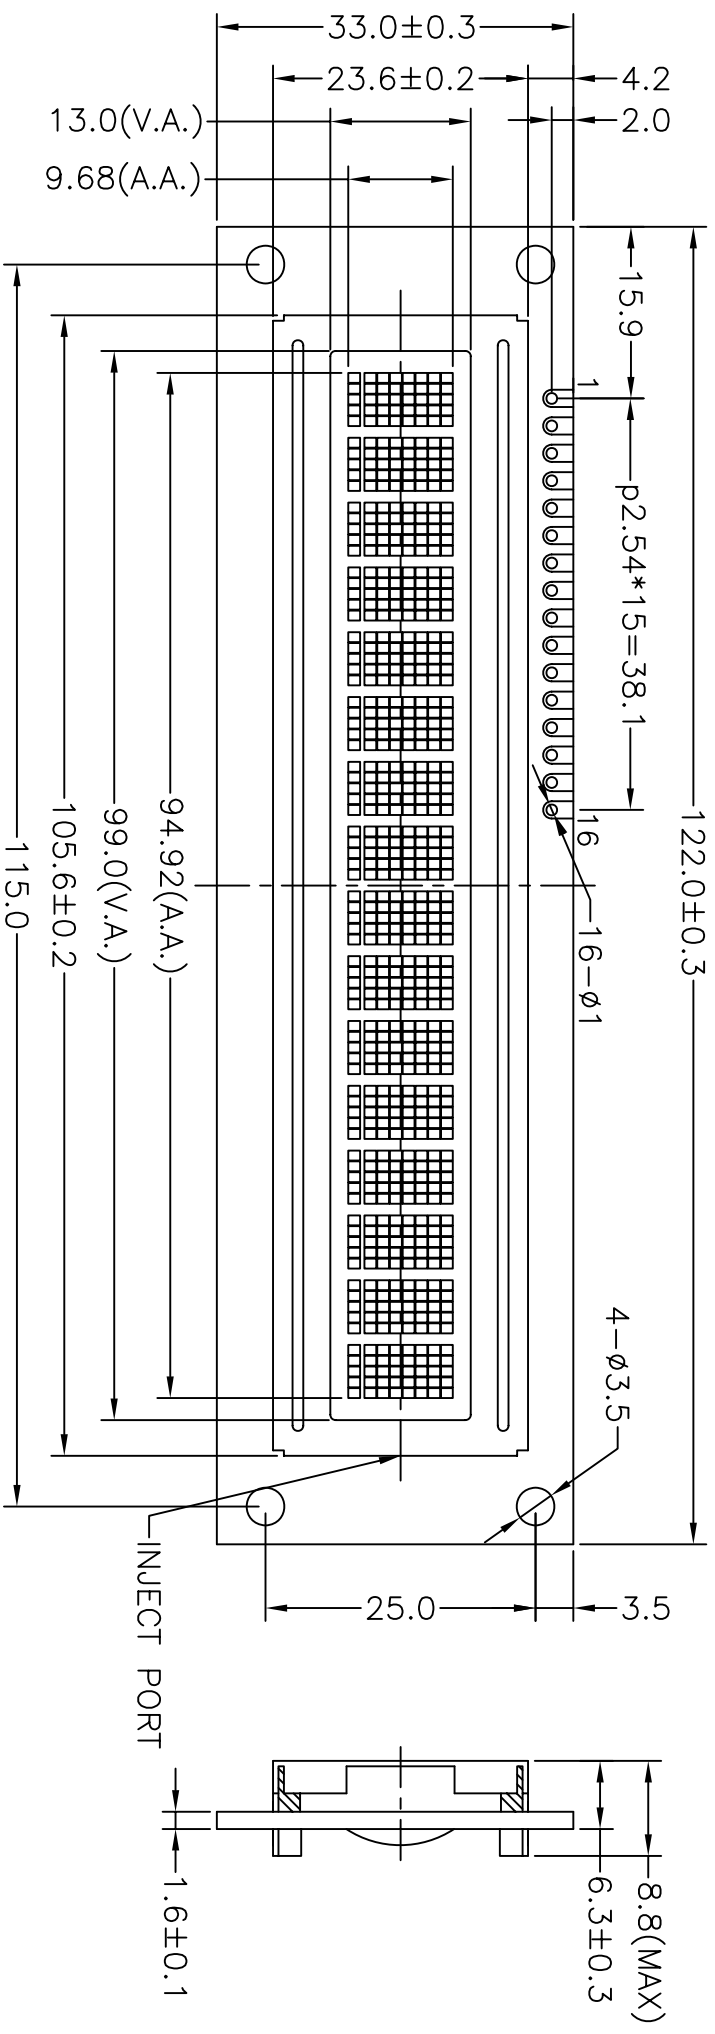

VIEWING DIRECTION

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vlcd:3.3V
- 2). Viewing direction: 6 O'clock
- 3). Display mode: TN/Positive/Reflective
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). Drive ic: SPLC780A OR EQU
- 7). Backlight: None
- 8). Dimensions with mark "*" are important, with mark "()" are referenced

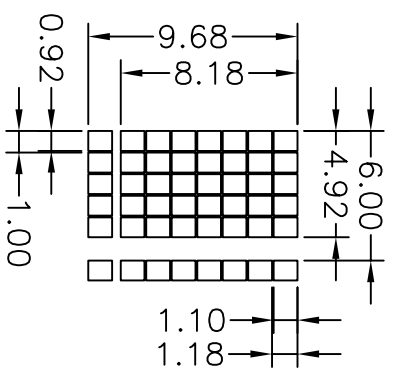

DOTS SIZE
SCALE 2:1

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	VEE	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	NC	NC

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD		SCALE: FIT 适应图面 比例: 1 OF 1	
PART NO: 零件编号	C/D	PROJECTION 三角法	MODEL NUMBER 模组型号	SHEDT: 页次	GENERAL TOL: 公差
FAV-HY-1601E-001-00			HY-1601E-001	1	±0.3
			APPROVALS 签字	DATE 日期	UNIT 单位 mm
			CHK: DWN:		