
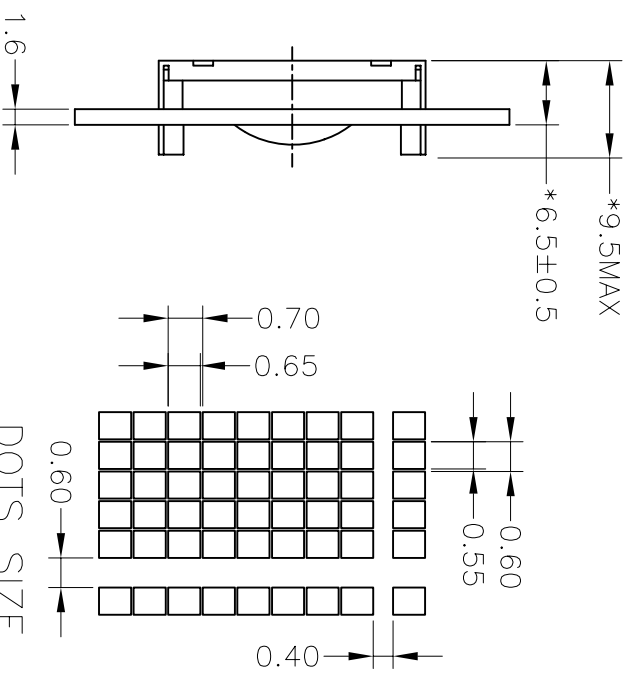


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	Aug-30-2007
B	Update	Nov-28-2007

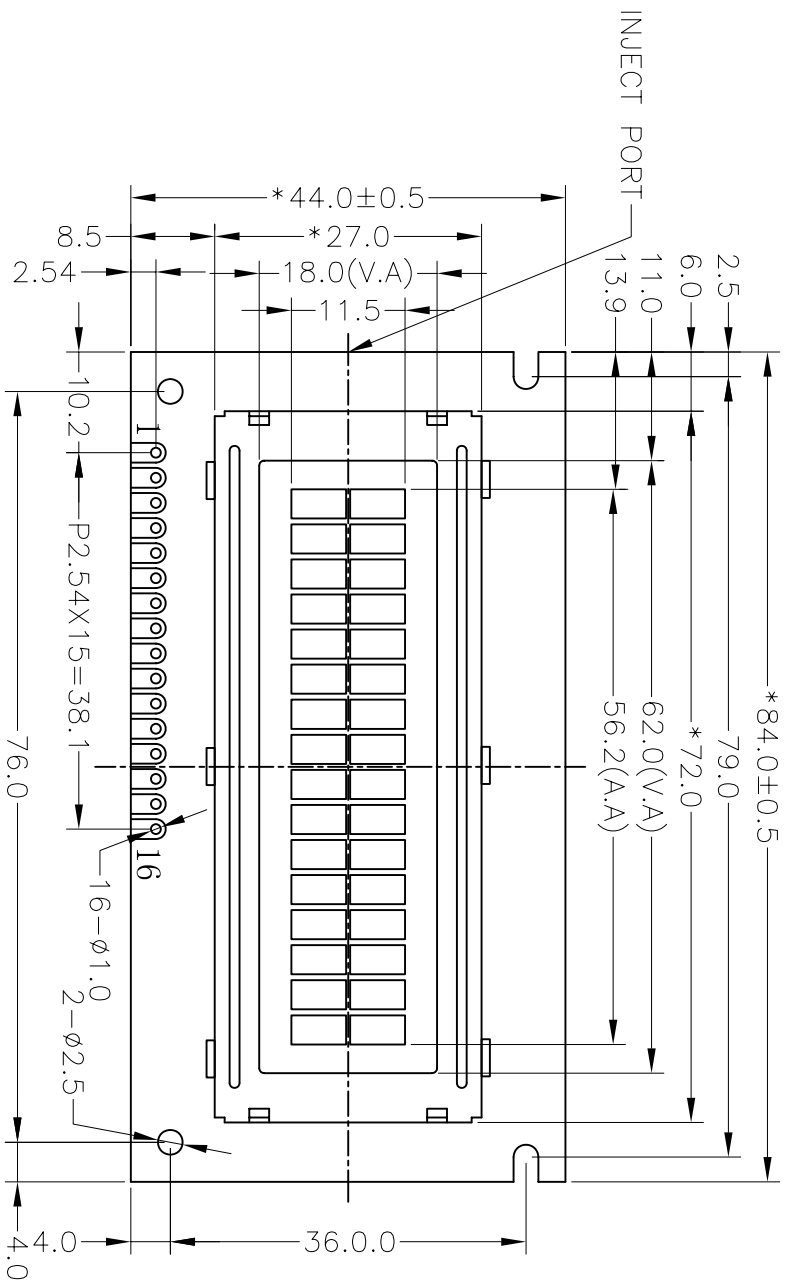

VIEWING DIRECTION

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V VLCD:4.8V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Positive/Reflective/Y-G
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). IC: SPLC780D-001B-C(or compatible)
- 7). Backlight:None
- 8). Dimensions with mark "*" are important, with mark "(") are referenced
- 9). All the raw materials are RoHS compliant.

PIN	1	2	3	4	5	6	7	8
CONNECTOR	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
PIN	9	10	11	12	13	14	15	16
CONNECTOR	E	R/W	RS	VO	VDD	VSS	NC	NC

深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE: 比例	FTT 适应图面
ABC016002G12-YGN-R			ABC016002G12-YGN-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				APPROVALS 签字	UNIT 单位 mm
				CHK: DWN:	DATE 日期

DO NOT SCALE THIS DRAWING.