



REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	Nov-17-2007

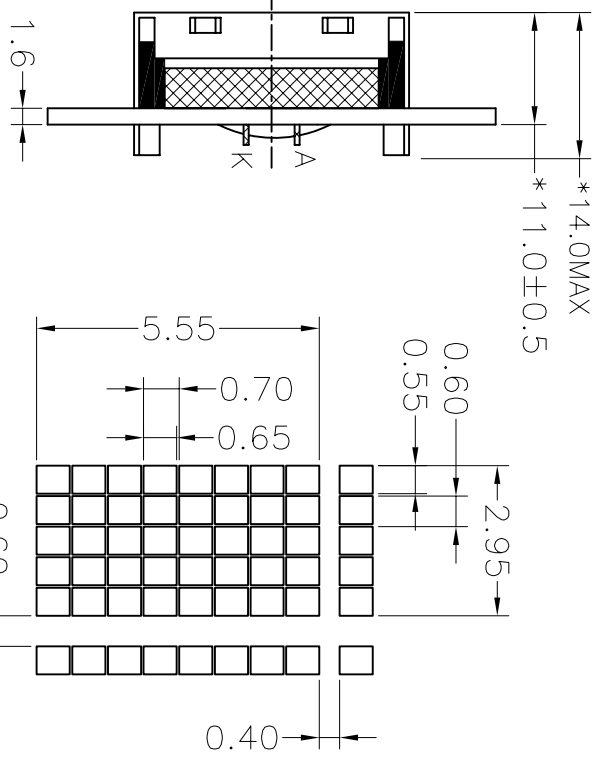


VIEWING DIRECTION

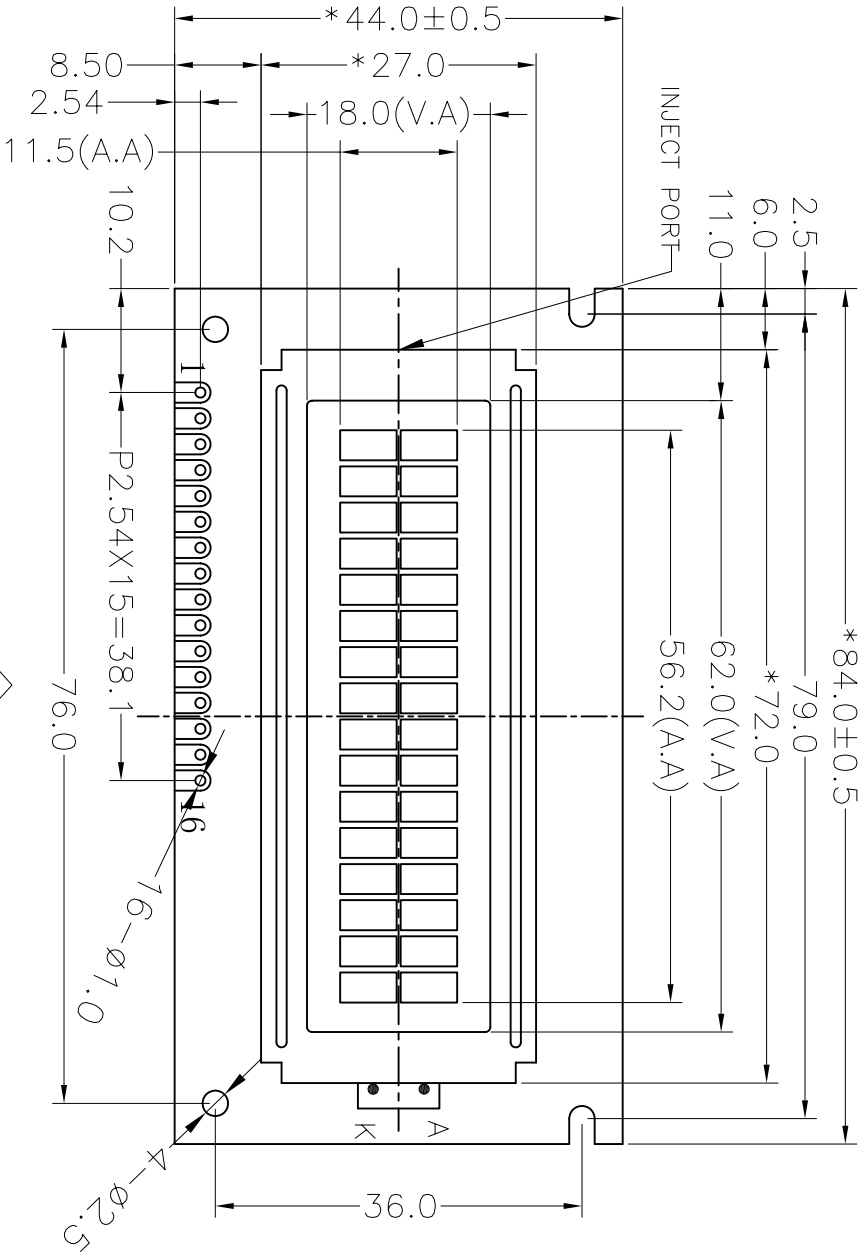

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:4.8V
 - 2). Viewing direction: 6 O'clock
 - 3). Display mode: STN/Positive/Transflective/Y-G
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 6). Drive IC: SPLC780D-001B-C
 - 7). Backlight:Bottom, Yellow-Green,
 - 8). Dimensions with mark "*" are important, with mark "()" are referenced
 - 9). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8
CONNECTOR	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
PIN	9	10	11	12	13	14	15	16
CONNECTOR	E	R/W	RS	VO	VDD	VSS	LEDA	LEDK

DOT SIZE
SCALE: 5:1



深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FIT 适应图面
ABC016002G11-YHY-R-01			ABC016002G11-YHY-R-01	SHEET: 页次	OR
				1	1
				GENERAL TOL: 公差	UNIT 单位 mm
				±0.3	DATE 日期
				APP: 签字	
				洪俊斌	
				CHK: 签字	
				邵飞兰	
				DWN: 签字	
				郑学东	

DO NOT SCALE THIS DRAWING.