
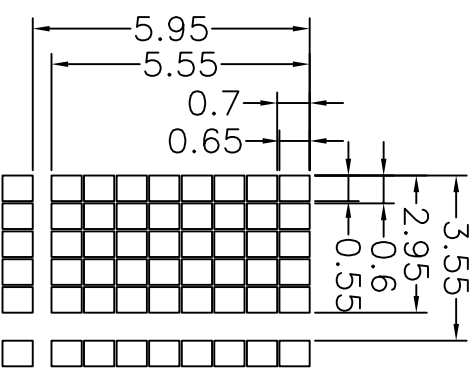
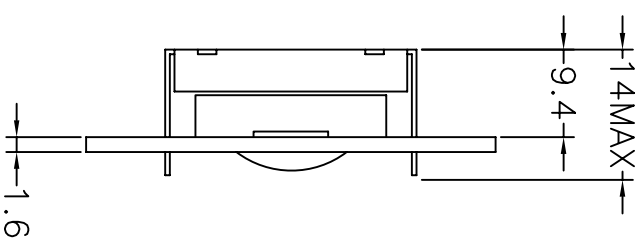


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	Nov-19-2005

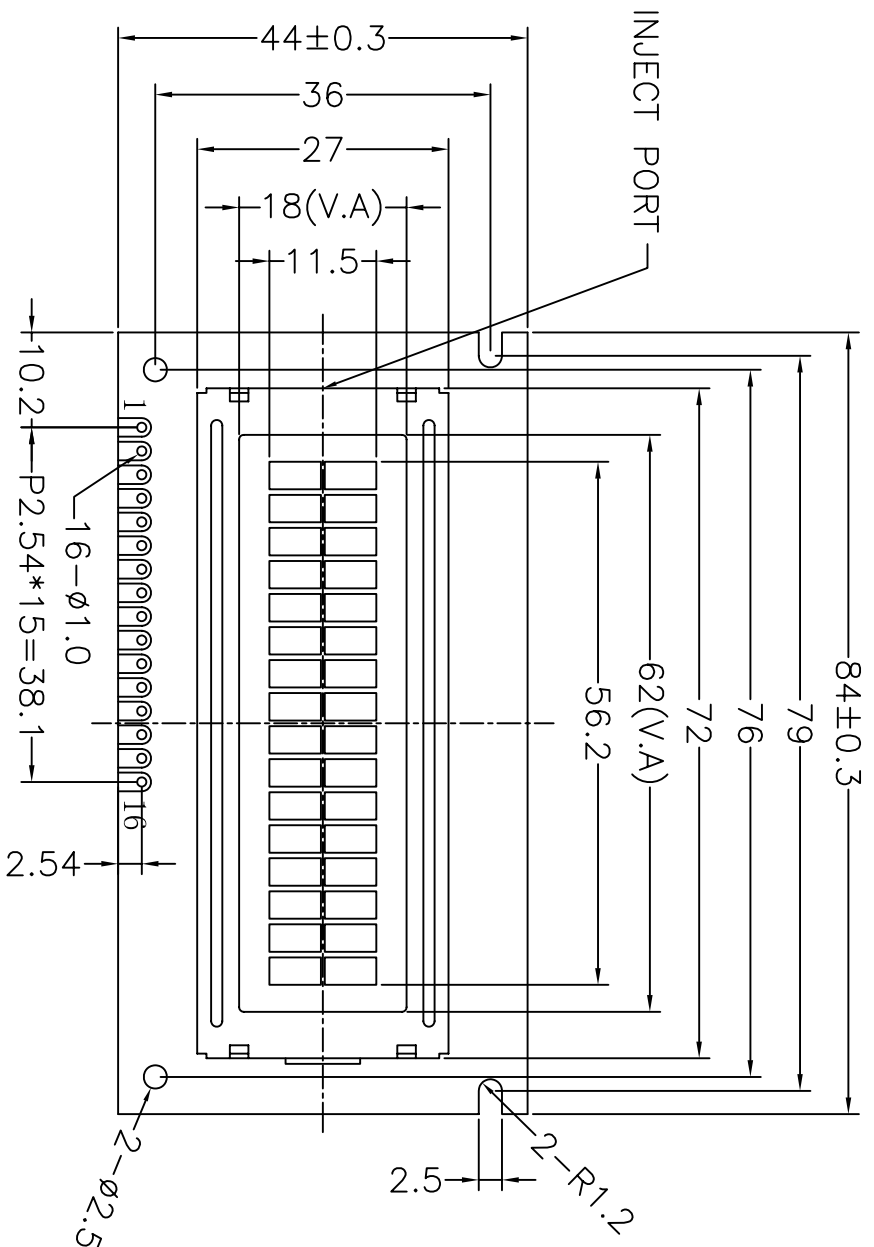

SCALE 5/1

PIN	1	2	3	4	5	6	7	8
CONNECTION	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
PIN	9	10	11	12	13	14	15	16
CONNECTION	E	R/W	RS	VO	VDD	VSS	A	K

VIEWING DIRECTION



Specification:

- 1). Driving: Duty: 1/16, Bias:1/5, VLCD:4.8V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Grey/Positive/Transflective
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 5). IC: SPLC780D-02(RUSSIAN)
- 6). Backlight: Bottom Y/G
- 7). Dimensions with mark "\*" are important, with mark "()" are referenced

		<b>深圳秋田视佳实业有限公司</b> <b>SHENZHEN AV-DISPLAY CO., LTD</b>	
PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAV-ABC016002G05-00			ABC016002G05-GHY
		SCALE: FIT 适应图面	
		SHEET: 1 OF 1	
		GENERAL TOL: ±0.3	
		UNIT: mm	
		APPROVALS	
APP:	CHK:	DWN:	DATE