



REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	MAR-16-2006



VIEWING DIRECTION

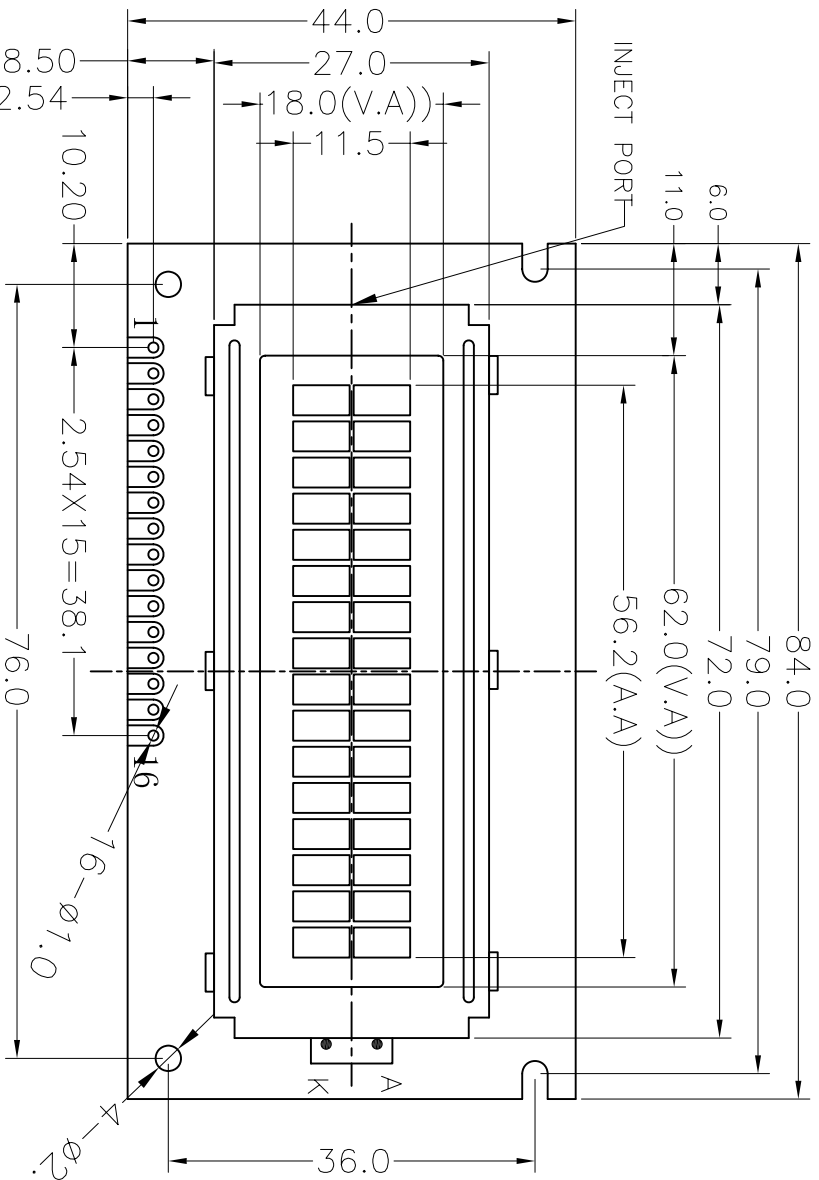

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vlcd:4.8V
 - 2). Viewing direction: 6 O'clock
 - 3). Display mode: HTN/Positive/Transflective
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 6). Drive ic: SPLC780C-02
 - 7). Backlight:Bottom, Yellow-Green,
 - 8). Dimensions with mark "*" are important, with mark "()" are referenced

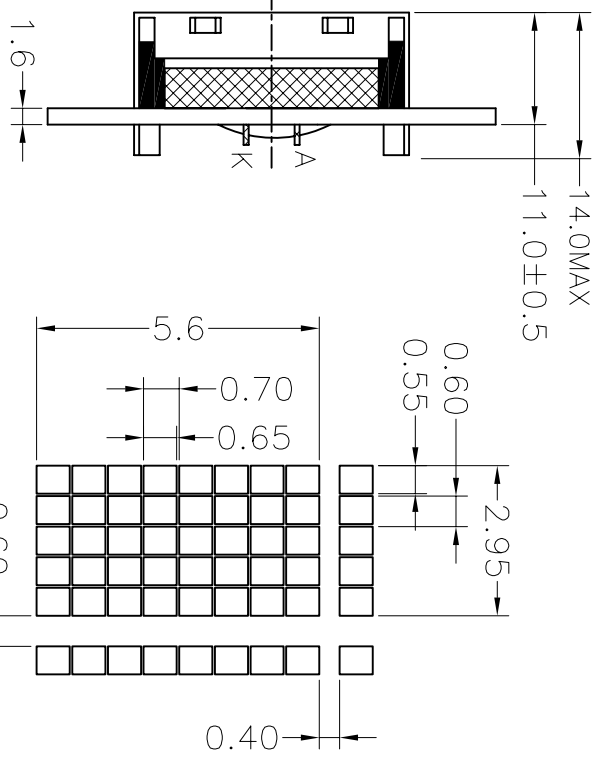

DOT SIZE
SCALE: 5:1

PIN	1	2	3	4	5	6	7	8
CONNECTOR	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
PIN	9	10	11	12	13	14	15	16
CONNECTOR	E	R/W	RS	VO	VDD	VSS	LEDA	LEDK

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAV-ABC016002G10-00			ABC016002G10-HHY
SCALE 比例		FIT 适应图面	
SHEET: 页次		1 OF 1	
GENERAL TOL: 公差		±0.3	
APP: 签字	APPROVALS	UNIT 单位	DATE 日期
CHK: 日期		mm	
DWN: 日期			