
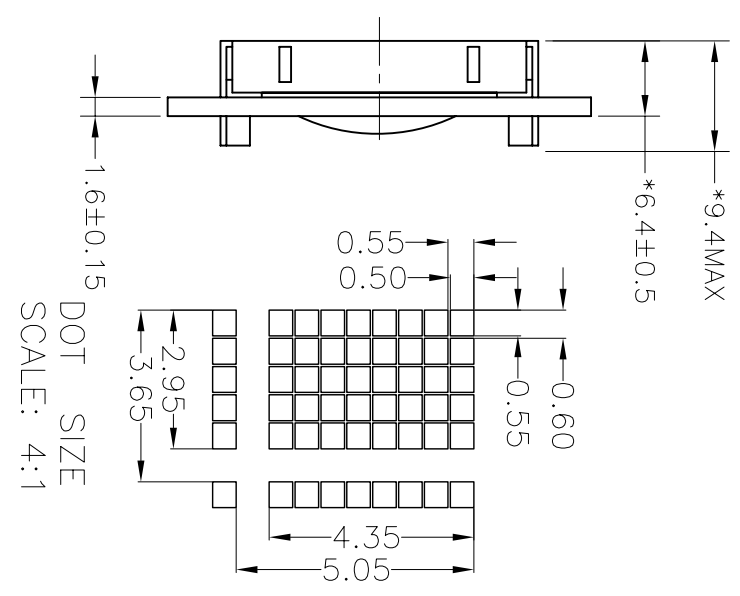
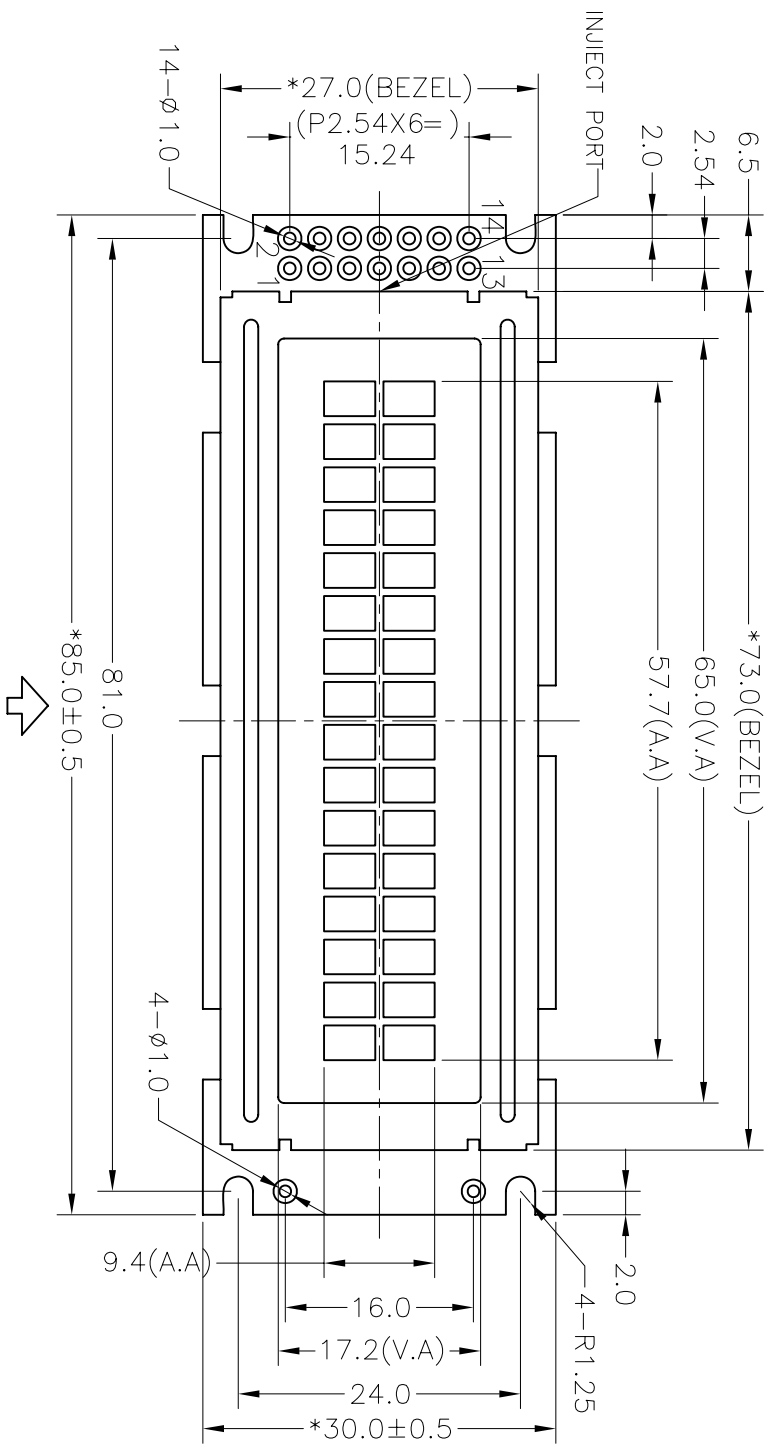


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	AUG-11-2007
B	Change LOGO 	Apr-08-2008



VIEWING DIRECTION 

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VDD	VSS	VO	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14		
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7		


DOT SIZE  
SCALE: 4:1

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:3.9V
- 2). Viewing direction: 6 O'clock
- 3). Display mode: STN/Positive/Reflective/Y-G
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). IC: SPLC780D-01(Or compatible)
- 7). Dimensions with mark "\*" are important, with mark "(") are referenced
- 8). All the raw materials are RoHS compliant



深圳秋田微电子有限公司  
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC016002F15-YGN-R		ABC016002F15-YGN-R	APP: CHK: DWN:	SHEET: 页次	1 OF 1
GENERAL TOL: $\pm$ 0.3			UNIT 单位	DATE 日期	
DO NOT SCALE THIS DRAWING.					