



REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	SEP-08-2007

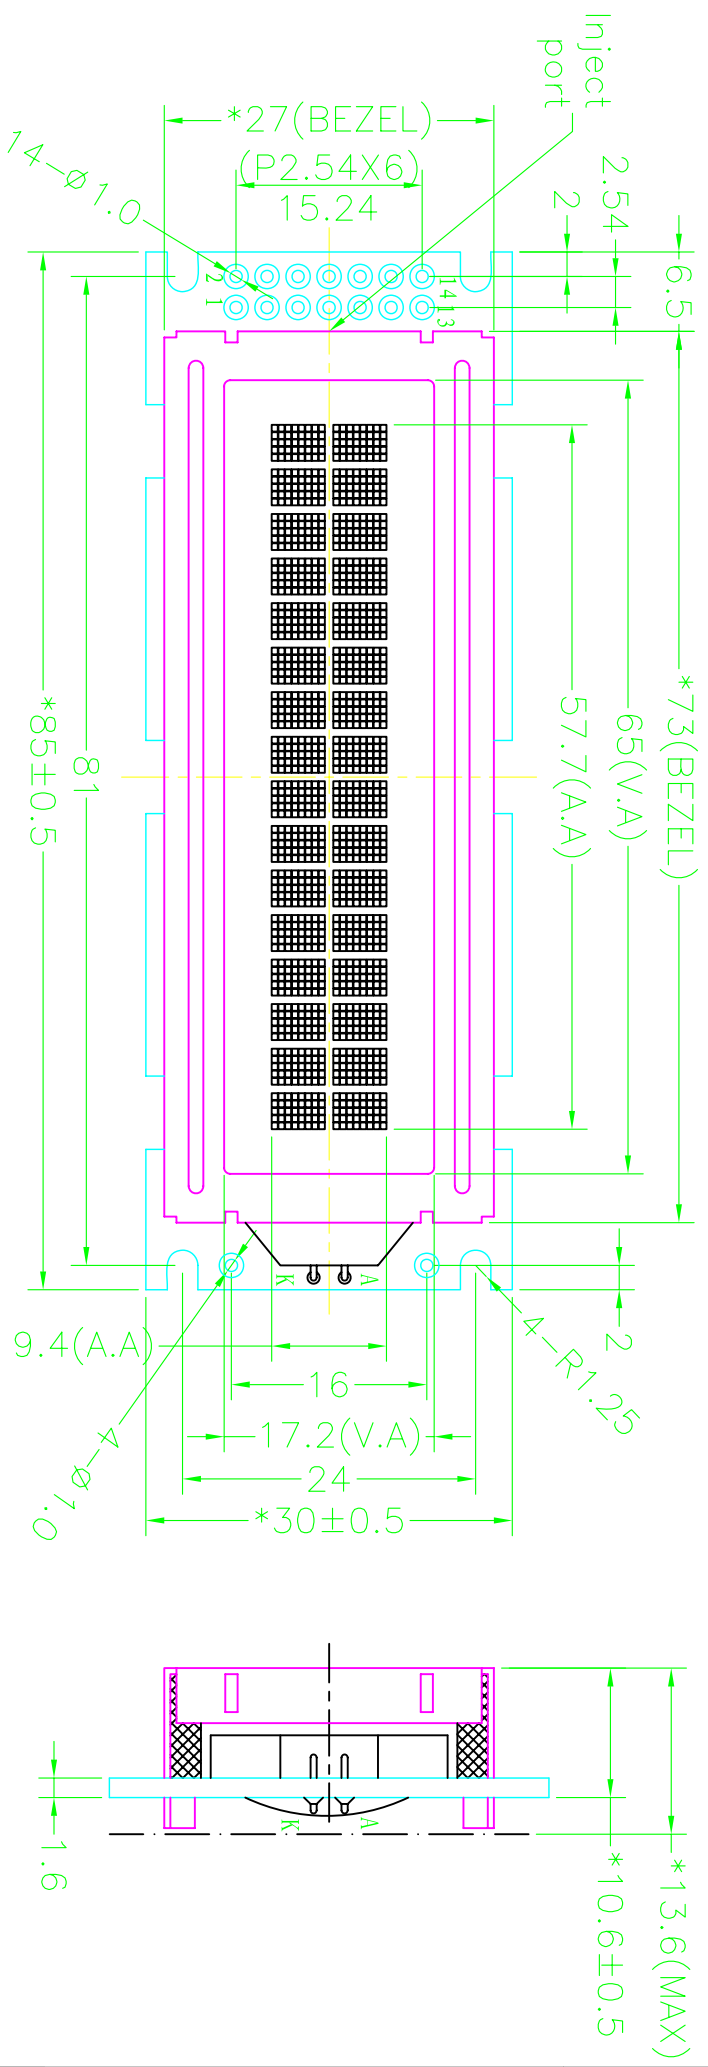

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.2V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: SPLC780D-001B-C
- 6). Backlight: Edge White
- 7). Dimensions with mark "*" are important, with mark "(") are referenced
- 8). All the raw materials are RoHS compliant

VIEWING DIRECTION →

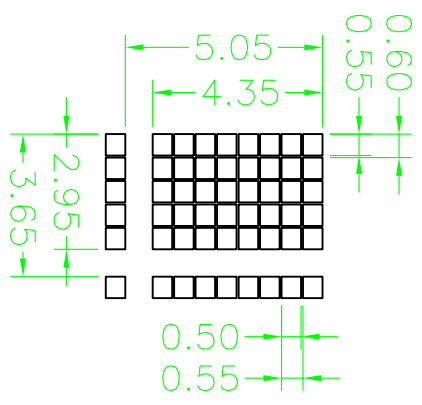

PIN	1	2	3	4	5	6	7
CONNECTOR	VDD	VSS	V0	RS	R/W	E	DB0
PIN	8	9	10	11	12	13	14
CONNECTOR	DB1	DB2	DB3	DB4	DB5	DB6	DB7

深圳市教田视佳实业有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC016002F11-BIW-R-01			ABC016002F11-BIW-R-01	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				APPROVALS 签字	DATE 日期
				CHK: DW.N:	

DO NOT SCALE THIS DRAWING.