
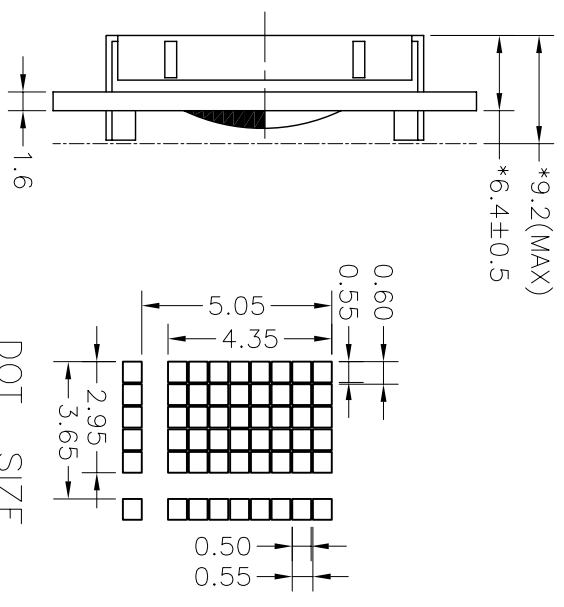
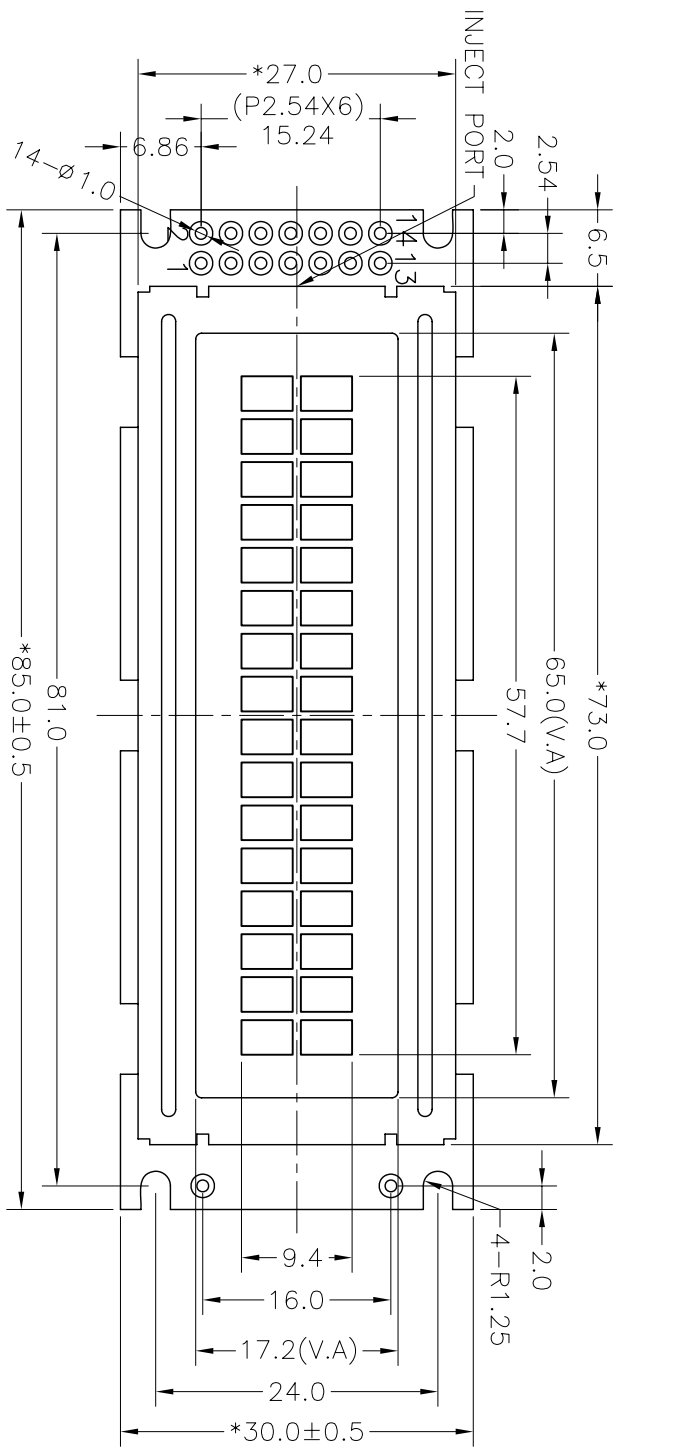



REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	SEP-01-2005
B	RoHS 	MAR-17-2008




VIEWING DIRECTION 

Specification:



- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:3.9V
- 2). Viewing direction: 6 O'clock
- 3). Display mode: TN/Positive/Reflective/Grey
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). IC: SPLC780D-001B-C (or compatible)
- 7). Dimensions with mark "\*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant. 

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VDD	VSS	VO	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14		
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7		

DOT SIZE  
SCALE: 3:1



**深圳秋田微电子有限公司**  
SHENZHEN AVIDISPLAY CO.,LTD.

PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	APPROVALS 签字	UNIT 单位 mm
ABC016002F06-TGN-R			ABC016002F06-TGN-R	CHK: DWN:	DATE

SCALE: FIT 适应图面  
SHEET: 1 OF 1  
GENERAL TOL:  $\pm$ 0.3  
DO NOT SCALE THIS DRAWING.