
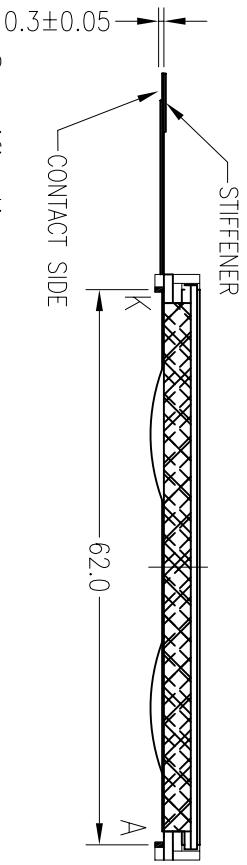


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	SEP-27-2006
A01	RoHS ①	JUL-25-2007

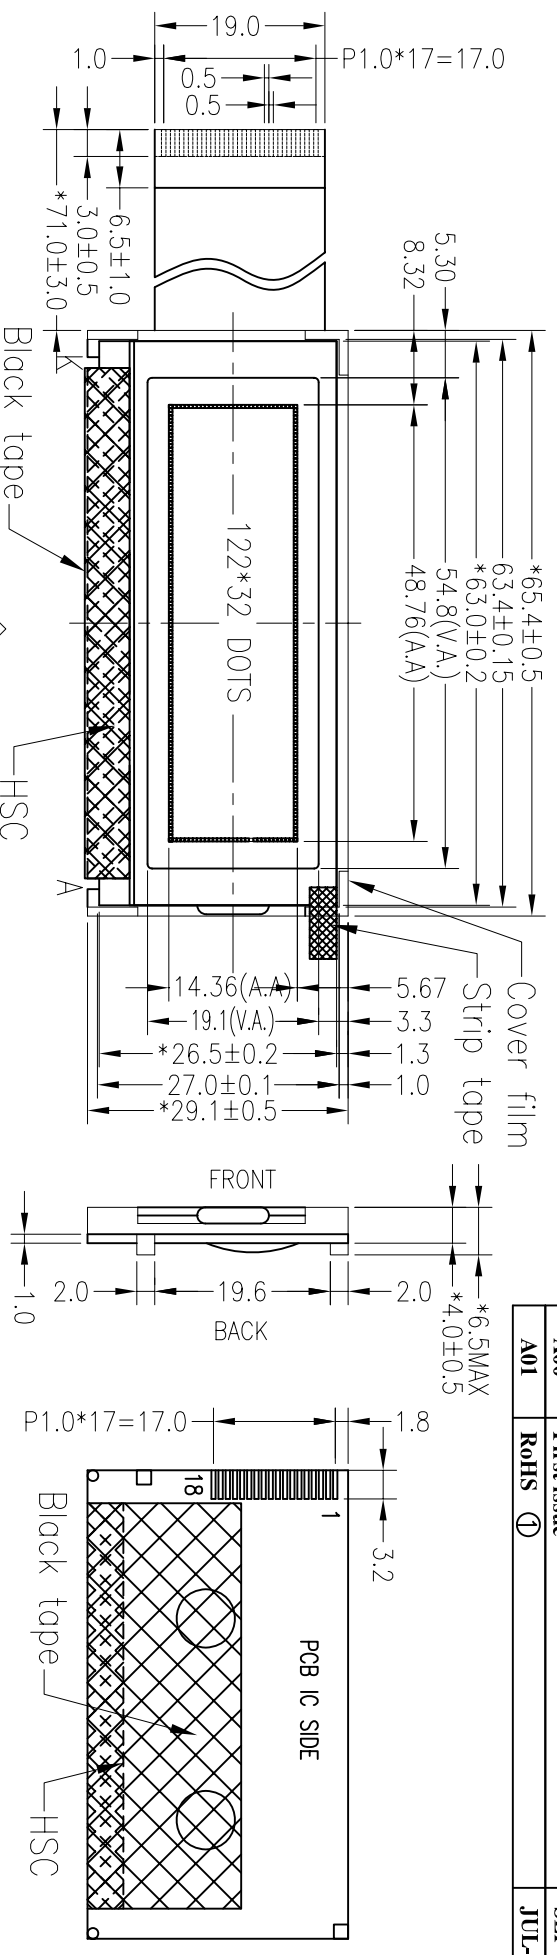



Specification:

- 1). Driving: Duty:1/32, Bias:1/5, VLCD:4.5V, VDD:5.0V
- 2). Viewing angle: 6 0'clock
- 3). Display mode: STN/Positive/Transflective/Grey
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C

- 6). Backlight: Side:Amber
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant ①

PIN	1	2	3	4	5	6	7	8	9
CONNECTION	VDD	VSS	V0	RST	E1	E2	R/W	A0	DB0
PIN	10	11	12	13	14	15	16	17	18
CONNECTION	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

DOTS SIZE
SCALE:10:1



深圳市秋田视佳实业有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FIT 适应图面
FAV-ABG122032F05-R-01			ABG122032F05-GHA-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				UNIT 单位	mm
				DATE 日期	
				CHK: 签字	
				DWN: 签字	