


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	MAR-23-2006

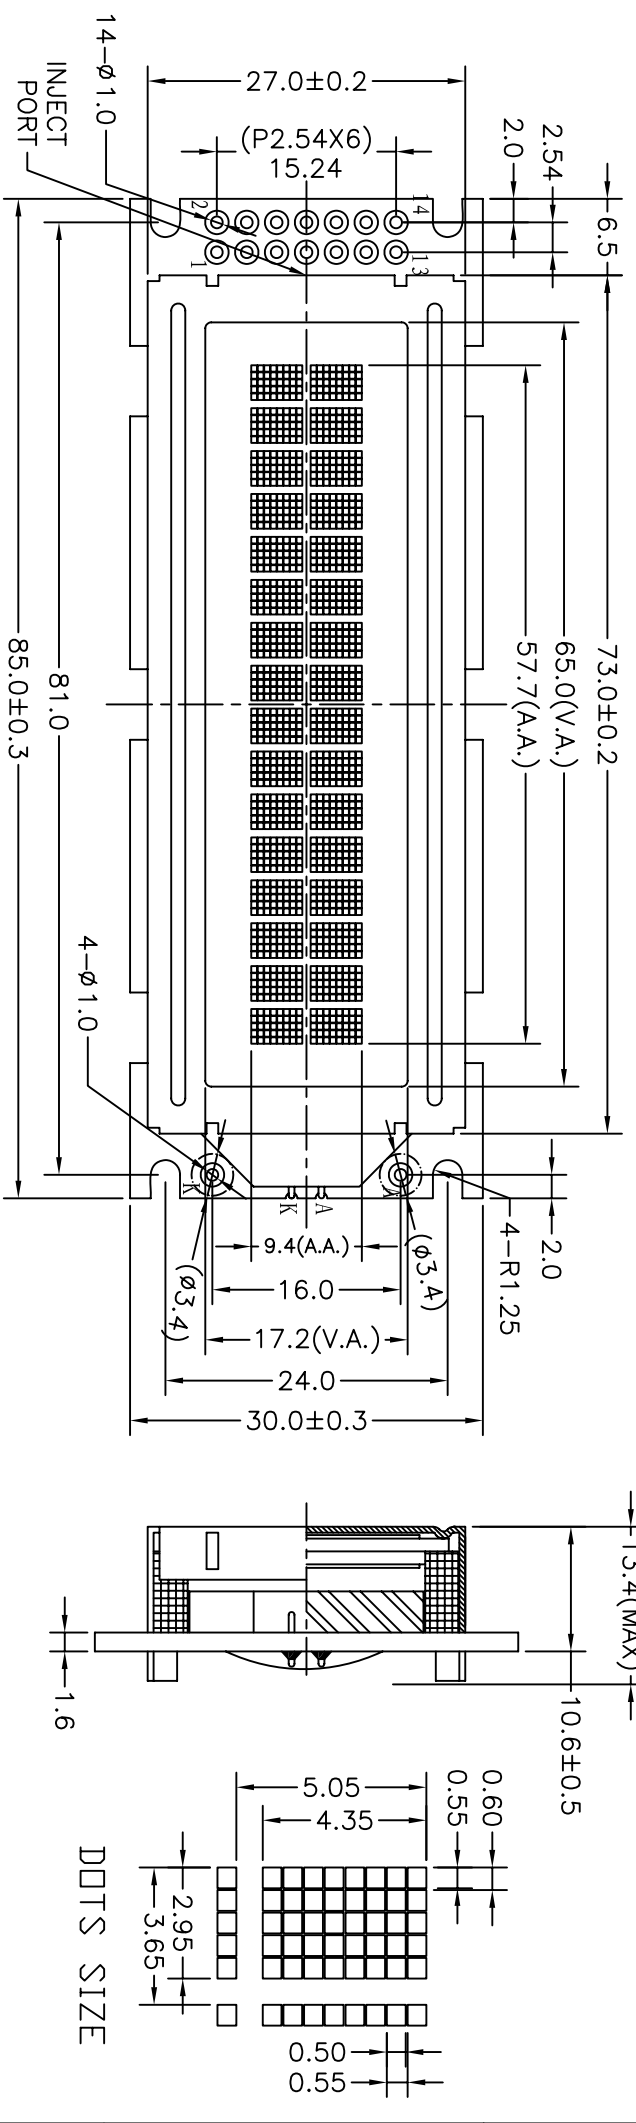

viewing direction

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:3.9V, VDD:5.0V
 - 2). Viewing angle: 6 0'clock
 - 3). Display mode: STN/Positive/Transflective/YG
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 6). IC: S6A0069X01-COCX
 - 7). Backlight: Side:Green
- Dimensions with mark "*" are important, with mark "()" are referenced

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14
CONNECTION	VDD	VSS	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAY-ABC016002F09-00			ABC016002F09-YHG
SCALE: FIT 适应图面		SHEET: 1 OF 1	
GENERAL TOL: ±0.3		UNIT 公差	
APP: 签字	DATE	DATE	
CHK:			
DWN:			