


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	MAY-18-2005

VIEWING DIRECTION

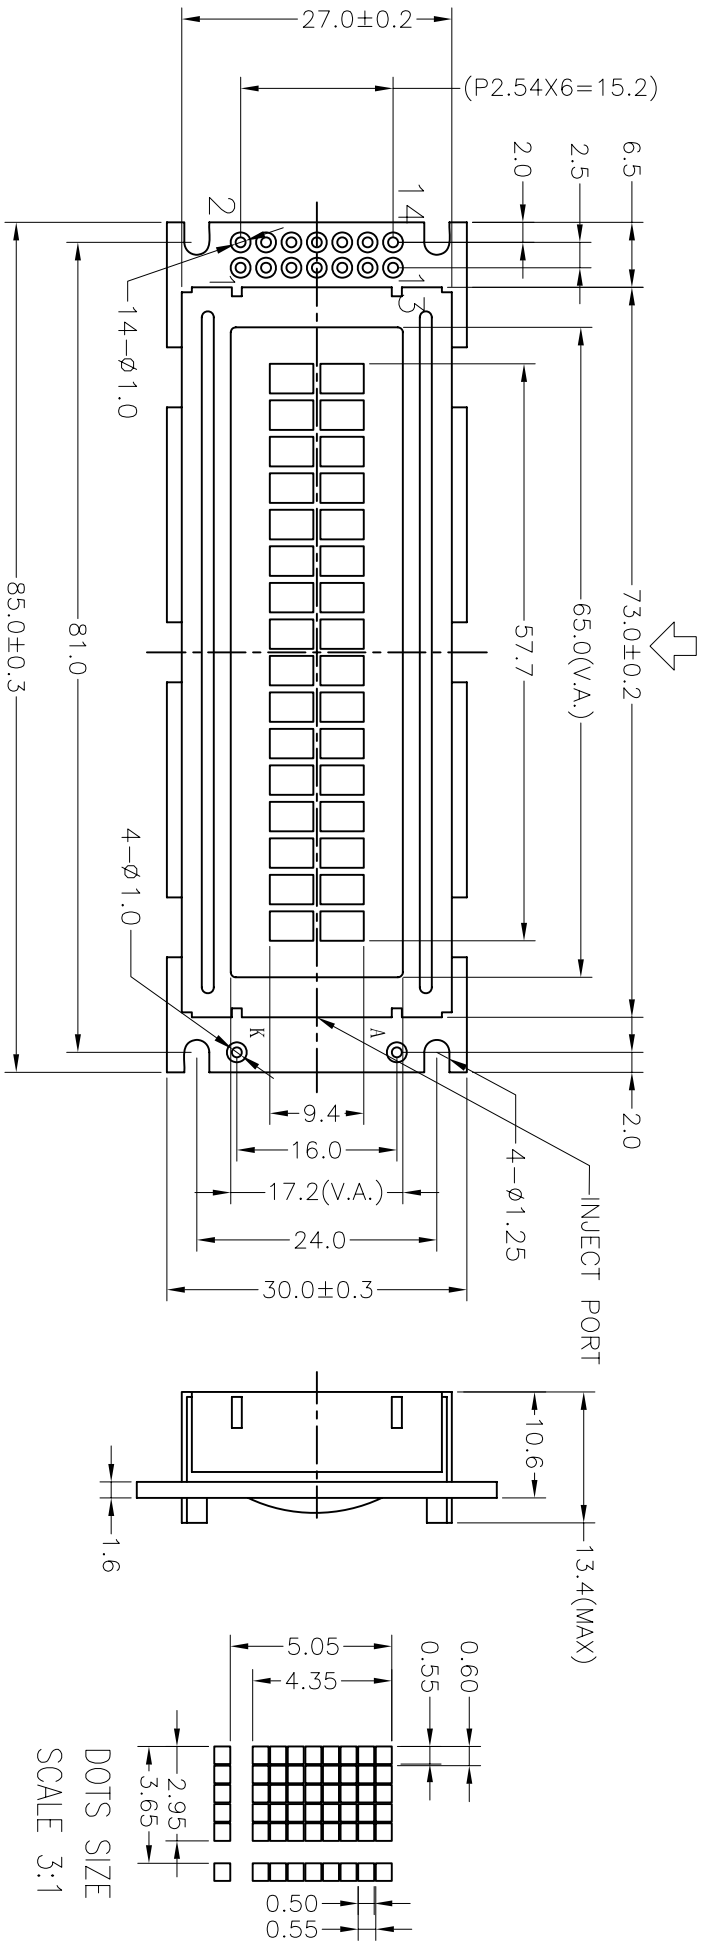

PIN	1	2	3	4	5	6	7
CONNECTION	VDD	VSS	V0	RS	R/W	E	DB0
PIN	8	9	10	11	12	13	14
CONNECTION	DB1	DB2	DB3	DB4	DB5	DB6	DB7

Specification:

- 1). Driving: Duty:1/16,Bias:1/5, VLCD:4.2V, VDD:5.0V
- 2). Viewing angle: 12 O'clock
- 3). Display mode:STN/Positive/Transflective/Gray
- 4). Operating temp.: $-20^{\circ}C \sim +70^{\circ}C$
Storage temp.: $-30^{\circ}C \sim +80^{\circ}C$
- 5). Drive IC: S6A0069X22(English/Russian character)
- 6). Backlight: Bottom, Yellow-Green
- 7). Dimensions with mark "*" are important, with mark "(") are referenced

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAV-ABC016002F03-00			ABC016002F03-GKY
SCALE 比例		FIT 适应图面	
SHEET: 页次		1 OF 1	
GENERAL TOL: 公差		±0.3	
APP:	APPROVALS 签字	DATE 日期	UNIT 单位 mm
CHK:	DWN: 张明娟		
			MAY-18-2005