



REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	Feb-25-2008

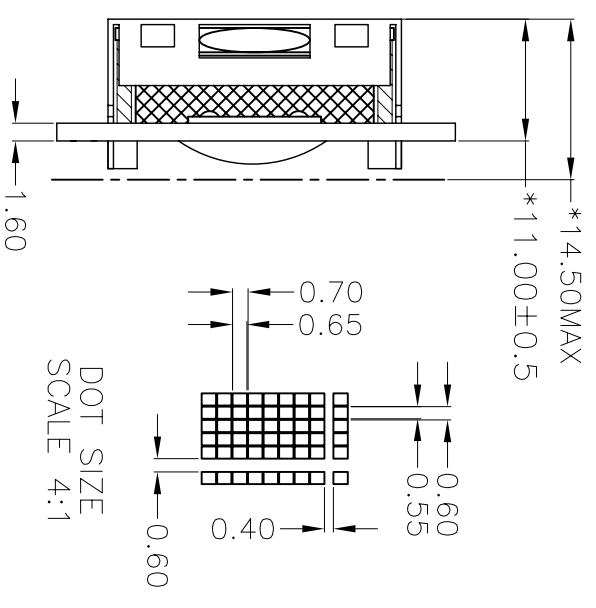


VIEWING DIRECTION

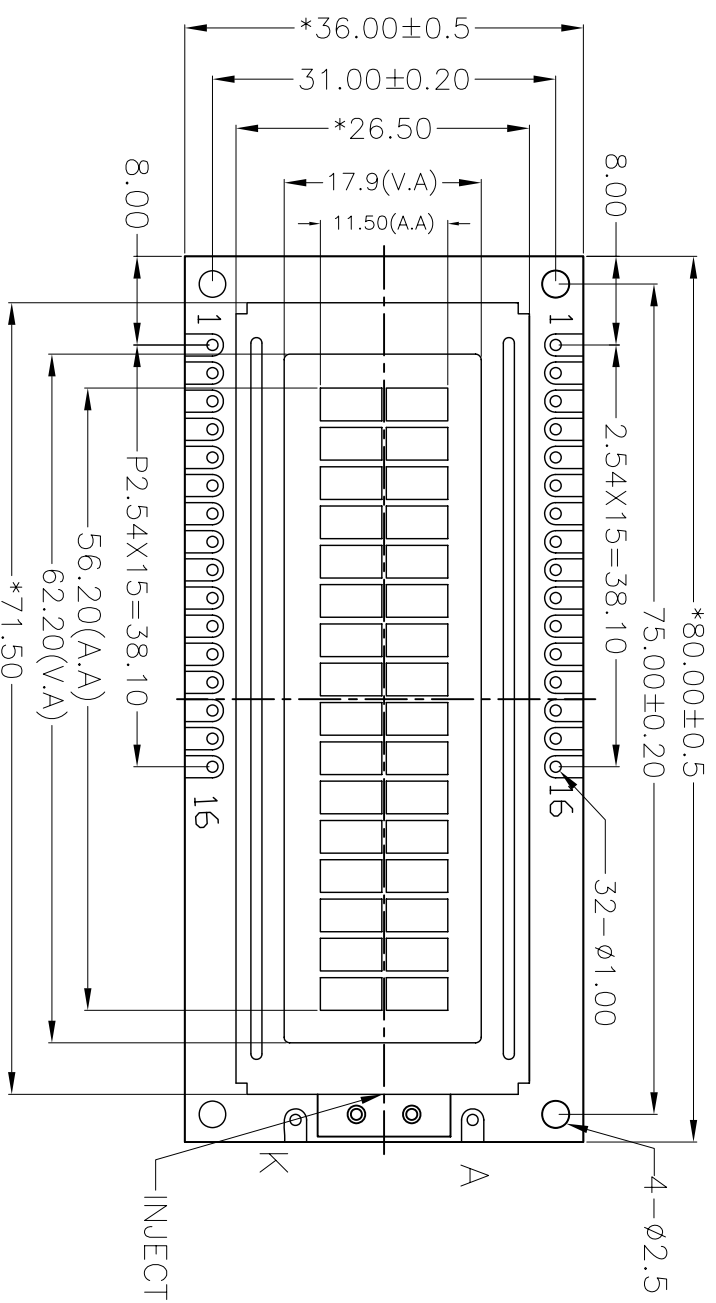

Specification:

- 1).Driving: 1/16 Duty, 1/5 Bias, Vcd: 4.2V VDD: 5.0V
- 2).Viewing angle: 6 0'clock
- 3).Display mode: STN/Transflective/Positive/Yellow-Green
- 4).Operating Temp: -20°C~+70°C
Storage Temp: -30 C~+80°C
- 5).Backlight: Bottom, Yellow-Green
- 6).Use IC: SPLC780D-001B-C(Or Compatible)
- 7).Dimensions with mark "*" are important, with mark "<>" are referenced
- 8).All the raw materials are RoHS compliant.

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	VO	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK



深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC016002A01-YHY-R-01			ABC016002A01-YHY-R-01	SHEET: 页次	OR
				1	1
				GENERAL TOL: 公差	UNIT 单位
				±0.3	mm
				APP: 签字	DATE 日期
				CHK: 签字	
				DWN: 签字	

DO NOT SCALE THIS DRAWING.